



KRAMER ELECTRONICS LTD.

# USER MANUAL

MODELS:

**611T, 611R**  
Fiber Optic  
Transmitter/Receiver

---

P/N: 2900-009009 Rev 5




## 611T, 611R Quick Start Guide

This guide helps you install and use your product for the first time. For more detailed information, go to <http://bit.ly/k-prod-downloads> to download the latest manual or scan the QR code on the left.

### Step 1: Check what's in the box

- 611T, 611R Fiber Optic Transmitter/Receiver
- 4 Rubber feet
- 1 Power supply (12V DC) per unit
- 1 Quick Start sheet




Save the original box and packaging materials in case you need to return your **611T, 611R** for service.

### Step 2: Install the 611T, 611R

Attach the rubber feet and place on a table or mount the **611T, 611R** in a rack (using an optional RK-3T rack mount).

### Step 3: Connect the inputs and outputs

Always switch off the power on each device before connecting it to your **611T, 611R**.

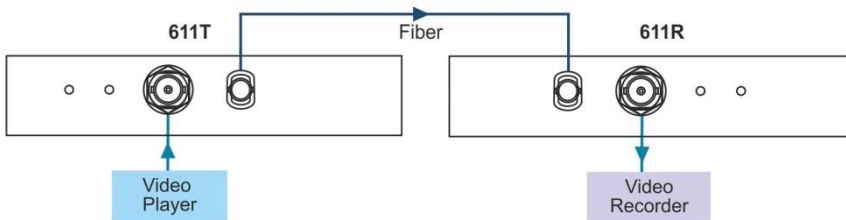

Always use Kramer high-performance cables for connecting AV equipment to the **611T, 611R**.

### Step 4: Connect the power

Connect the 12V DC power adapter to the **611T, 611R** and plug the adapter into the mains electricity.



# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
<b>2</b>	<b>Getting Started</b>	<b>2</b>
2.1	Achieving the Best Performance	2
2.2	Safety Instructions	3
2.3	Recycling Kramer Products	3
<b>3</b>	<b>Overview</b>	<b>4</b>
3.1	Defining the 611T, 611R Fiber Optic Transmitter/Receiver	4
<b>4</b>	<b>Connecting the 611T, 611R</b>	<b>6</b>
<b>5</b>	<b>Technical Specifications</b>	<b>8</b>

## Figures

Figure 1:	611T Fiber Optic Transmitter	4
Figure 2:	611R Fiber Optic Receiver	5
Figure 3:	Connecting the 611T, 611R Fiber Optic Transmitter/Receiver	7

---

# 1 Introduction

Welcome to Kramer Electronics! Since 1981, Kramer Electronics has been providing a world of unique, creative, and affordable solutions to the vast range of problems that confront video, audio, presentation, and broadcasting professionals on a daily basis. In recent years, we have redesigned and upgraded most of our line, making the best even better!

Our 1,000-plus different models now appear in 14 groups that are clearly defined by function: GROUP 1: Distribution Amplifiers; GROUP 2: Switchers and Routers; GROUP 3: Control Systems; GROUP 4: Format/Standards Converters; GROUP 5: Range Extenders and Repeaters; GROUP 6: Specialty AV Products; GROUP 7: Scan Converters and Scalers; GROUP 8: Cables and Connectors; GROUP 9: Room Connectivity; GROUP 10: Accessories and Rack Adapters; GROUP 11: Sierra Video Products; GROUP 12: Digital Signage; GROUP 13: Audio; and GROUP 14: Collaboration.

Congratulations on purchasing your Kramer **611T, 611R** *Fiber Optic Transmitter/Receiver*, which is ideal for the following typical applications:

- Remote monitoring systems for CCTV, medical, broadcast, and industrial use
- Signal distribution in broadcast and production studios
- Board room and other presentation systems
- Rental and staging applications

---

## 2 Getting Started

We recommend that you:

- Unpack the equipment carefully and save the original box and packaging materials for possible future shipment
- Review the contents of this user manual



Go to [http://www.kramerelectronics.com/support/product\\_downloads.asp](http://www.kramerelectronics.com/support/product_downloads.asp) to check for up-to-date user manuals, application programs, and to check if firmware upgrades are available (where appropriate).

### 2.1 Achieving the Best Performance

To achieve the best performance:

- Use only good quality connection cables (we recommend Kramer high-performance, high-resolution cables) to avoid interference, deterioration in signal quality due to poor matching, and elevated noise levels (often associated with low quality cables)
- Do not secure the cables in tight bundles or roll the slack into tight coils
- Avoid interference from neighboring electrical appliances that may adversely influence signal quality
- Position your Kramer **611T**, **611R** away from moisture, excessive sunlight and dust



This equipment is to be used only inside a building. It may only be connected to other equipment that is installed inside a building.

## 2.2 Safety Instructions



**Caution:** There are no operator serviceable parts inside the unit

**Warning:** Use only the Kramer Electronics input power wall adapter that is provided with the unit

**Warning:** Disconnect the power and unplug the unit from the wall before installing



**Warning: Class 1 Laser Product**

- Invisible laser radiation present
- Avoid long-term viewing of laser
- Avoid the use of magnifying viewing aids or instruments (such as binoculars, telescopes, microscopes and magnifying lenses, but not spectacles or contact lenses)
- Avoid placing optical devices in the emitted beam that could cause the concentration of the laser radiation to be increased

## 2.3 Recycling Kramer Products

The Waste Electrical and Electronic Equipment (WEEE) Directive 2002/96/EC aims to reduce the amount of WEEE sent for disposal to landfill or incineration by requiring it to be collected and recycled. To comply with the WEEE Directive, Kramer Electronics has made arrangements with the European Advanced Recycling Network (EARN) and will cover any costs of treatment, recycling and recovery of waste Kramer Electronics branded equipment on arrival at the EARN facility. For details of Kramer's recycling arrangements in your particular country go to our recycling pages at <http://www.kramerelectronics.com/support/recycling/>.

## 3 Overview

The **611T** and **611R** are a high-performance fiber optic transmitter and receiver for composite video signals. The **611T** transmitter converts a composite video signal into a fiber optic signal and the **611R** receiver converts the fiber optic signal back into a composite video signal.

More specifically, the **611T**, **611R** feature:

- 55MHz (-3dB) bandwidth
- Level (gain) and EQ (peaking) controls
- A range of 5km (3.1mi) using multi-mode fiber optic cable
- Laser standards compliance - IEC 60825-1, FDA 21CFR1040; Laser Class 1: Safety of laser products

### 3.1 Defining the 611T, 611R Fiber Optic Transmitter/Receiver

This section defines the **611T**, **611R**. [Figure 1](#) defines the **611T** transmitter and [Figure 2](#) defines the **611R** receiver.

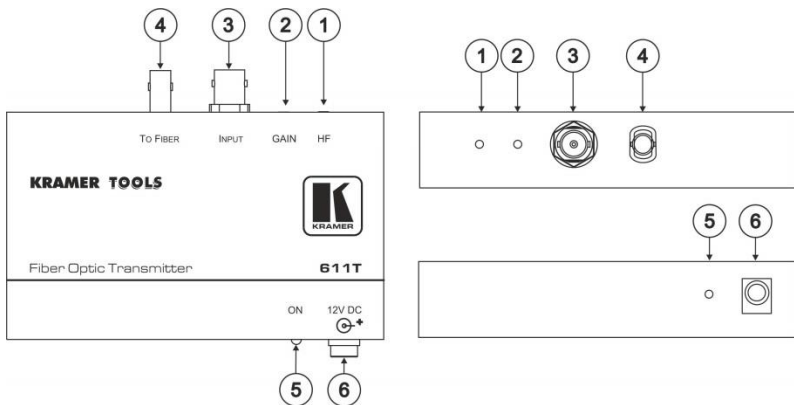


Figure 1: 611T Fiber Optic Transmitter

#	Feature	Function
1	<i>HF</i> Trimmer	Cable compensation (high frequency) control trimmer
2	GAIN Trimmer	Video level control trimmer
3	<i>INPUT</i> BNC Connector	Connects to a composite video source
4	<i>TO FIBER</i> Connector	"ST" type connector outputting the converted video signal to the optical fiber
5	<i>ON</i> LED	Illuminates when the unit is powered ON
6	12V DC Power Connector	Connects to the power supply to supply power to the unit

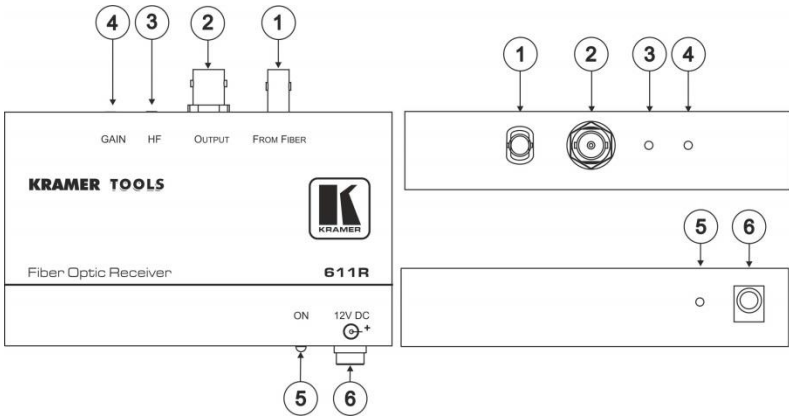


Figure 2: 611R Fiber Optic Receiver

#	Feature	Function
1	<i>FROM FIBER</i> Connector	"ST" type connector outputting the converted video signal to the optical fiber
2	<i>OUTPUT</i> BNC Connector	Connects to a composite video acceptor
3	<i>HF</i> Trimmer	Cable compensation (high frequency) control trimmer
4	GAIN Trimmer	Video level control trimmer
5	<i>ON</i> LED	Illuminates when the unit is powered ON
6	12V DC Power Connector	Connects to the power supply to supply power to the unit



---

## 4 Connecting the 611T, 611R



Always switch off the power to each device before connecting it to your **611T, 611R**. After connecting your **611T, 611R**, connect its power and then switch on the power to each device.

To connect the **611T, 611R** as illustrated in the example in [Figure 3](#):

1. On the **611T**, connect a composite video source (for example, a video player) to the INPUT BNC connector.
2. On the **611R**, connect the OUTPUT BNC connector to a composite video acceptor (for example, a video recorder).
3. Connect a fiber optic cable from the TO FIBER connector on the **611T** to the FROM FIBER connector on the **611R**.
4. Connect a 12V DC power supply to each of the units (not shown in the illustration).
5. As needed, adjust the HF and GAIN trimmers on each unit with a small screwdriver.

The units come pre-adjusted from the factory for optimum performance and transparent operation. Adjustment is not normally required if all cables and connectors are working properly.

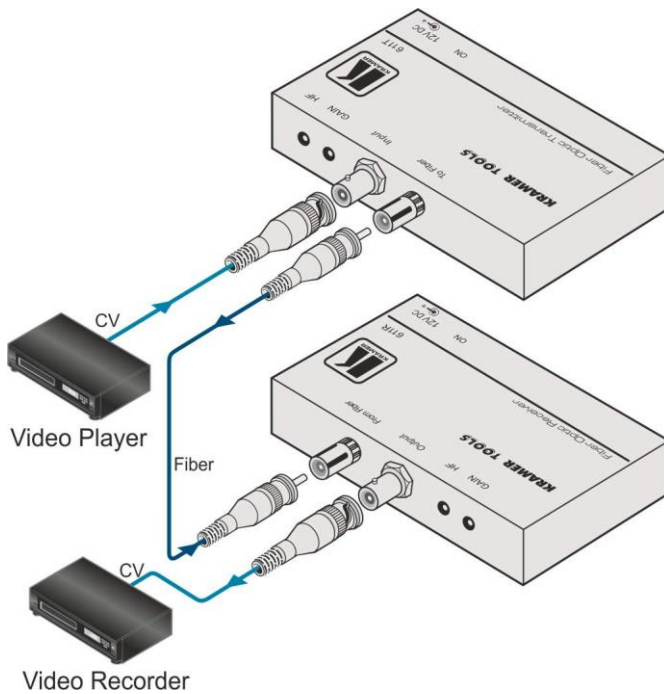


Figure 3: Connecting the 611T, 611R Fiber Optic Transmitter/Receiver

## 5 Technical Specifications

INPUT:	Composite video, 1Vpp/75Ω on a BNC connector (611T); fiber optic ST connector (611R)
OUTPUT:	Fiber optic ST connector (611T); composite video, 1Vpp/75Ω on a BNC connector (611R)
OPERATION DISTANCE:	Up to 5km (3.1mi)
VIDEO BANDWIDTH (-3dB):	55MHz
DIFF. GAIN:	0.4%
VIDEO S/N RATIO:	60dB
NON-LINEARITY:	0.6%
POWER CONSUMPTION:	12V DC, 80mA
OPERATING TEMPERATURE:	0° to +40°C (32° to 104°F)
STORAGE TEMPERATURE:	-40° to +70°C (-40° to 158°F)
HUMIDITY:	10% to 90%, RHL non-condensing
DIMENSIONS:	12cm x 7.5cm x 2.5cm (4.7" x 2.95" x 0.98") W, D, H.
WEIGHT:	0.27kg (0.59lbs) approx.
INCLUDED ACCESSORIES:	Power supply, mounting bracket
OPTIONS:	RK-3T 19" rack adapter
Specifications are subject to change without notice at <a href="http://www.kramerelectronics.com">http://www.kramerelectronics.com</a>	

## LIMITED WARRANTY

The warranty obligations of Kramer Electronics for this product are limited to the terms set forth below:

### What is Covered

This limited warranty covers defects in materials and workmanship in this product.

### What is Not Covered

This limited warranty does not cover any damage, deterioration or malfunction resulting from any alteration, modification, improper or unreasonable use or maintenance, misuse, abuse, accident, neglect, exposure to excess moisture, fire, improper packing and shipping (such claims must be presented to the carrier), lightning, power surges, or other acts of nature. This limited warranty does not cover any damage, deterioration or malfunction resulting from the installation or removal of this product from any installation, any unauthorized tampering with this product, any repairs attempted by anyone unauthorized by Kramer Electronics to make such repairs, or any other cause which does not relate directly to a defect in materials and/or workmanship of this product. This limited warranty does not cover cartons, equipment enclosures, cables or accessories used in conjunction with this product.

Without limiting any other exclusion herein, Kramer Electronics does not warrant that the product covered hereby, including, without limitation, the technology and/or integrated circuit(s) included in the product, will not become obsolete or that such items are or will remain compatible with any other product or technology with which the product may be used.

### How Long Does this Coverage Last

Seven years as of this printing; please check our Web site for the most current and accurate warranty information.

### Who is Covered

Only the original purchaser of this product is covered under this limited warranty. This limited warranty is not transferable to subsequent purchasers or owners of this product.

### What Kramer Electronics will do

Kramer Electronics will, at its sole option, provide one of the following three remedies to whatever extent it shall deem necessary to satisfy a proper claim under this limited warranty:

1. Elect to repair or facilitate the repair of any defective parts within a reasonable period of time, free of any charge for the necessary parts and labor to complete the repair and restore this product to its proper operating condition. Kramer Electronics will also pay the shipping costs necessary to return this product once the repair is complete.
2. Replace this product with a direct replacement or with a similar product deemed by Kramer Electronics to perform substantially the same function as the original product.
3. Issue a refund of the original purchase price less depreciation to be determined based on the age of the product at the time remedy is sought under this limited warranty.

### What Kramer Electronics will not do Under This Limited Warranty

If this product is returned to Kramer Electronics or the authorized dealer from which it was purchased or any other party authorized to repair Kramer Electronics products, this product must be insured during shipment, with the insurance and shipping charges prepaid by you. If this product is returned uninsured, you assume all risks of loss or damage during shipment. Kramer Electronics will not be responsible for any costs related to the removal or re-installation of this product from or into any installation. Kramer Electronics will not be responsible for any costs related to any setting up this product, any adjustment of user controls or any programming required for a specific installation of this product.

### How to Obtain a Remedy under this Limited Warranty

To obtain a remedy under this limited warranty, you must contact either the authorized Kramer Electronics reseller from whom you purchased this product or the Kramer Electronics office nearest you. For a list of authorized Kramer Electronics resellers and/or Kramer Electronics authorized service providers, please visit our web site at [www.kramerelectronics.com](http://www.kramerelectronics.com) or contact the Kramer Electronics office nearest you.

In order to pursue any remedy under this limited warranty, you must possess an original, dated receipt as proof of purchase from an authorized Kramer Electronics reseller. If this product is returned under this limited warranty, a return authorization number, obtained from Kramer Electronics, will be required. You may also be directed to an authorized reseller or a person authorized by Kramer Electronics to repair the product.

If it is decided that this product should be returned directly to Kramer Electronics, this product should be properly packed, preferably in the original carton, for shipping. Cartons not bearing a return authorization number will be refused.

### Limitation on Liability

THE MAXIMUM LIABILITY OF KRAMER ELECTRONICS UNDER THIS LIMITED WARRANTY SHALL NOT EXCEED THE ACTUAL PURCHASE PRICE PAID FOR THE PRODUCT. TO THE MAXIMUM EXTENT PERMITTED BY LAW, KRAMER ELECTRONICS IS NOT RESPONSIBLE FOR DIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY BREACH OF WARRANTY OR CONDITION, OR UNDER ANY OTHER LEGAL THEORY. Some countries, districts or states do not allow the exclusion or limitation of relief, special, incidental, consequential or indirect damages, or the limitation of liability to specified amounts, so the above limitations or exclusions may not apply to you.

### Exclusive Remedy

TO THE MAXIMUM EXTENT PERMITTED BY LAW, THIS LIMITED WARRANTY AND THE REMEDIES SET FORTH ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, REMEDIES AND CONDITIONS, WHETHER ORAL OR WRITTEN, EXPRESS OR IMPLIED. TO THE MAXIMUM EXTENT PERMITTED BY LAW, KRAMER ELECTRONICS SPECIFICALLY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IF KRAMER ELECTRONICS CANNOT LAWFULLY DISCLAIM OR EXCLUDE IMPLIED WARRANTIES UNDER APPLICABLE LAW, THEN ALL IMPLIED WARRANTIES COVERING THIS PRODUCT, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, SHALL APPLY TO THIS PRODUCT AS PROVIDED UNDER APPLICABLE LAW.

IF ANY PRODUCT TO WHICH THIS LIMITED WARRANTY APPLIES IS A "CONSUMER PRODUCT" UNDER THE MAGNUSON-MOSS WARRANTY ACT (15 U.S.C.A. §2301, ET SEQ.) OR OTHER APPLICABLE LAW, THE FOREGOING DISCLAIMER OF IMPLIED WARRANTIES SHALL NOT APPLY TO YOU, AND ALL IMPLIED WARRANTIES ON THIS PRODUCT, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR THE PARTICULAR PURPOSE, SHALL APPLY AS PROVIDED UNDER APPLICABLE LAW.

### Other Conditions

This limited warranty gives you specific legal rights, and you may have other rights which vary from country to country or state to state.

This limited warranty is void if (i) the label bearing the serial number of this product has been removed or defaced, (ii) the product is not distributed by Kramer Electronics or (iii) this product is not purchased from an authorized Kramer Electronics reseller. If you are unsure whether a reseller is an authorized Kramer Electronics reseller, please visit our Web site at [www.kramerelectronics.com](http://www.kramerelectronics.com) or contact a Kramer Electronics office from the list at the end of this document.

Your rights under this limited warranty are not diminished if you do not complete and return the product registration form or complete and submit the online product registration form. Kramer Electronics thanks you for purchasing a Kramer Electronics product. We hope it will give you years of satisfaction.



For the latest information on our products and a list of Kramer distributors, visit our Web site where updates to this user manual may be found.

**We welcome your questions, comments, and feedback.**

Web site: [www.kramerelectronics.com](http://www.kramerelectronics.com)

E-mail: [info@kramerel.com](mailto:info@kramerel.com)

CE



**SAFETY WARNING**

Disconnect the unit from the power supply before opening and servicing



P/N: 2900-009009



Rev: 5