



# CH-520TXAHS

HDMI/PC Video Scaler over CAT5e/6/7 with LAN/IR/  
RS-232/Bidirectional PoE Transmitter



Operation Manual



## **DISCLAIMERS**

The information in this manual has been carefully checked and is believed to be accurate. Cypress Technology assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

Cypress Technology assumes no responsibility for any inaccuracies that may be contained in this document. Cypress also makes no commitment to update or to keep current the information contained in this document.

Cypress Technology reserves the right to make improvements to this document and/or product at any time and without notice.

## **COPYRIGHT NOTICE**

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from Cypress Technology.

© Copyright 2014 by Cypress Technology. All Rights Reserved.

Version 1.0 January 2014

## **TRADEMARK ACKNOWLEDGMENTS**

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.





## SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

## REVISION HISTORY

VERSION NO.	DATE DD/MM/YY	SUMMARY OF CHANGE
VR0	20/03/15	Preliminary release
VR1	30/05/16	Add RS-232 Command
VR2	15/12/16	Add WUXGA's Input Timing



# CONTENTS

<b>1. Introduction</b> .....	<b>1</b>
<b>2. Applications</b> .....	<b>1</b>
<b>3. Package Contents</b> .....	<b>1</b>
<b>4. System Requirements</b> .....	<b>1</b>
<b>5. Features</b> .....	<b>2</b>
<b>6. Operation Controls and Functions</b> .....	<b>3</b>
6.1 Front Panel .....	3
6.2 Rear Panel.....	4
6.3 Remote Control .....	5
6.4 IR Cable Pin Assignment.....	6
6.5 RS-232 Pin Definitions.....	7
6.6 RS-232 Commands.....	8
6.7 OSD Menu .....	10
6.8 Input Resolution Support .....	13
<b>7. Connection Diagram</b> .....	<b>14</b>
<b>8. Specifications</b> .....	<b>15</b>
<b>9. Acronyms</b> .....	<b>16</b>





## 1. INTRODUCTION

The HDMI/PC video scaler with LAN/IR/RS-232/Bidirectional PoE over Single CAT5e/6/7 transmitter can send uncompressed audio/video over a single run of CAT5e/6/7 cable up to 100 m with Bidirectional PoE feature. The system supports various ways of control that can be done through on-panel buttons, IR remote, RS-232, and OSD. The device provides full range of output resolutions through CAT5e/6/7 up to 1080p for HDTV timing and WUXGA(RB) for PC timing.

## 2. APPLICATIONS

- Scale low resolution video onto High-Definition display
- HDMI/PC signals extension
- Lecture room/Showroom/Meeting room/Classroom display and control

## 3. PACKAGE CONTENTS

- HDMI/PC to CAT5e/6/7 with LAN/IR/RS-232/Bidirectional PoE Transmitter
- IR Extender x 1
- IR Blaster x 1
- 24 V/2.7 A DC Power Adaptor
- Power Cable
- Remote control with battery(CR-128)
- Operation Manual

## 4. SYSTEM REQUIREMENTS

Input HDMI/PC source equipment such as DVD/Video player or PC/ Laptop and output to HDBaseT compatible Receiver.

## 5. FEATURES


- Supports HDMI/PC input scaler to full range of HDTV and PC output resolutions through CAT5e/6/7
- Transmission of uncompressed data over a single 100 m/328 ft CAT5e/6/7 cable
- 5Play™ convergence: Video, Audio, LAN, Bidirectional PoE & Control (IR & RS-232 bypass)
- Supports IR, Remote control, RS-232 (bypass) and on-panel controls
- Supports OSD (On Screen Display) selection and display system information
- Provides 24V DC power to or received from compatible PoE Receiver through CAT5e/6/7
- Supports Ethernet transmission rate up to 100Mbps

**Note:**

- 1. This system was tested with CAT6/23AWG cables, results may vary with cables of a different specification.*
- 2. The PoE function is designed for powering compatible Receiver units only—non-PoE Receivers will need their own power supply. Receivers of another brand may not be compatible.*

## 6. OPERATION CONTROLS AND FUNCTIONS


### 6.1 Front Panel

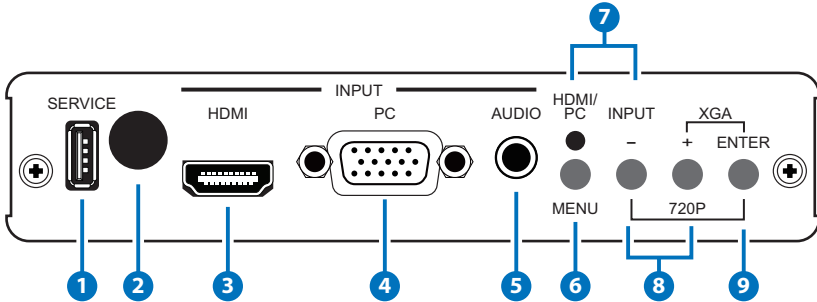

- 1 SERVICE:** This port is reserved for firmware update only.
- 2 IR:** IR Receiver window (accepts the remote control signal of this device only).
- 3 HDMI:** Connect to source equipment such as DVD/Video player for video signal sending.
- 4 PC:** Connect with PC/Laptop source equipment for signal input with D-Sub 15 pin cable.
- 5 AUDIO:** Connect to audio source equipment for L/R stereo audio input with 3.5mm phone jack.
- 6 MENU:** Press this button to enter into the OSD menu.
- 7 – INPUT & HDMI/PC LED:** Press to select HDMI or PC source input. When in HDMI mode the LED will illuminate in Red, when in PC mode the LED will illuminated in Green.
- 8 -/+:** Press these buttons to scroll down and up in the OSD selection.
- 9 ENTER:** Press this button to confirm the selection. Press this button together with [-] key to switch output timing to 720p@60 instantly. Press this button together with [+] key to switch output timing to XGA (1024x768) instantly.




## 6.2 Rear Panel

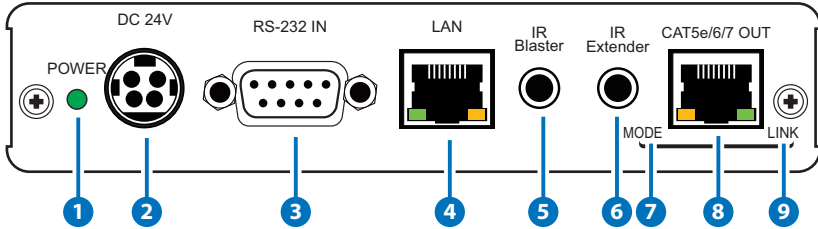



- 1 Power LED:** This LED will illuminate when the device is connected with power supply.
- 2 DC 24V:** Plug the 24 V DC power supply into the unit and connect the adaptor to an AC outlet. Only one side of power is needed to activate both Transmitter and Receiver when both obtain the PoE function.
- 3 RS-232 IN:** Connect to a PC or Laptop with D-Sub 9-pin male cable to bypass RS-232 commands to Receiver end.
- 4 LAN:** Connect to an active network LAN for LAN sharing of a total transmission rate up to 100Mbps. Or when a compatible LAN equipped Receiver is connected to an active network, this allows the network access (including internet access if available) to be shared between the Transmitter and Receiver. Connect any Ethernet equipped device e.g. a Smart TV or games console to the LAN port for that device to share the network internet access.  
**Note:** DO NOT connect this slot with any of the CAT5e/6/7 port. Doing so may trigger power shoot down and ruin the device.
- 5 IR Blaster:** Connect to the supplied IR Blaster cable for IR signal transmission. Place the IR Blaster in direct line-of-sight of the equipment to be controlled.
- 6 IR Extender:** Connect to the supplied IR Receiver cables for IR signal reception. Ensure that remote being used is within the direct line-of-sight of the IR Extender.
- 7 MODE LED:** This LED will illuminated when the power is connected.
- 8 Link LED:** This LED will illuminate when the slot has been connected to the Receiver and the Receiver has connected with display that shows image on screen.
- 9 CAT5e/6/7 Out:** Connect to the Receiver unit with a single CAT5e/6/7 cable for transmission of all data signals.

### 6.3 Remote Control

- 1 INPUT:** Press this button to switch HDMI/PC input source instantly.
- 2 EXIT:** Press this button to exit the menu or escape the current selection under OSD.
- 3 MENU:** Press this button to enter into the OSD menu.
- 4 RESET:** Press this button to set the device back into the factory default setting.
- 5 AUTO ADJUST:** Press this button to optimize the positioning of the picture (picture centering) on the screen.
- 6 ENTER & ▲▼◀▶:** Press Enter to confirm the selection or press the arrow buttons to scroll in the OSD selections.

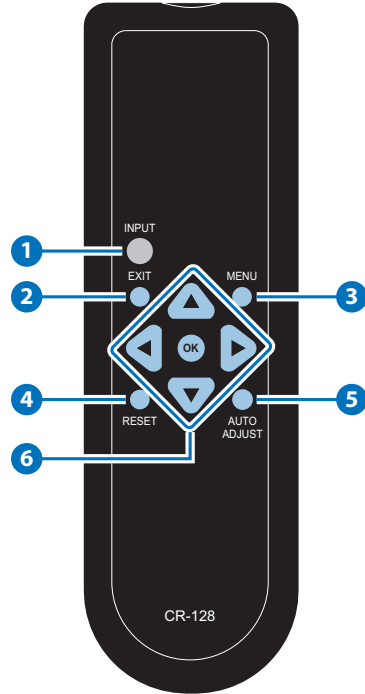

## 6.4 IR Cable Pin Assignment

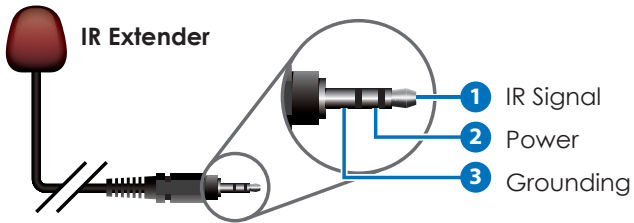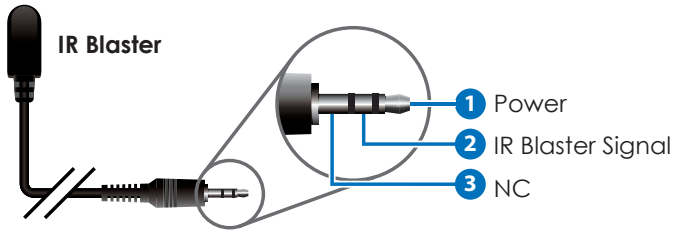



## 6.5 RS-232 Pin Definitions

PIN	DEFINE TX/RX
1	N/C
2	TxD/RxD
3	RxD/TxD
4	N/C
5	GND
6	N/C
7	N/C
8	N/C
9	N/C

Baud Rate: 9600bps

Data bit: 8 bits

Parity: None

Flow Control: None

Stop Bit: 1

## 6.6 RS-232 Commands

COMMAND	DESCRIPTION
<b>S SOURCE 1~2</b>	1=PC 2=HDMI
<b>R SOURCE</b>	Reports the numerical equivalent for SOURCE setting (as above)
<b>S OUTPUT 0~25</b>	0=Native 1=640×480 2=800×600 3=1024×768 5=1360×768 6=1280×720 7=1280×800 8=1280×1024 9=1440×900 10=1400×1050 11=1680×1050 12=1600×1200 13=1920×1080 16=1920×1200 17=480p 18=720p@60 19=1080p@60 20=1080i@60 22=576p 23=720p@50 24=1080p@50 25=1080i@50
<b>R OUTPUT</b>	Reports the numerical equivalent for OUTPUT setting (as above)
<b>S SIZE 0~6</b>	0=OVERSCAN 1=FULL 2=BEST FIT 3=PAN SCAN 4=LETTER BOX 5=UNDER 2 6=UNDER 1
<b>R SIZE</b>	Reports the numerical equivalent for SIZE setting (as above)
<b>S SYNCSHIFT 0/1</b>	0=OFF 1=ON
<b>R SYNCSHIFT</b>	Reports the numerical equivalent for Syncshift setting
<b>S CONTRAST 0~60</b>	Setups the numerical equivalent for CONTRAST setting (as left)
<b>R CONTRAST</b>	Reports the numerical equivalent for CONTRAST setting
<b>S BRIGHTNESS 0~60</b>	Setups the numerical equivalent for BRIGHTNESS setting (as left)
<b>R BRIGHTNESS</b>	Reports the numerical equivalent for BRIGHTNESS setting

<b>S HUE 0~60</b>	Setups the numerical equivalent for HUE setting (as left)
<b>R HUE</b>	Reports the numerical equivalent for HUE setting
<b>S SATURATION 0~60</b>	Setups the numerical equivalent for SATURATION setting (as left)
<b>R SATURATION</b>	Reports the numerical equivalent for SATURATION setting
<b>S SHARPNESS 0~30</b>	Setups the numerical equivalent for SHARPNESS setting (as left)
<b>R SHARPNESS</b>	Reports the numerical equivalent for SHARPNESS setting
<b>S NR 0~3</b>	0=OFF 1=LOW 2=MIDDLE 3=HIGH
<b>R NR</b>	Reports the numerical equivalent for the NOISE REDUCTION setting (as above)
<b>S AUDIO DELAY 0~3</b>	0=OFF 1=40ms 2=110ms 3=150ms
<b>R AUDIO DELAY</b>	Reports the numeric equivalent for AUDIO DELAY setting (as above)
<b>S AUDIO MUTE 0/1</b>	0=ON 1=MUTE
<b>R AUDIO MUTE</b>	Reports the numeric equivalent for AUDIO MUTE setting (as above)
<b>S KEY LOCK 0/1</b>	0=ENABLE 1=DISABLE
<b>R KEY LOCK</b>	Reports the numeric equivalent for KEY LOCK setting (as above)
<b>S AUTOSCAN 0/1</b>	0=DISABLE 1=ENABLE
<b>R AUTOSCAN</b>	Reports the numeric equivalent for AUTO SCAN setting (as above)
<b>FW</b>	Checks the FIRMWARE version
<b>S RESET 1</b>	Setups the numerical equivalent for RESET setting (as left)
<b>S PCAUTO 1</b>	Setups the numerical equivalent for PC AUTO setting (as left)

**Note:**

1. All the RS-232 command will be not executed unless followed with

- carriage return and LF (Line Feed).
- 2. Commands are case-insensitive.
- 3. Resolution 1~16 are RGB encoded and 17~25 are YUV encoded.

## 6.7 OSD Menu

1 <sup>st</sup> Layer	2 <sup>nd</sup> layer	3 <sup>rd</sup> Layer		
DISPLAY	OUTPUT	Native		
		640X480 60		
		800x600 60		
		1024x768 60		
		1360x768 60		
		1280x720 60		
		1280x800 60		
		1280x1024 60		
		1440x900 60		
		1400x1050 60		
		1680x1050 60		
		1600x1200 60		
		1920x1080 60		
		1920x1200 60		
		720X480P 60		
		<b>1280X720P 60</b>		
		1920X1080I 60		
		1920X1080P 60		
		720X576P 50		
		1280X720P 50		
		1920X1080I 50		
		1920X1080P 50		
			SIZE	OVER SCAN

		<b>FULL</b>		
		ASPECT RATIO		
		PAN SCAN		
		LETTER BOX		
		UNDER 2		
		UNDER 1		
	MODE INFO	<b>INFO</b>		
		ON		
		OFF		
	PC(PC mode only)	AUTO SETUP	No YES	
		H_POSITION	0~60 (30)	
		V_POSITION	0~60 (30)	
		PHASE		
		CLOCK		
		WXGA/XGA	<b>XGA</b> WXGA	
		RESET	NO YES	
		TIMING SHIFT	<b>OFF</b> ON	
		COLOR	R	
			G	
	B			
	R OFFSET			
	G OFFSET			
	B OFFSET			
	CONTRAST	0~60		
COLOR	BRIGHTNESS	0~60		



	HUE	0~60
	SATURATION	0~60
	SHARPNESS	0~30
	NR.	<b>OFF</b>
		LOW
		MIDDLE
		HIGH
AUDIO	VOLUME	0~100
	DELAY	<b>OFF</b>
		40mS
		110mS
		150mS
SOUND	<b>ON</b>	
	MUTE	
SETUP	FACTORY RESET	<b>NO</b>
		YES
	KEY LOCK	<b>OFF</b>
		ON
	AUTO SCAN	<b>OFF</b>
		ON
INFORMATION	INPUT	
	OUTPUT	
	REVISION	


**Note:** **Bold** Italian fonts are the Factory default setting. ( ) are default settings.



## 6.8 Input Resolution Support

INPUT RESOLUTION	HDMI	PC
NTSC/PAL	-	-
VGA@60/72/75 Hz	✓	✓
SVGA@56/60/72/75 Hz	✓	✓
XGA@60/70/75 Hz	✓	✓
SXGA@60/75 Hz	✓	✓
UXGA@60 Hz	✓	✓
1280×800@60 Hz	✓	✓
1680×1050RB@60 Hz	✓	✓
1920×1080@60 Hz	✓	✓
1920×1200RB@60 Hz	✓	✓
480i/576i	✓	-
480p/576p	✓	-
720p@50/60 Hz	✓	-
1080i@50/60 Hz	✓	-
1080p@50/60 Hz	✓	-

## 7. CONNECTION DIAGRAM

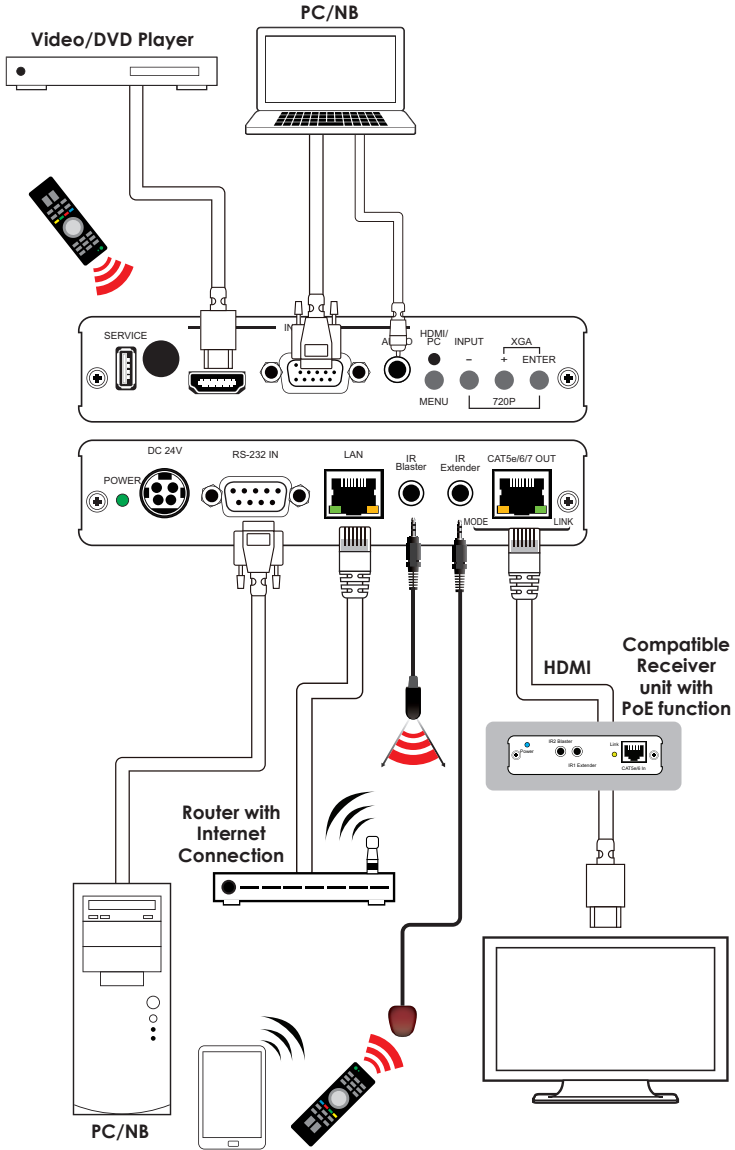



## 8. SPECIFICATIONS

<b>Output Video Bandwidth</b>	300MHz / 10.2Gbps
<b>Ethernet Speed</b>	100 Mbps
<b>Input Ports</b>	1 x HDMI, 1 x PC, 1 x 3.5mm Phone Jack (L/R) , 1 x RS-232, 1×LAN, 1 x IR Extender
<b>Output Ports</b>	1×CAT5e/6, 1×IR Blaster
<b>CAT5e/6/7 Output Cable Distance</b>	Up to 100 Meters
<b>Supports Resolution</b>	HD: 480i~1080p PC: VGA ~ WUXGA(RB)
<b>CAT5e/6/7 Output Resolution</b>	HD: Up to 1080p@60Hz PC: Up to WUXGA(RB)
<b>IR Frequency</b>	30~50kHz
<b>Power Supply</b>	24V/2.7A DC (US/EU standards, CE/FCC/UL certified)
<b>ESD Protection</b>	Human body model: ±8kV (air-gap discharge) ±4kV (contact discharge)
<b>Dimensions (mm)</b>	145 (W) x 192 (D) x 30(H)/Jacks Excluded 145 (W) x 202 (D) x 30(H)/Jacks Included
<b>Weight (g)</b>	608
<b>Chassis Material</b>	Aluminum
<b>Silkscreen Color</b>	Black
<b>Operating Temperature</b>	0°C~40°C / 32°F~104°F
<b>Storage Temperature</b>	-20°C ~ 60°C / -4 °F ~ 140 °F
<b>Relative Humidity</b>	20 ~ 90% RH (non-condensing)
<b>Power Consumption</b>	17W

## 9. ACRONYMS

ACRONYM	COMPLETE TERM
<b>CAT5e</b>	Category 5 Cable
<b>CAT6</b>	Category 6 Cable
<b>CAT7</b>	Category 7 Cable
<b>CV</b>	Composite Video
<b>DVI</b>	Digital Visual Interface
<b>HDMI</b>	High-Definition Multimedia Interface
<b>IR</b>	Infrared
<b>WUXGA (RB)</b>	Widescreen Ultra Extended Graphics Array (Reduce blanking)







**CYPRESS TECHNOLOGY CO., LTD**  
Home page: <http://www.cypress.com.tw>

MPM-CH520TXAHS