



CHDBT-1H1CL

1×2 HDMI over HDMI and CAT5e/6/7 Splitter
with IR/RS-232



Operation Manual

DISCLAIMERS

The information in this manual has been carefully checked and is believed to be accurate. Cypress Technology assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

Cypress Technology assumes no responsibility for any inaccuracies that may be contained in this document. Cypress also makes no commitment to update or to keep current the information contained in this document.

Cypress Technology reserves the right to make improvements to this document and/or product at any time and without notice.

COPYRIGHT NOTICE

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from Cypress Technology.

© Copyright 2011 by Cypress Technology.

All Rights Reserved.

Version 1.0 September 2011

TRADEMARK ACKNOWLEDGMENTS

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.





SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

REVISION HISTORY

VERSION NO.	DATE DD/MM/YY	SUMMARY OF CHANGE
RDV1	21/06/13	Preliminary Release
RDV2	01/07/13	IR Power Pin
VS1	16/12/13	Updated text/diagrams



CONTENTS

1. Introduction	1
2. Applications	1
3. Package Contents	1
4. System Requirements	1
5. Features	2
6. Operation Controls and Functions	3
6.1 Front Panel.....	3
6.2 Rear Panel	4
6.3 IR Cable Pin Assignment	5
6.4 D-Sub 9-Pin Definitions	5
7. Connection Diagram	6
8. Specifications	7
8.1 Technical Specifications	7
8.2 CAT5e/6/7 Cable Specification	8
9. Acronyms	8





1. INTRODUCTION

The HDMI over HDMI and CAT5e/6/7 Splitter can split and distribute a single HDMI input and 2-way IR or RS-232 control to a single CAT5e/6/7 output and includes a simultaneous HDMI bypass output. It supports resolutions up to 1080p Full HD, 4K×2K timing, 3D and multi-channel digital audio formats (such as LPCM 7.1CH, Dolby TrueHD, Dolby Digital Plus and DTS-HD). The HDMI bypass output can be connected to a local HDMI display or cascaded to another splitter. The CAT5e/6/7 output can be connected to a CAT5e/6/7 to an HDMI receiver to extend the operating distance up to 60 meters.

2. APPLICATIONS

- Household entertainment sharing and control
- Lecture room display and control
- Showroom display and control
- Meeting room presentation and control
- Classroom display and control

3. PACKAGE CONTENTS

- 1×2 HDMI over HDMI and CAT5e/6/7 Splitter
- 1×IR Extender
- 1×IR Blaster
- 3.5mm Mini-jack to RS-232 Cable
- 24V DC Power Adaptor
- Operation Manual

4. SYSTEM REQUIREMENTS

- Source equipment with HDMI output connector
- Display TV/Monitor with HDMI input connector
- HDMI over CAT5e/6/7 Receivers with industry standard CAT5e/6/7 cables

5. FEATURES


- HDMI with 4K×2K resolution and 3D support, HDCP and DVI compliant
- Simultaneous HDMI and CAT5e/6/7 outputs
- Supports data rate from 250Mbps up to 3Gbps
- Supports a wide range of PC resolutions from VGA to WUXGA (RB) and HDTV resolutions up to 4K×2K (3840×2160@30 Hz and 4096×2160@24 Hz)
- Supports transmission of High Definition audio: LPCM 7.1CH, Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio (32 kHz~192 kHz sample rate)
- Supports distances up to 60 meters through CAT5e/6/7 cables
- Supports USB service port
- Supports control of devices via 2-way IR
- Supports RS-232 function
- 3D signal display is dependent on the TV/Display's EDID settings

Note:

1. *This system was tested with CAT6/23AWG cables, results may vary with cables of a different specification.*
2. *For playback of 4k×2k HDMI source signals, a 4K×2K capable display and High Speed HDMI cables are required.*

6. OPERATION CONTROLS AND FUNCTIONS

6.1 Front Panel

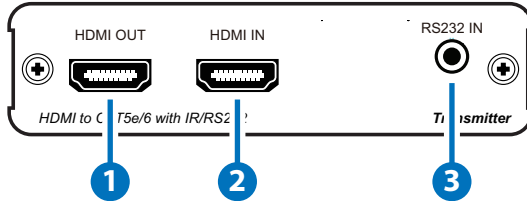


- 1 HDMI OUT:** Connect to a HDMI display for local monitoring of the HDMI signal or cascade to another Splitter.
- 2 HDMI IN:** Connect with source equipment such as DVD/Blu-ray player or games console.
- 3 RS-232 IN:** Connect to a PC/Laptop or RS-232 control device (with supplied 3.5mm Mini-jack to D-Sub 9-Pin adaptor) to transmit RS-232 data to a suitably equipped receiver unit.

Note: This device has a last memory function and will retain the EDID settings of the last device connected via the CAT5e/6 output port when it is not connected to a display after power cycling.



The splitter will read the EDID settings of the device connected to the HDMI output of the receiver unit and if it detects a 4K×2K capable EDID it will transmit the signal in that format to the output port. If no 4K×2K capable EDID is detected then the unit will detect the EDID settings and send out the signal that all outputs can accept.

6.2 Rear Panel

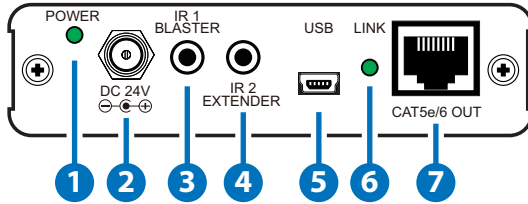

- 1 **POWER LED:** The LED will illuminate when connected to an active power supply.
- 2 **DC 24V:** Connect the 24V DC power supply to the unit and plug the adaptor into an AC outlet.
- 3 **IR 1 BLASTER:** Connect the supplied IR Blaster cable for IR signal transmission. IR signals received by an IR extender connected to the receiver unit will be transmitted by this blaster. Place the IR Blaster in direct line-of-sight of the equipment to be controlled.
- 4 **IR 2 EXTENDER:** Connect an IR extender cable for IR signal reception. Signals received will be transmitted from any IR blaster connected to the receiver unit. Ensure that the remote being used is within the direct line-of-sight of the IR Extender
- 5 **USB:** This slot is reserved for firmware update only.
- 6 **LINK LED:** This LED will illuminate when connected to a receiver unit that is connected with a TV/monitor that is displaying the signal.
- 7 **CAT5e/6/7 OUT:** Connect to a CAT5e/6/7 to HDMI Receiver (with or without PoE) with a single CAT5e/6/7 cable each to extend the HDMI signal up to 60m.


6.3 IR Cable Pin Assignment

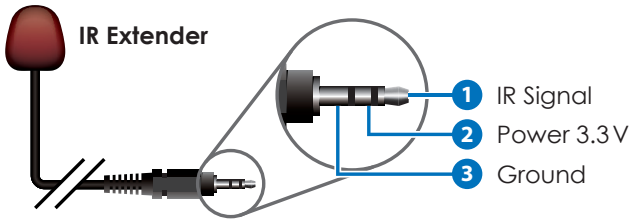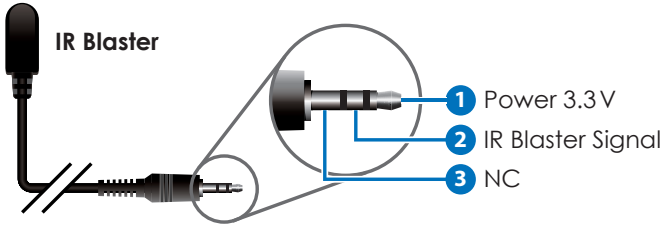

6.4 D-Sub 9-Pin Definitions

PIN	DEFINE TX/RX
1	N/C
2	TxD/RxD
3	RxD/TxD
4	NC
5	GND
6	NC
7	NC
8	NC
9	NC

7. CONNECTION DIAGRAM

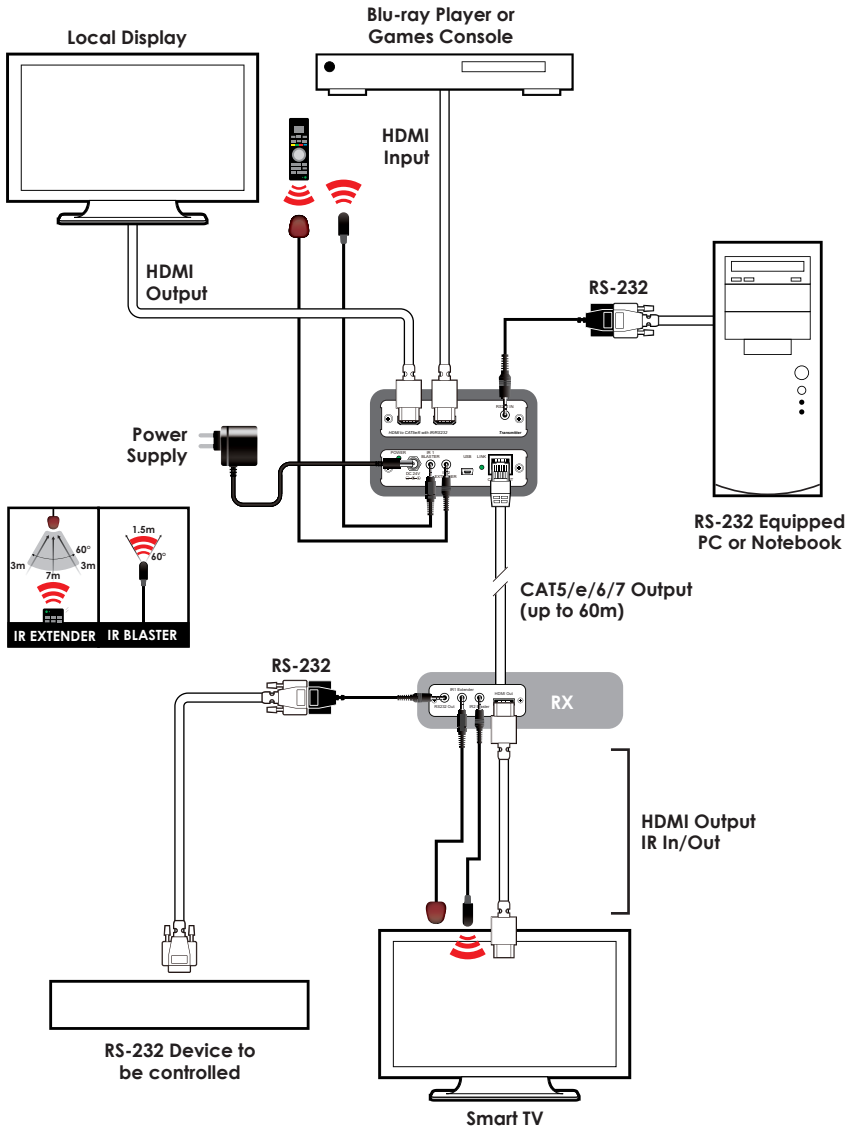



8. SPECIFICATIONS

8.1 Technical Specifications

Video Bandwidth	300Mbps/10.2Gbps
Input Ports	1×HDMI, 1×RS-232, 1×IR IN, 1×USB (Service only)
Output Ports	1×HDMI, 1×IR OUT, 1×CAT5e/6/7
HDMI Supported Resolutions	480i~1080p@50/60Hz, 1080p@24Hz, 4K×2K (3840×2160@30Hz/4096×2160@24/25Hz) & VGA~WUXGA (RB)
HDMI Input Cable Distance	10m (1080p@8/12-bit), 5m (4K×2K)
HDMI Output Cable Distance	15m (1080p@8-bit), 10m (1080p@12-bit), 10m (4K×2K)
IR Frequency	30~50kHz
Power Supply	24V/1.25A DC (US/EU standards, CE/FCC/UL certified)
Dimensions	102mm(W)×109mm(D)×25mm(H)
Weight	244g
Chassis Material	Metal
Color	Silver
ESD Protection	Human body model: ±8kV (air-gap discharge) ±4kV (contact discharge)
Operating Temperature	0 °C ~ 40 °C
Storage Temperature	-20 °C ~ 60 °C / -4 °F ~ 140 °F
Relative Humidity	20 ~ 90 % RH (non-condensing)
Power Consumption	6.3W

8.2 CAT5e/6/7 Cable Specification

CABLE TYPE	RANGE	PIXEL CLOCK RATE	VIDEO DATA RATE	SUPPORTED VIDEO
CAT5e/6/7	60 m	<=225 MHz	<=5.3 Gbps (HD Video)	Up to 1080p, 60 Hz, 36 bits, 3D (data rates lower than 5.3 Gbps or below 225MHz TMDS clock)
	40 m	>225 MHz	> 5.3 Gbps (Ultra HD Video)	4K×2K, 30Hz video formats

9. ACRONYMS

ACRONYM	COMPLETE TERM
4Kx2K	3840x2160 / 4096x2160
DTS	Digital Theater System
EDID	Extended Display Identification Data
HDCP	High-bandwidth Digital Content Protection
HDMI	High-Definition Multimedia Interface
HDTV	High-Definition Television



CYPRESS TECHNOLOGY CO., LTD

Home page: <http://www.cypress.com.tw>

20130531MPM-CHDBT-1H1CL