

Gefen

Power Rack 54

EXT-PS5-4R

User Manual



www.gefen.com

ASKING FOR ASSISTANCE

Technical Support:

Telephone (818) 772-9100
(800) 545-6900

Fax (818) 772-9120

Technical Support Hours:

8:00 AM to 5:00 PM Monday thru Friday.

Write To:

Gefen Inc.
c/o Customer Service
20600 Nordhoff St
Chatsworth, CA 91311

www.gefen.com
support@gefen.com

Notice

Gefen Inc. reserves the right to make changes in the hardware, packaging and any accompanying documentation without prior written notice.

Power Rack 54 is a trademark of Gefen Inc.

CONTENTS

- 1 Introduction**
- 2 Operation Notes**
- 3 Features**
- 4 Panel Layout**
- 5 Panel Descriptions**
- 6 Connecting And Operating The Power Rack 54**
- 7 Specifications**
- 8 Warranty**

INTRODUCTION

Congratulations on your purchase of the Power Rack 54. Your complete satisfaction is very important to us.

Gefen

Gefen delivers innovative, progressive computer and electronics add-on solutions that harness integration, extension, distribution and conversion technologies. Gefen's reliable, plug-and-play products supplement cross-platform computer systems, professional audio/video environments and HDTV systems of all sizes with hard-working solutions that are easy to implement and simple to operate.

The Gefen Power Rack 54

The Gefen Power Rack 54 is the perfect solution for cleaning up a messy rack space filled with individual power supply cables from several 5-Volt A/V devices. The Power Rack eliminates the need for multiple power supplies, centralizes power distribution, and saves space.

How It Works

The Gefen Power Rack 54 is rack mounted in a single 1U rack space near up to four 5V DC / 2.5A rated devices. The 24-Volt power supply of the Power Rack 54 is connected to a wall outlet or power strip and a red LED appears on the front panel, indicating successful power-on. 5-Volt power cables run from the rear of the Power Rack to the power input of each 5-Volt powered device.

On the front side of the Power Rack 54, there are 1 Power LED (red) and 4x Dual-State (green/red) LEDs, one for each power feed that is connected to an external device. A Green LED color indicates normal power output at 5V \pm 0.3V. If the output voltage of this feed is below or above this voltage range, the dual-state LED turns red to indicate an error condition.

Note: All power outputs have a grounding wire that is connected back to the Power Rack for maximum safety when powering external devices.

OPERATION NOTES

READ THESE NOTES BEFORE INSTALLING OR OPERATING THE POWER RACK 54

- The Power Rack 54 can supply power to up to four 5V Gefen products that do not exceed 2.5 amps/12.5 Watts (max).
- The LED indicators will indicate the status of each of the power outputs. A GREEN LED will indicate a good status. A RED LED will indicate an output fault. This will occur when the output voltage dips below or beyond 0.3V of the 5V norm.

FEATURES

Features


- Rack-mounted central power distribution eliminates multiple power supplies and messy cables
- Four individual 5V DC / 3A max. power outputs for powering external devices
- Four dual-state red/green LED lights indicate correct voltage range for each power output
- Locking connectors ensure secure attachment of output power cables
- Red LED indicates successful power status on the Power Rack 54
- RoHS Compliant -- Environmentally Safe Materials used in construction

Package Includes

- (1) Power Rack 54
- (4) 4-foot Power Output Cables (to provide power to 5V devices)
- (1) User's Manual
- (1) Set of Rack Ears

PANEL LAYOUT

Front Panel

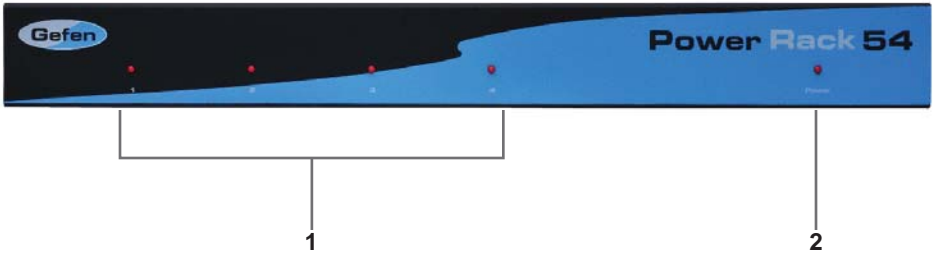

Back Panel



PANEL DESCRIPTIONS

1 Dual Color Status LED 1-4

Each LED will indicate the current status of the output voltage.

Green Voltage is within specification

Red Voltage is at least 0.3V above or below the 5V norm

2 Main Power LED

This LED will become active once the included 24V DC power supply has been properly connected and power is supplied.

3 24V DC Power Receptacle

The included 24V DC power supply will connect between this port and an open wall power socket. Only use the included power supply with this unit.

4 Power Output Receptacles 1-4

4 power supply ports are provided for use with 5V Gefen devices. 4 locking cables with locking connectors are provided.

CONNECTING AND OPERATING THE POWER RACK 54

How to Connect the Power Rack 54

1. Connect up to 4 power output cables (4 are included) to the Power Rack 54 unit.
2. Connect the opposite ends of the power output cables to compatible Gefen products.

NOTE: The amperage draw of each connected device must not exceed 2.5A.

3. Connect the included 24V DC power supply to the power receptacle on the Power Rack 54. Connect the power plug into an available power source.

How to Operate the Power Rack 54

No further configuration is necessary to operate the Power Rack 54.

SPECIFICATIONS

Power Input Voltage	24V / 3A power supply
Power Output Voltage	5V DC / 2.5A max. per output
Power Consumption	60 Watts (max.)
Power Outputs	Locking screw-down type, 1/4" dia.
Dimensions	17.1" W x 1.7" H x 4.25" D
Shipping Weight	6 lbs