




KT-7 Quick Start Guide

This guide helps you install and use your product for the first time. For more detailed information, go to <http://www.kramerav.com/downloads/KT-7> to download the latest QS (or scan the QR code) and check if firmware upgrades are available.

Step 1: Check what's in the box

- ✓ The KT-7 Touch Panel
- ✓ AC/DC adapter
- ✓ Tabletop Mount
- ✓ 1 Quick start guide

Step 2: Getting to know your KT-7

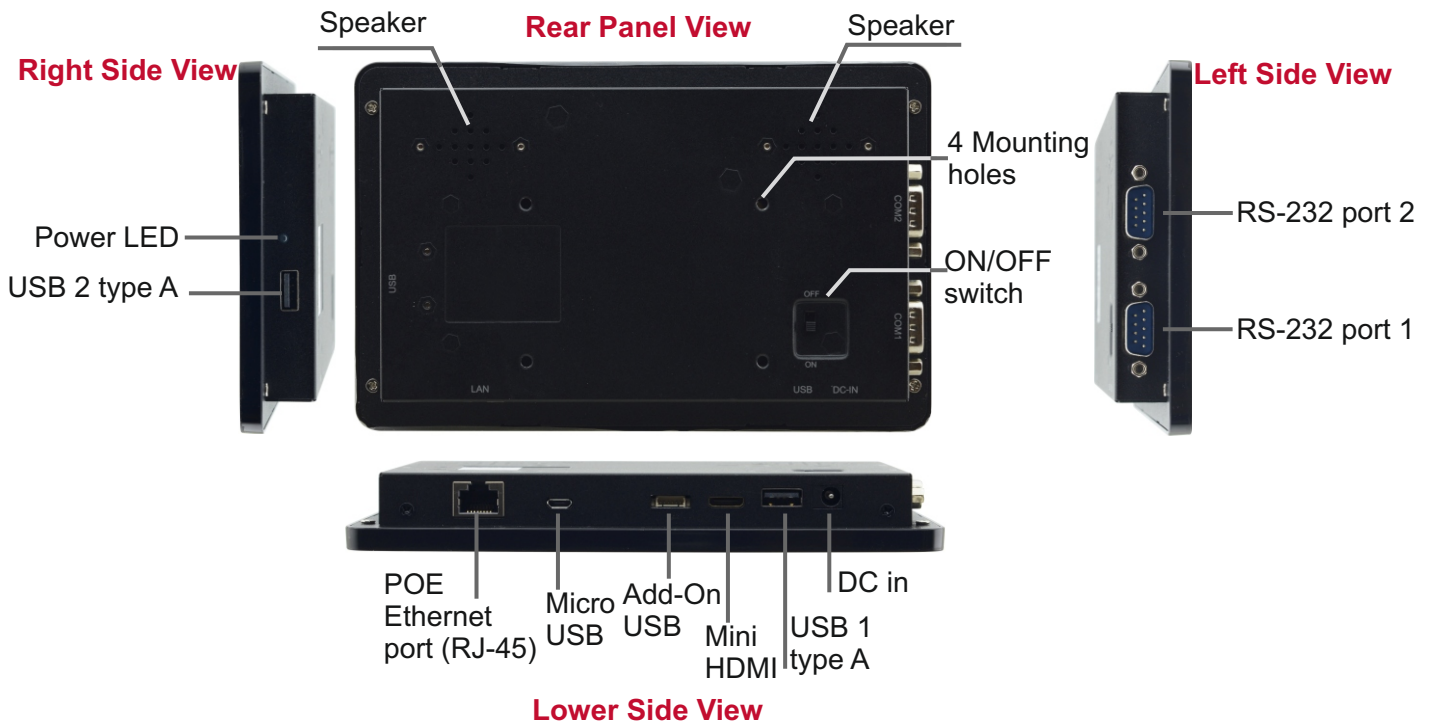

Step 3: Mounting on a table or podium

To fix the KT-7 to a table:

- Using 2 screws, attach the base of the touch panel to the table via the two mounting holes on the base of the tabletop mount.
- Set the tabletop mount to the desired angle.

To install the KT-7 in a podium:

- Unscrew the 4 screws attaching the tabletop mount to the touch panel and remove it.
- On the surface of the podium mark the place where you want to install the touch panel.
- Cut out a rectangle to fit the touch panel at the chosen location.

Kramer Electronics is not responsible for any damage caused to the podium.



Step 5: Operating the KT-7

To operate the **KT-7**:

1. Connect the 12V AC/DC power adapter to the **KT-7** DC IN power socket and to the mains electricity.
2. Turn the power switch on the rear panel of the touch panel to ON.
3. Double-click the desired icon (for example, K-Touch).



Specifications

PORTS:	2 bidirectional RS-232 ports (for future use) 2 USB 2.0 host type A 1 micro USB 2.0 (for connecting to a laptop) 1 add-on USB (for future use) 1 mini HDMI connector (for future use) 1 LAN on an RJ-45 connector
SPEAKERS:	2x1W
CPU PERFORMANCE:	Quad Core, 1.6GHz, GPU, 1GB RAM, 8GB Flash
MULTI TOUCH:	5 points
DISPLAY:	7" TFT LCD, 1024x600 RGB pixels, back-light
VIDEO FORMAT:	MKV, TS, FLV, AVI, VOB, MPG, DAT, ASF, RM, MOV, 3GP, MP4 and WMV
AUDIO FORMAT:	MP1, MP2, MP3, WMA, WAV, AAC, OGG, APE and FLAC
IMAGE FORMAT:	JPG, BMP, GIF, JPEG, PNG
ETHERNET PORT	10/100Mbps POE
WIRELESS COMMUNICATION:	Wi-Fi IEEE802.11b/g/n
CLOCK BATTERY:	Lithium-ion non-chargeable coin battery (for RTC)
CONTROLS:	Power switch (ON/OFF) and LED
POWER CONSUMPTION:	12V DC, 720mA
OPERATING TEMPERATURE:	0° to +40°C (32° to 104°F)
STORAGE TEMPERATURE:	-10° to +55°C (14° to 131°F)
HUMIDITY:	10% to 90%, RHL non-condensing
DIMENSIONS:	Touch panel: 18.8cm x 2.6cm x 12.0cm (7.4" x 1.02" x 4.72"), W, D, H Touch panel with tabletop mount: 18.8cm x 6.5cm x 12.0cm (7.4" x 2.56" x 4.72"), W, D, H
WEIGHT:	Touch panel: 0.5kg (1.1lbs) approx. Touch panel with tabletop mount: 0.73kg (1.6lbs) approx.
INCLUDED ACCESSORIES:	Power supply unit, tabletop mount (connected)