


ISOLDE AP108a Precision. Versatility. Power.



Short throw

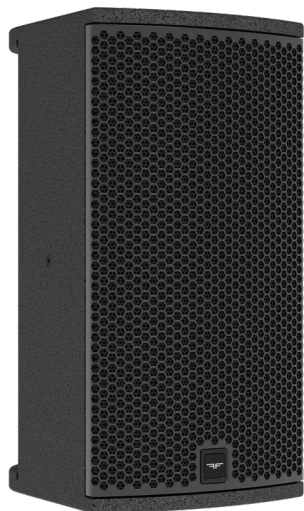

90° x 60°



55Hz to 20kHz

Isolde AP108a is a powerful, compact, self-powered point source loudspeaker with the versatility to excel in countless short throw live and installation scenarios. A premium 8" LF transducer incorporating Tetracoil technology ensures best-in-class SPL and massive headroom. The chosen neodymium magnet 1.4" exit throat / 2.4" voice coil HF transducer is from the same family as the drivers employed in our flagship touring series, sharing the same acclaimed intelligibility and audio signature across the range.

As a 2-way loudspeaker, Isolde outshines rival coax designs with superior control and directivity. This precision is augmented by a custom engineered, 3D printed horn concept, enforcing rigid control over the speaker's coverage pattern.

The ability to quickly rotate the horn through 90°, coupled with its unique cabinet shape, allows AP108a to do double duty as a compact wedge monitor. A range of wall, ceiling and pole mounting options underlines Isolde AP108a's readiness to perform wherever high SPL is needed in a small package.

Intuitive SCiO software enables remote control and monitoring of AP108a's integral amplifier from any device.

Isolde AP108a is made in Belgium using birch plywood for peerless rigidity and audio transparency.

Technical specifications

Description	2 way self-powered point source loudspeaker
Transducers	LF: 1 x 8" Tetracoil • HF: 1 x 1.4" exit compression driver / voice coil diameter 2.4"
Frequency range (-6dB)	55 Hz -20 kHz
SPL peak (1)	129dB
Processing	Dedicated AUDIOFOCUS presets
Rigging	Optional ceiling mount / vertical yoke / pole mount 0° and 5° tilt
Audio connectors	IN: 1x3-point XLR LINK: 1x3-point XLR
Network connectors	1 x etherCON for control
Power connectors	IN: 1x3-point powerCON TRUE1TOP LINK: 1x3-point powerCON
Watt AES/peak	LF : 350/1400 HF : 80/320
Dimensions (H x W x D)	260mm x 495mm x 250mm • 10.2 x 19.5 x 9.8 inches
Weight	12.5kg / 28lbs
Finish	Highly resistant polyurea coating
Cabinet	Top grade birch plywood

(1) Mtone 12 dB crest factor


Rigging accessories

Horizontal bracket




Flight case

Flightcase for 2x AP108

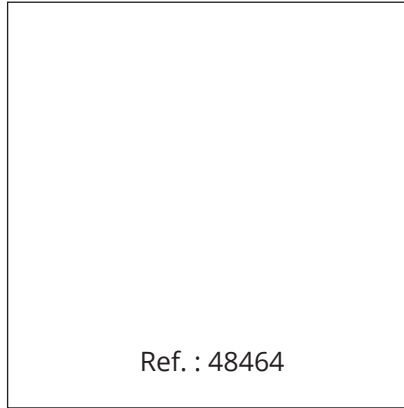

Protective cover

AP108 Protective cover

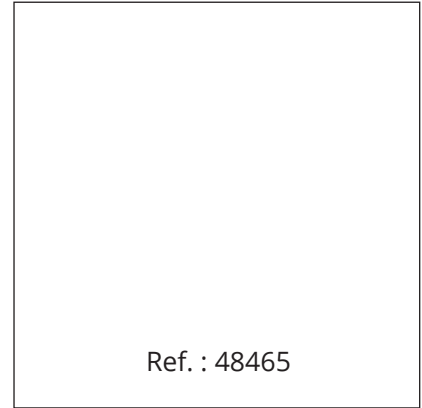

Subwoofers

118Sa

High-power active compact 18" subwoofer



Ref. : 48441

S18a


High-power active compact 18" subwoofer



Ref. : 48105

C210Sa

Low-profile 2x10" self-powered Subwoofer

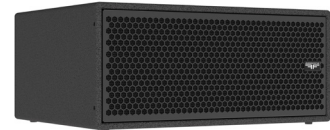

Ref. : 48310

Contact & Links

Need more information about our products ?


www.audiofocus.eu

info@audiofocus.eu

www.facebook.com/AudiofocusPage/

www.facebook.com/groups/AUDIOFOCUS/

Scan QR Code to view the ISOLDE AP108a product's web page.



Follow Us.

