

CARYS C15LS

Passive LF / Sub solution
for Carys column systems



CARYS C15LS is a passive LF / Sub extension for the CARYS C6 column loudspeaker.

A locking mechanism ensures stability and super-fast, plug 'n play setup.

A leading edge 15" neodymium LF transducer with Tetracoil technology allows C15LS to deliver high SPL and excellent efficiency. The LF / Sub features a naturally cardioid tuned vent, allowing it to be deployed discreetly close to walls and corners without sacrificing audio clarity.

C15LS can be powered by AUDIOFOCUS A Series rack amplifiers with dedicated SCIO presets. Powersoft Armonia presets are also available.

CARYS C15LS is built in Belgium by skilled craftspeople and state-of-the-art machinery before being coated in tough, weather-resistant polyurea to safeguard your investment.



40Hz - 90Hz



Cardioid



Complete
Solution with
CARYS C6

Technical specifications

Description	COMBINED LF / SUB SPEAKER
Transducers	LF: 1 x 15"
Frequency range (-6dB)	40Hz - 90Hz
SPL peak (1)	137dB preliminary
Processing	Dedicated AUDIOFOCUS SCIO and Armonia/Powersoft presets
Rigging	Locking connector for a Carys C6 Column
Connectors	2 x 4-point speakON + link thru NL4 for column output
Nominal Impedance	8 Ohm
Watt AES/peak	900W/3600W
Dimensions (H x W x D)	912 x 410 x 500mm 35.91 x 16.14 x 19.69 inches
Weight	35kg / 77lbs
Finish	Highly resistant polyurea coating
Cabinet	High grade birch plywood

(1) Peak level measured at 1m half space compression limit of 3dB using multi-tone

Top


CARYS C6
high-performance column
loudspeaker



Frequency range : 80 Hz- 20 kHz
SPL max : 135.5dB preliminary
Ref. : 48212

Beamwidth

CARYS C15LS beamwidth

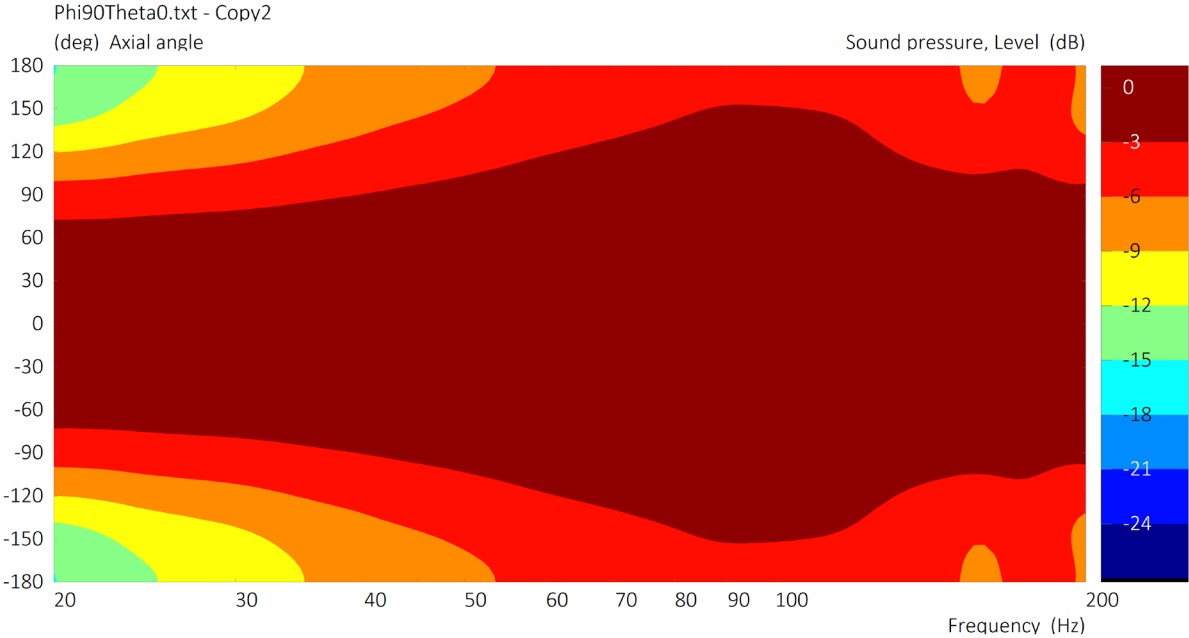

Contact & Links

Need more information about our products ?

www.audiofocus.eu

info@audiofocus.eu

www.facebook.com/AudiofocusPage/

www.facebook.com/groups/AUDIOFOCUS/

Scan QR Code to view the CARYS C15LS product's web page.



Follow Us.

