
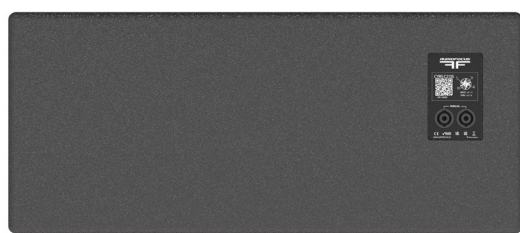


C210S Low-profile 2x10" Sub.

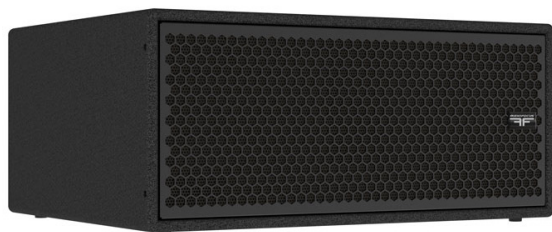

C210S is a passive, dual-vented bandpass subwoofer, housing a pair of high specification 10" neodymium LF transducers and employing Tetracoil technology for high SPL and superb efficiency. With its low-profile design, C210S is a discreet yet powerful option for stylish hospitality and leisure installations as well as corporate AV and live events.

For optimal performance, we recommend using AUDIOFOCUS A-Series amplifiers and dedicated presets with C210S. Powersoft Armonia presets are also available.

C210S is built in Belgium by skilled craftspeople and state-of-the-art machinery before being coated in tough, weather-resistant polyurea to safeguard your investment.



Complete solution with CX 6



32Hz to 125Hz




SCiO Presets

Technical specifications

Description	Low-profile installation subwoofer
Transducers	LF : 2 x 10" Tetracoil
Frequency range (-6dB)	32Hz-125Hz
SPL peak (1)	126.5 dB
Processing	Dedicated AUDIOFOCUS A-series SCiO presets and Powersoft Armonia presets
Input Connectors	2 x 4-point speakON
Nominal impedance	8 Ohm
Watt AES/peak	700W/2800W
Dimensions (H x W x D)	282 x 640 x 500 mm • 11.1 x 25.2 x 19.7 inches
Weight	23,2kg / 50.71lbs
Finish	Highly resistant polyurea coating
Cabinet	High grade birch plywood

Dimensions

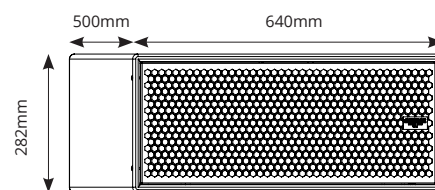

(1) Peak level measured at 1 m under free field conditions using pink noise with crest factor 5. CEA2010 Max SPL.

Related speakers

CYRIS CX6


2-way passive full-range point source.



Ref. : 48309

VENU 8x

2-way 8" passive point source loudspeaker



Ref. : 48093

VENU 8ix

Installation 2-way 8" passive point source loudspeaker



Ref. : 48122

Contact & Links

Need more information about our products ?

www.audiofocus.eu

info@audiofocus.eu

www.facebook.com/AudiofocusPage/

www.facebook.com/groups/AUDIOFOCUS/

Scan QR Code to view the C210S product's web page.



Follow Us.

