Launching New Product

DisplayPort 1.2 Extra Copper Extension Fiber Optic Extender **DPFX-700-T**R



New Experience Innovation Never Ends



DPFX-700-TR What is New?

2m Copper Extension

- ✓ Less space needed for the connection to the ports
- ✓ Chances for heating issue with adjacent installation avoided

Interoperable with DPFX-300

- ✓ Users can choose their desired type of connection
- ✓ TX/RX can be provided separately based on needs



Installation Support

- ✓ Simplify installation with multiple extenders by a rack
- ✓ Provided adhesive tape allows attachment on any surfaces

DPFX-700-TR

DisplayPort 1.2 One Fiber Optic Extender


Resolution Capability	4K (4096x2160) @60Hz RGB 4:4:4
Transmission Distance	200m (656 ft)
Fiber Classification	One (1) LC multi-mode OM3 Fiber
Total Date Rate	21.6Gbps (5.4Gbps per lane)
Connection Merit	2m copper extension on each side
Mini USB Port	Firmware Update
Operating Temperature	0°C- 50°C: Dual Layer Design
External Power Option	5V/1A DC Power Supply
Dimension	39mm x 76mm x 20mm (LWH)



DPFX-300-TR

Direct Connection TypeConnection MeritExternal Power SupplyMini USB Port22mm x 67mm x 14mm (LWH)Dimension



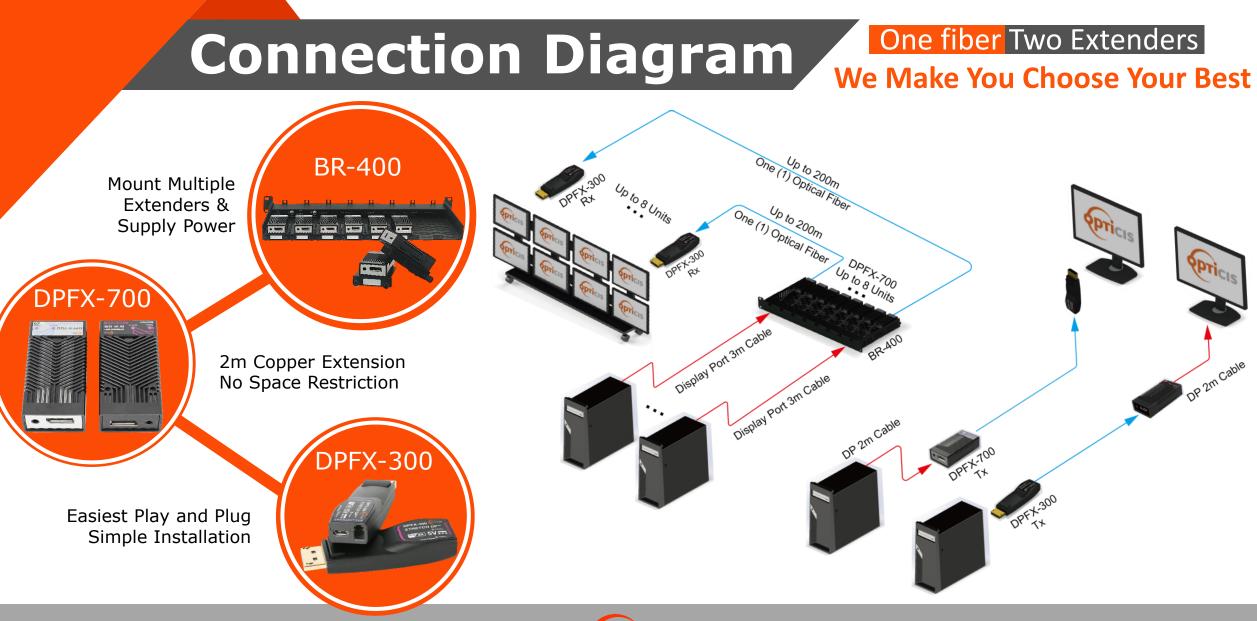

ορτίςις

Power Rack

1RU Rack Size Power Supply Frame

Secondary power adapter available Medical power adapter available Compact 19" 1RU Power Supply Frame Power Supply: 100-240VAC, 50-60Hz Adopts up to 8 units of Transmitters Extends up to 3 m (9.84ft) Supports Load-sharing

DPFX-700-TX BR-400

THANK YOU!



www.opticis.com tosales@opticis.com \bowtie R +82-31-719-8033

3F, 305, Sanseong-daero Sujeong-gu, Seongnam-si Gyeonggi-do, 13354, KR

