

DXP DP0102




Key Features

- 1 DisplayPort in, 2 DisplayPort out
- Serializable to increase numbers of display
- Output resolution up to 3840x2160@60


Specification

Connectors	Input	1xDisplayPort	
	Output	2xDisplayPort	
Performance	Input Resolution	DisplayPort SMPTE	720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 2160p@60
		VESA	800x600@60 1024x768@60 1280x768@60 1280x1024@60 1366x768@60 1600x1200@60 1920x1080@60 2048x1152@60 2560x1600@60 3840x1080@60 3840x2160@60
	Output Resolution	DisplayPort SMPTE	720p@50/60 1080p@50/60 2160p@60
		VESA	1024x768@60 1280x768@60 1280x1024@60 1366x768@60 1600x1200@60 1920x1080@60 2048x1152@60 2560x1600@60 3840x1080@60 3840x2160@60
	Supported Standard	DisplayPort 1.2	
Power	Input Voltage	5V DC	
Enviroment	Temperature	0℃~55℃	
	Humidity	10%~95%	
Physical	Weight	0.5kg	
	Dimension	231mmx98mmx26mm	

Application

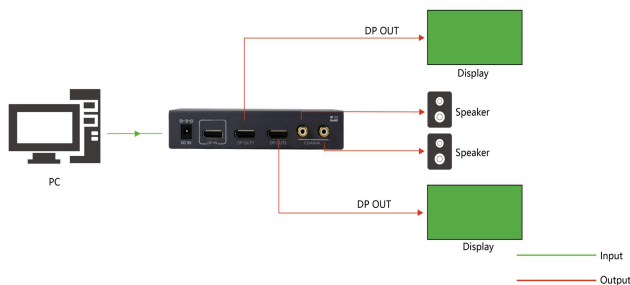

Dimension

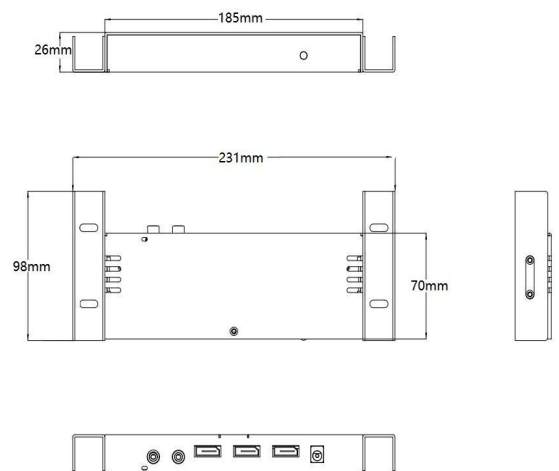

Order Codes

Product Code	Item
621-3102-01-0	DXP DP0102

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink®
www.rgblink.com

