

EDC-2000 series Basic Conference System



Easily Meet the Basic Needs of a Meeting



EDC-2000 Features

- Easy-to-use
- Excellent Audio Quality
- Stable and Reliable
- Simple and Elegant Design

EDC-2051 Conference Main Control Unit

Quick installation, Easy maintenance

CAT-5E connection with parallel or series mode. Even one of the microphones is failed of connection, others can still work as normal.

4 x 20 digit LCD display

Show conference modes, ID of the operating microphones, mic volume and other configurations.

Multiple operating modes

Open-mic (activates max. of 9 microphones at the same time) / Chairman / Override

Ideal for small to medium meeting room

Support Max. of 265 microphone units (Delegate x 255 + Chairman x 10)

Microphone auto-off

Microphones can turn off automatically after 30/45 seconds not receiving speaker's voice.

Microphone auto-scanning


Ensures the status of each microphone before meeting



Closer to EDC-2051 Rear Panel

RS-232: connects with BXB HDS-720 IP Network AV Controller, camera, and other environmental control equipment for system integration

XLR plug: enables the connection with other recording and audio equipment

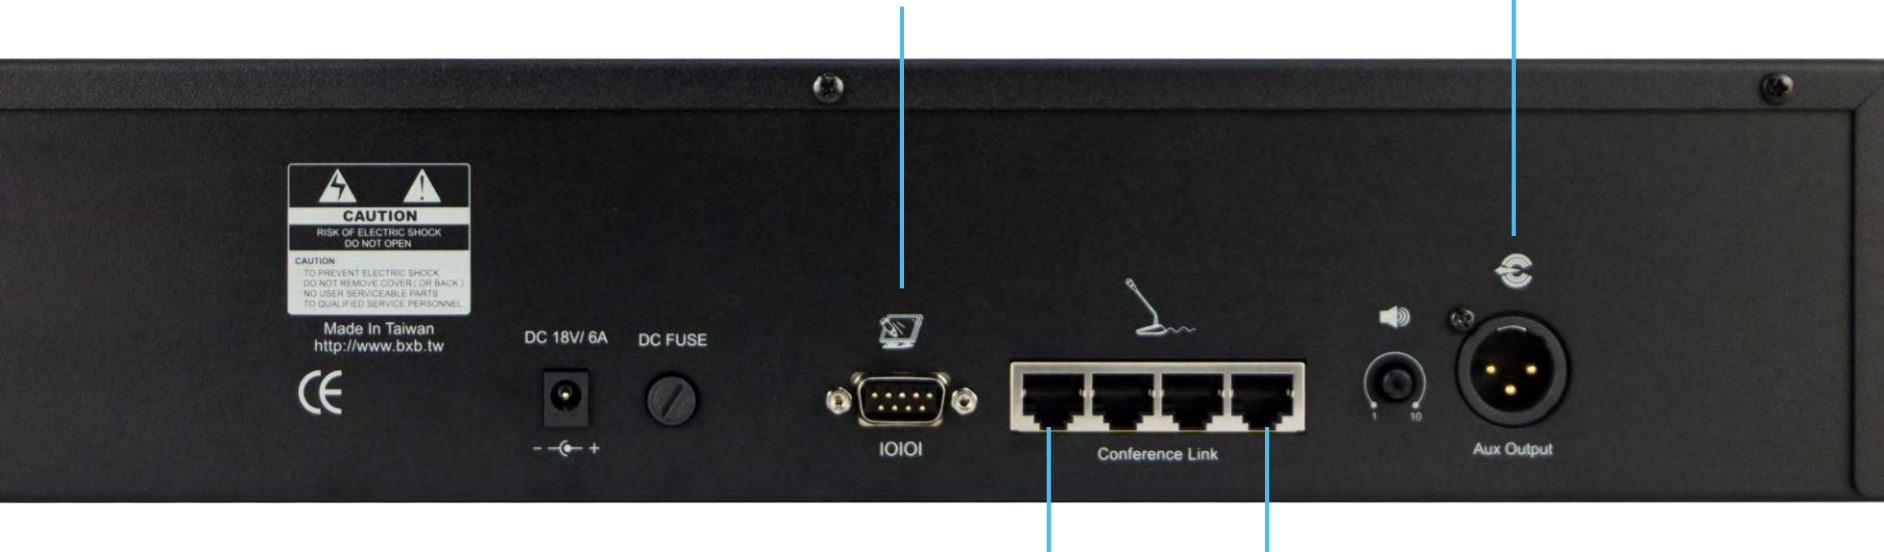

RJ45 ports: one port for 15 microphone units; the total is 50 units. Via BXB extension power supply, it enables the max. of 265-unit connection

EDC-2011/2012



Solid & Simple Unit Design

Made by extruded aluminum with anti-skid pads beneath.

Built-in 2.5" HI FI Speaker

As the microphone is being activated, the HI FI speaker would be auto-mute to avoid sound feedback.

Functional Plugs on the Unit

Built-in recording plug and headphone output to easily reserve meeting minutes; volume is adjustable.

Random Setting of Chairman Unit

You can put the chairman units at any position and with random sequence based on the meeting demand.

Human-centered Design of Gooseneck Mic

Pluggable gooseneck microphone with shield and flexible tube for easy installation (length provided: 43/48/56/70cm). It's also designed with red indicator ring to show the speaking status.


Design Concept of EDC-2011/2012

Home symbolizes "stabilization" and "warmness". Thus, we apply the shape of **inclined roof** to the unit design.

We wish to create a harmonious atmosphere for every conference room installed BXB's system.



System Diagram

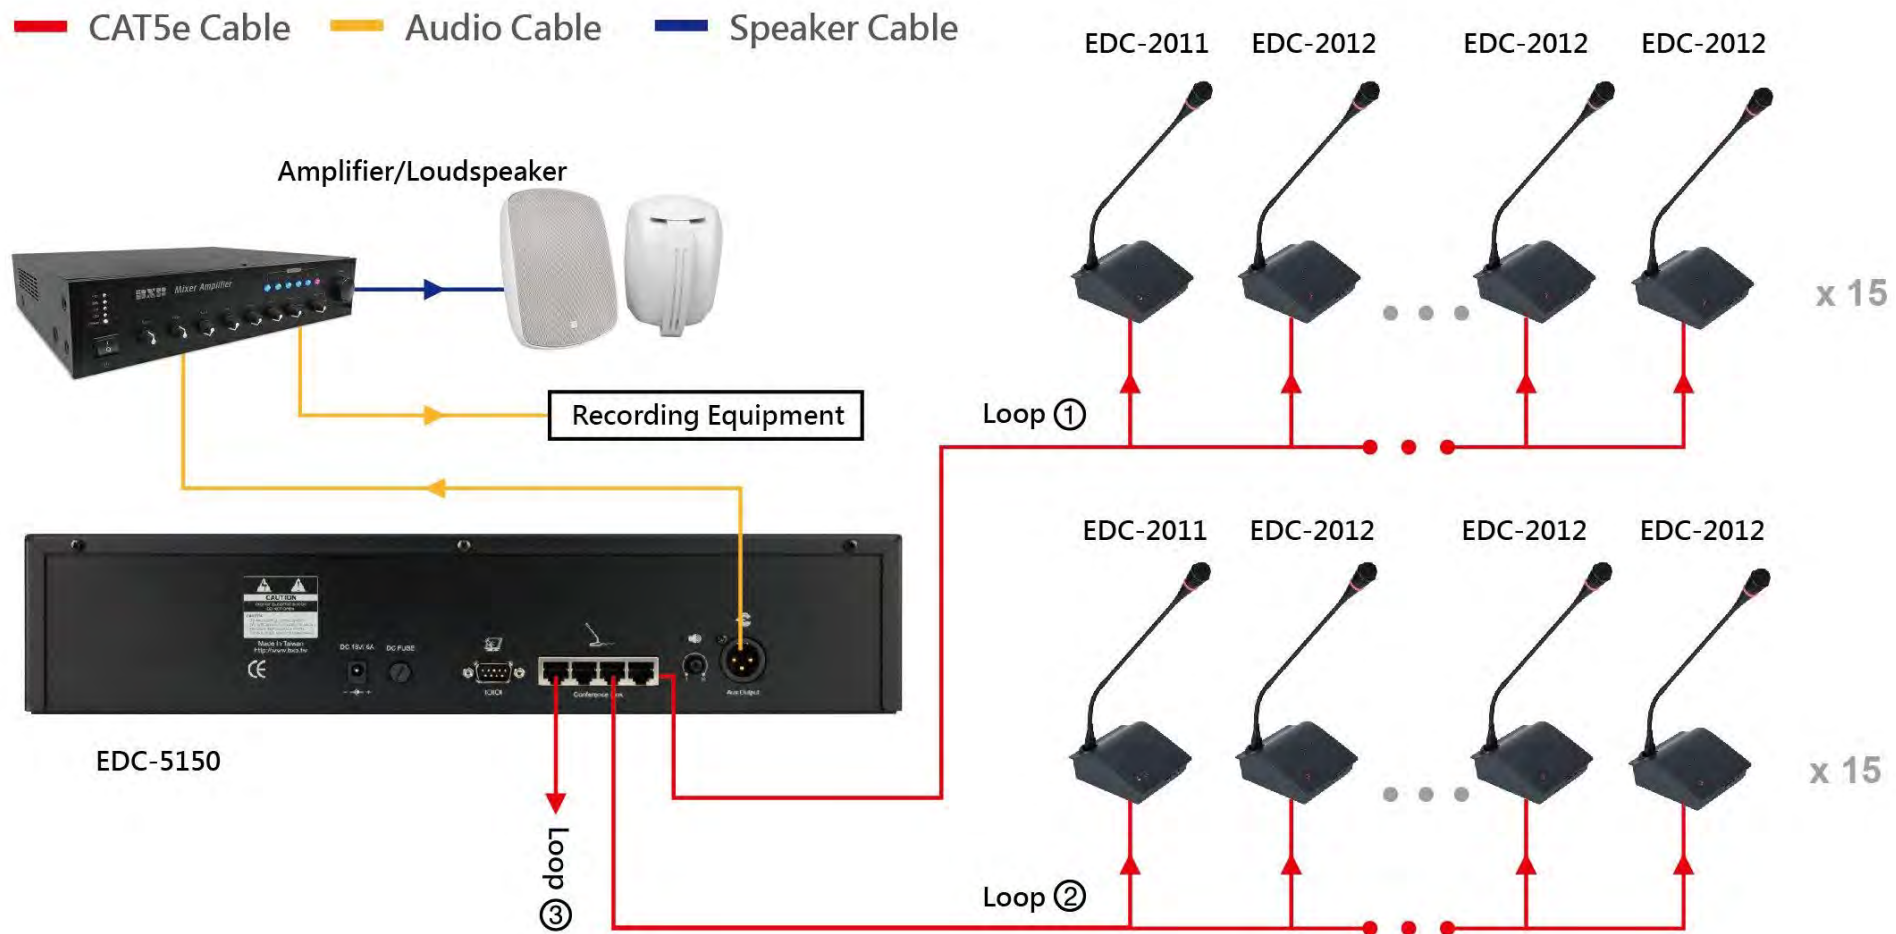

Applications



China Development Bank




Rajamangala University of Technology Phra
Nakhon, Thailand



Gulf Royal Palace, Saudi Arabia



Taipei American School, Taiwan

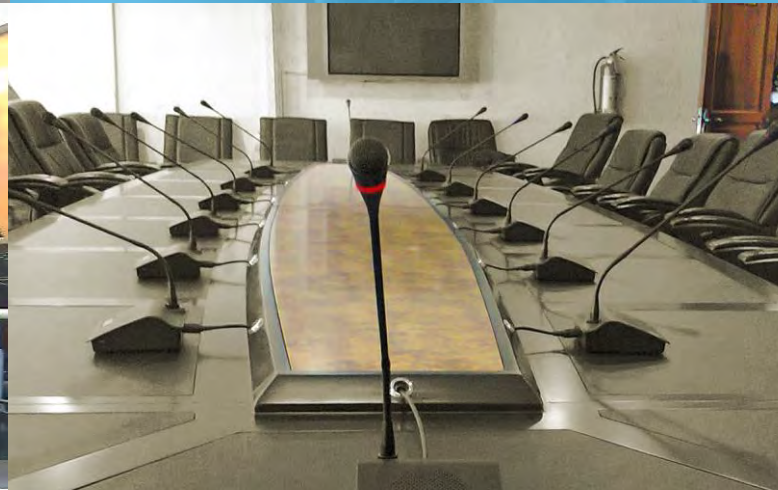

Murtala Muhammed International Airport,
Nigeria



Kyongnam Bank, South Korea

Applications



The Ministry of Education, Saudi Arabia



Yu Da University of Science and Technology,
Taiwan



Vietnam 4th Region Audit Dept.



Bulgaria Government



The State Agency for Geology and Mineral
Resources, Kyrgyz Republic



Shijiazhuang University, China



www.bxb.tw



Youtube



Facebook