

# ETH232AD

## TCP/IP-SERIAL CONVERTER



#### **PRODUCT OVERVIEW**

Ecler ETH232AD is a serial interface that allows bidirectional transparent transmission between RS-232/422/485 and Ethernet. It includes a setting webpage for Ethernet and Serial customized settings. Along with ENM software, it represents a very versatile and cost effective serial interface controlled by customized user panels (UCP).

## **KEY FEATURES**

- ♦ 3-in-1 RS-232/422/485 interface with 10/100 Mbps Ethernet port
- ♦ Supports 4- and 2-wire RS-422 with built-in terminator
- ♦ Supports 12-24 VDC power input
- ♦ Euroblock connections for RS-422/485 and DB-9 connections for RS-232
- ♦ Supports configuration via web browser
- ◆ Supports configuration store and copy for easy deployment
- ♦ Supports TCP Server/Client, UDP Server/Client operation modes
- ♦ CE, FCC, RoHS

### **APPLICATIONS**

- Retail
- Hospitality
- Education
- Corporate
- Sports & Wellness
- Domotic Systems
- Smart buildings




## **TECHNICAL SPECIFICATIONS**


| Serial  |   |
|---|---|
| Interface Type  | RS-232<br>RS-485/422  |
| Data Rate   | RS-232: 1200 - 115200 Kbps<br>RS-485/422: 1200 - 921600 Kbps  |
| Data Length   | 5.6.7.8 bits  |
| Parity  | Odd, Even, None   |
| Stop Bits   | 1-2bits   |
| Flow Control  | None<br>Software: Xon/Xoff,<br>Hardware: RTS/CTS  |
| Connectors  | RS-232 DB-9 Male<br>RS-485 6-pin Euroblock  |
| Network Interface   |   |
| Interface type  | Ethernet 10/100Mbps (Auto-Sensing)  |
| System Connector  | 8-pin RJ -45  |
| CPU   | Embedding RISC CPU 100Mhz   |
| Memory  | 32KB SRAM.512KB Flash memory  |
| Software  | JANU SIMM. STAND Hash Helifold  |
| Network Protocols   | TCP, UDP, DHCP Client, HTTP Server, DNS Client. Telnet  |
| Configure Options LED Indicators                              | Web page  |
| Link  | 10/100Base-TX Link & Activity Indicator   |
| TXD<br>RXD  | Data Transmitting from Eth to Serial<br>Indicator   |
| PWR   | Data Receiving from Serial to Eth indicator   |
|   | Power ON Indicator  |
| Supply  | TOWER ON MUICEROI   |
| DC Supply   | 9-24VDC   |
| Power Supply  Mains (using supplied DC adapter)  Enviromental | 9VDC 1A<br>100-240AC 50-60Hz  |
| Operating Temperature   | -25 ~ 70°C (-13 ~ 158°F)  |
| Storage Temperature   | -40 ~ 85°C (-40 ~ 185°F)  |
| Ambient Humidity  | 5% to 95%(non-condensina)   |
| Mechanical  |   |
| Dimensions (WxHxD)<br>Weight                                  | Without ears: $100 \times 67 \times 26$ mm (3.94" $\times$ 2.64" $\times$ 1.02")<br>With ears: $100 \times 86 \times 26$ mm (3.94" $\times$ 3.39" $\times$ 1.02")<br>0.5kg / 1.10 lb. |




### **MECHANICAL DIAGRAM**

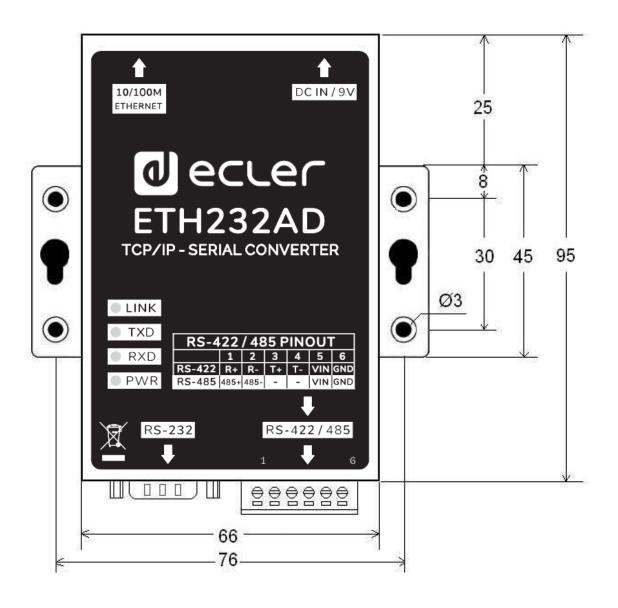



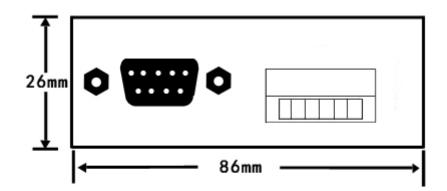

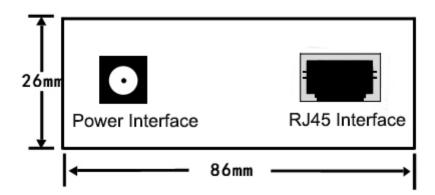



All product characteristics are subject to variation due to production tolerances. **NEEC AUDIO BARCELONA S.L.** reserves the right to make changes or improvements in the design or manufacturing that may affect these product specifications.

Motors, 166-168 08038 Barcelona - Spain - (+34) 932238403 | information@ecler.com | www.ecler.com