



HSP 2

Quick Guide
 Kurzanleitung
 Guide de démarrage rapide
 Guía rápida
 Instrucciones resumidas
 Instruções resumidas
 Beknopte gebruiksaanwijzing
 Krótka instrukcja obsługi
 Snabbguide

Kort vejledning
 Pikaohje
 Σύντομες οδηγίες
 Kisa Kilavuz
 Краткая инструкция
 快速指南
 快速使用指南
 クイックガイド
 요약 안내서

SENNHEISER



Sennheiser electronic GmbH & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

Printed in Germany, Publ. 12/20, 587440 /A01

In the box




3.5 mm jack plug

or



3-Pin connector

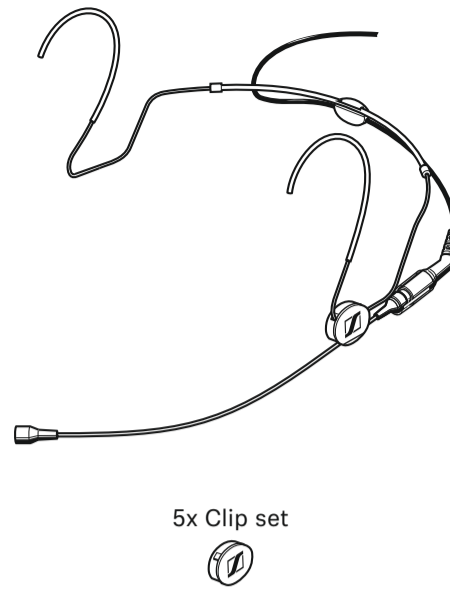

5x Clip set


Frequency caps



MZC 2-1 MZC 2-2



Setup

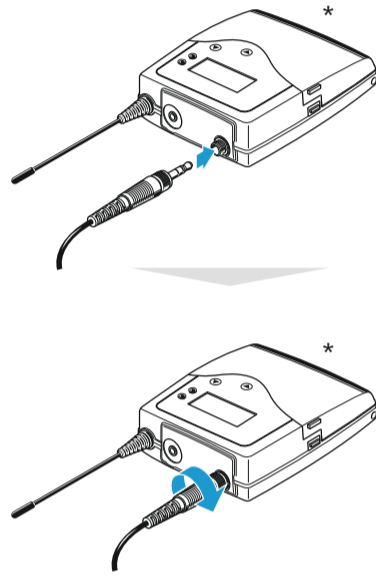

*optional accessories

Frequency cap

short cap:
MZC 2-1



+ 2 dB

long cap:
MZC 2-2



+ 4 dB

or

Accessory




Windshields

MZW 2*



- 20 dB
MZW 2*

MZW 02*




- 30 dB
MZW 2* + MZW 02*


*optional accessories

Setup


1

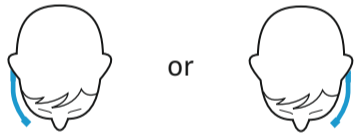


2




3




4

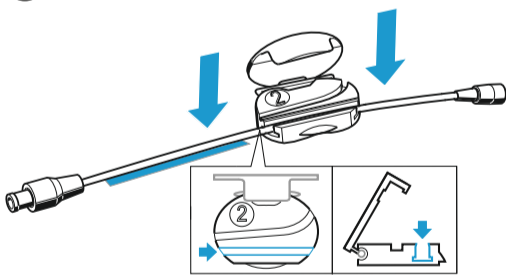


5

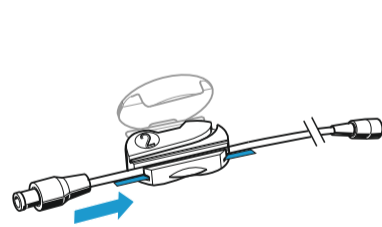




6

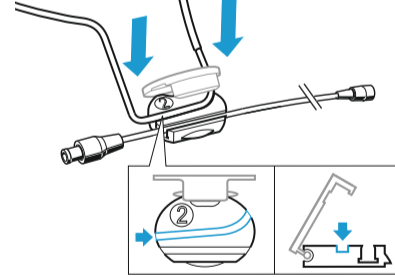

7

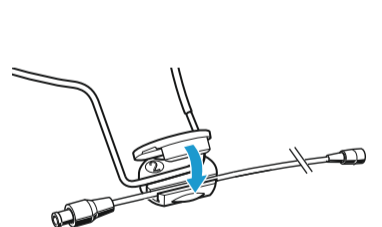


Use

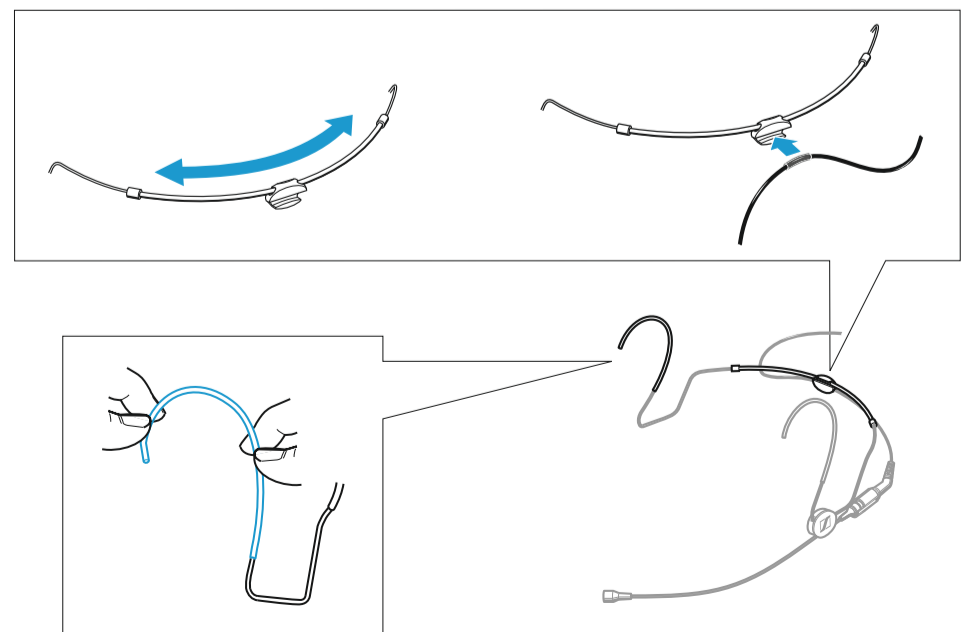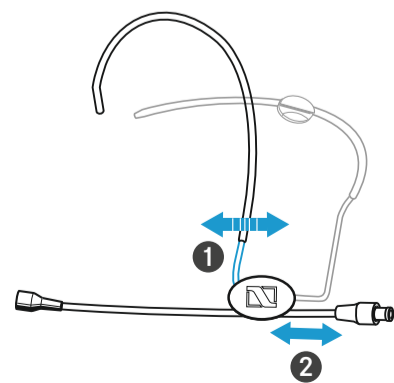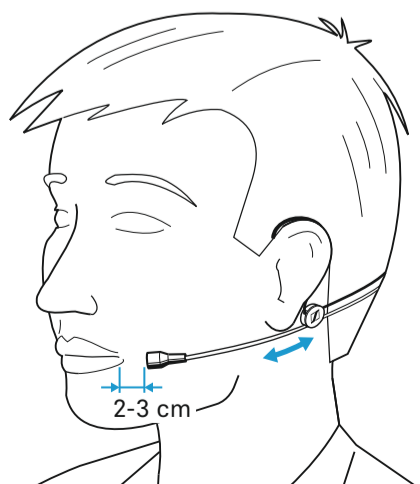


Cleaning




1





2




3



4

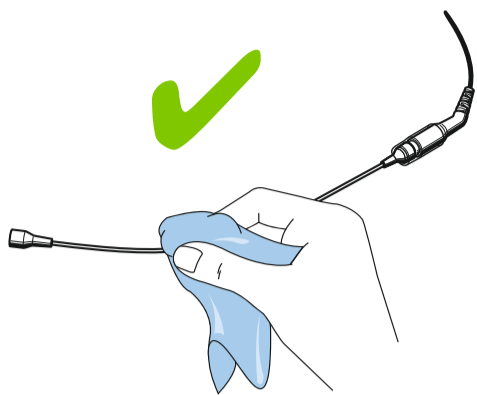

Polar pattern

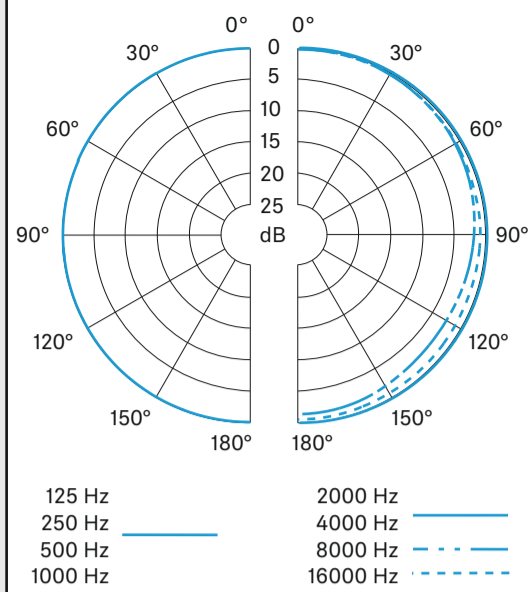

Specifications

Frequency response	20 - 20,000 Hz ±3 dB
Pick-up pattern	omni-directional
Nominal impedance	1 kΩ
Min. terminating impedance	4.7 kΩ
Sensitivity	2 mV/Pa ±3 dB
Diameter of mic capsule	4.8 mm
Max. sound pressure level	150 dB
Equivalent noise level	28 dB(A)
Supply current	approx. 250 μA
Power supply	4.5 - 15 V
Temperature range	-10 °C to +50 °C
Cable length	1.6 m
Diameter of boom arm	1.1 mm
Weight	2.1 g
Connector	3.5 mm jack plug or 3-Pin connector

Neckband

Width	110 mm
Weight	4.4 g

Frequency response

