

---

**Qtex Architectural Module Series**  
**LDA-17102M-BK Monitor Lift Datasheet**



**Overview:**

**LDA-17102M-BK - Lift for LCD monitors with a diagonal measurement of 17" is designed for flush-mounted display in the conference room tables, furniture or other structures. Main advantage of this system is when the Monitor opened it will not block users view. The top panel of the module is made of aluminum alloy, black. Modern design is suitable for office or conference halls use. The panel is equipped with power indication and buttons for local control: up, down, stop. Lift control can be organized locally by the top panel buttons or remotely using a separately supplied radio remote control or via RS-485 interface.**

---

# **LDA-17102M-BK Monitor Lift Datasheet**

## **Key features:**

- **Allows you to set the hidden LCD monitors up to 17 "in the conference room tables, furniture or other structures**
- **Supports monitors with VGA or DVI-D connection interface**
- **Native Display resolution 1280x1024**
- **Monitor face down rotation. Flip angle: 0-120°**
- **Shielding technology for the screen line: anti-signal/ anti-magnetic disturbance; protect human body from radiation; environmental protection**
- **Special protection for all used cable lines: double insulated and anti creep**
- **Micro-motors inside: low heat and noise, stable performance and durable**
- **Hand-protect function**
- **Elevator control can be organized locally by pressing the top panel or remotely via radio remote control or RS-485 interface**
- **Perfect for covert installation of screens in the training or conference rooms, the top panel is made of aluminum, painted black**
- **Housing elevator is made of perforated sheet metal, provides reliable protection of internal components from damage**
- **Optional: touch screen, HDMI interface**

## **Specifications:**

**Inputs 1 - DVI, jack DVI-I 29 (male), cable 1.8m**

**1 - VGA, jack D-sub HD15 (female)**

**1 - RS-485 connector D-sub D9 (male)**

**Outputs 1 – pass-through RS-485 connector D-sub D9 (male)**

**The flip angle 0 – 120 °**

**Electric power 15 W**

**Operating temperature range 5 - 40 ° C**

**Storage temperature range -20 - 60 ° C**

**Relative humidity 20 - 80% (no condensation)**


**Indication of power applied**

**Voltage AC 220 V, 50/60Hz**

# LDA-17102M-BK Monitor Lift Datasheet

## Monitor Box Size

PANEL SIZE (MM)		BOX SIZE(MM)
L1xW1xH1	R1	L2xW2xH2
485x405x6.0	8	468x388x145

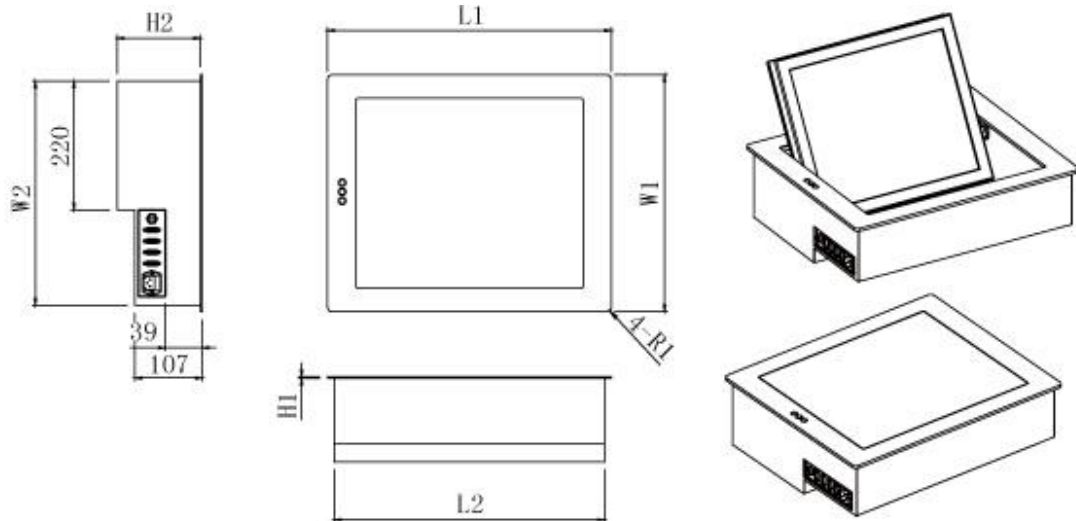

## Monitor Cut-out Size

TABLE CUT-OUT SIZE (MM)		
L3xW3xH3	R2	L4xW4
487x407x6.0	9	472x392

