


**SPEAKER CABLE  
LS07HF**

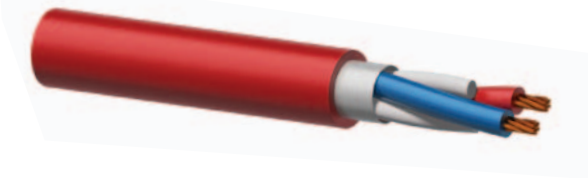

Speaker Cable

OUTER DIAMETER

Ø 7 mm

APPLICATIONS

Indoor and outdoor, fixed and mobile installation, low smoke and halogen free cable

INNER CONDUCTOR



A high quality and flexible double isolated low smoke halogen free loudspeaker cable. This kind of speaker cable is suitable for use in indoor and outdoor applications. Each conductor has a section of 0,75 mm<sup>2</sup> and is fitted with a highly flexible jacket made of Polyolefin. Both conductors are twisted with two cotton cords, which ensures the great strength and flexibility of the cable. The two wires, together with the cords, are packed with a plastic foil and a general Polyolefin jacket with an outer diameter of 7 mm. These cables have been designed for connection of loudspeakers in fixed or mobile sound systems.


Type of cable	Speaker cable
Inner conductor	BC 7 x 10 x 0,12 mm
Inner conductor section	0,75 mm <sup>2</sup>
Isolation	PVC Ø 2,5 mm
Isolation colour	Red / Blue
Number of conductors	2
Conductor twisting	Yes
Filling	Cotton yarn
Separator	Cotton paper
Outer jacket	Polyolefin
Outer jacket colour	Dark red
Outer jacket dimensions	Ø 7 mm
Lead resistance - 100 meter	2,2 Ohm
Cable crosstalk - 100 meter	Min 64 dB
Cap. Lead to lead - meter @ 1 kHz	83 pF
American Wire Gauge	26 AWG

**MECHANICAL SPECIFICATIONS**

Temperature range	fixed installation	-40° C till +80° C
	flexible installation	-25° C till +70° C
Bending radius	fixed installation	8 x outer diameter
	flexible installation	10 x outer diameter



Available Lengths:  
100 m plastic reel



LSHF BULK CABLES