



M1-1P0 DVI - HDCP Extension Cable

Stretch your Digital Visual Interface Experience

Description

The Digital Visual Interface is a low cost, high quality graphics interface between a host processor video card and a display panel. Optical technology for this transmission stretches the performance beyond the limitations of copper wire with longer length, data security, negligible RFI/EMI and the elimination of costly analog distribution systems.

The M1-1P0 consists of a transmitter and a receiver, connected by bundled H-PCF (Hard-Polymer Clad Fiber) jacketed fibers with male DVI-D connectors at each end. The Transmitter and Receiver connectors respectively have Opticis designed and manufactured 850nm VCSEL and PIN-PD arrays.

The M1-1P0 product offers DDC/HDCP interconnection and power management over copper wire with the R,G,B,Clk TMDS graphic data over four H-PCF fibers. The cable can be any length up to 100m (326feet).


No external power is required as most video cards provide at least 500mA of +5V voltage to the cable.

Features

- ◆ Supports all VESA resolutions up to WUXGA (1920x1200), at 60Hz refresh rate with 1 pixel/clock mode.
- ◆ Hybrid cable with four H-PCF fibers cables for the TMDS video interface and embedded copper wires to support the DDC2B/HDCP, Hot Plug Detect and power management.
- ◆ Extends up to 100 meters (326 feet).
- ◆ Compact end connector design easily allows direct connect to the host video card and display peripheral.
- ◆ No software to install; Plug and Play.
- ◆ Data security with negligible RFI/EMI emissions.

Applications

- ◆ Digital display system integration for medical, military, aerospace, factory automation, and traffic control platforms.
- ◆ Digital FPD, PDP and projector installation in conference rooms, auditoriums and for kiosk systems
- ◆ LED signboards for large scale information display and stadiums
- ◆ Home Theatre Systems

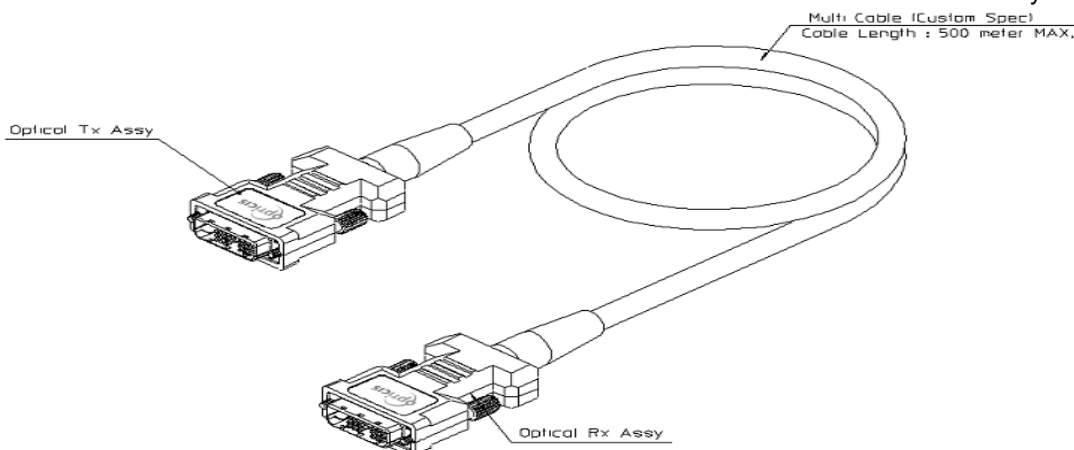


Optical DVI Cable (M1-1P0)

Factory Options for the H-PCF Cable

M1-1P0E uses an external AC/DC adapter to enable the supply of +5V to the transmitter and receiver modules where the +5V host power is judged to be inadequate or non-existent. If the video card can provide 500mA of +5V to pin 14, this option is unnecessary.

Custom Lengths 10m, 20m, 30m and 50m are standard stock lengths. Other lengths up to 100m can be ordered from the factory.

Drawing
Dimension [mm]

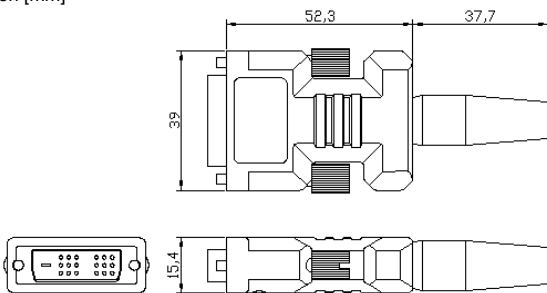

Compliance with International Standards

M1-1P0 meets the requirements of North American FCC and European CE standards for RFI/EMI emissions, material ratings, and laser safety. Consult the product specification for further details.


Recommended Operating Conditions

Parameter	Symbol	Min	Typ	Max	Units
Ambient Operating Temperature	T_A	0	25	+ 50	°C
Storage Temperature	T_s	-30		+ 70	°C
Storage Humidity	H_s	10		85	RH%

Electrical Power Supply Characteristics

($T_A = 0\text{ }^{\circ}\text{C}$ to $+50\text{ }^{\circ}\text{C}$, unless otherwise noted)

Parameter	Symbol	Min	Typ	Max	Units
Supply Voltage	V_{CC}	4.5	5	5.5	V
Supply Current	TX	I_{TCC}	-	170	200 mA
	RX	I_{RCC}	-	130	150 mA
Power Dissipation	TX	P_{TX}	0.85	1.1	W
	RX	P_{RX}	-	0.75	0.825 W

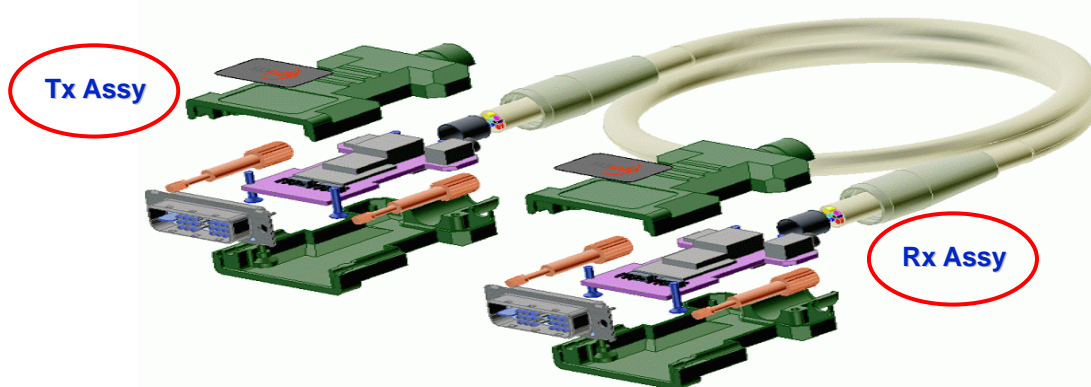

Ordering Information

Model number: M1-1P0-xxx, where xxx = length in meters. Standard lengths are 10, 20, 30 and 50 meters.



www.opticis.com

OPTICIS Co., Ltd. Headquarters

#501 Byucksan Technopia, 434-6 Sangdaewon-Dong,
Chungwon-ku, Sungnam City, Kyungki-Do,
462-120, Korea

Tel: +82-31-737-8033 (ext.101)/ Fax: +82-31-737-8079

Due to continuing development activity, Opticis Co. reserves the right to update specifications without notice.

OPTICIS NORTH AMERICA, Ltd.

70 East Beaver Creek Road, Unit 30
Richmond Hill, Ontario Canada L4B 3B2

Tel: +1 (905) 882-7019 / Fax: +1 (905) 882-7025

Version 1.03 August 2003