
## PA750



39"-75"

LB (KG 100lb (45kg)

# Articulating Wall Mount

FOR 39" TO 75" DISPLAYS

The Paramount<sup>™</sup> series wall mounts provide versatile and multi-functional features. With PA750, extend the display up to 21.35" (542mm) or fully-retract it to just 3.00" (76mm) from the wall for the perfect viewing angle. The Hook-and-Hang<sup>™</sup> system offers easy, one-person installation of the display. A ratcheting handle provides locking tilt capability for quick adjustments to the amount of tilt, reducing glare and optimizing the viewing angle. Integrated cable management protects, contains and conceals cables for a clean installation.

#### Full-motion capabilities allow you to swivel, tilt, extend or retract your display for the perfect viewing angle.

**HOOK-AND-HANG™ INSTALLATION** 

Display is easily installed by a single person

### **Additional Features**

- Ø Extends 21.35" (542mm) from the wall
- V Retracts to 3.00" (76mm) to save space
- V +15/-5° of tilt for optimal viewing angles
- perfect display positioning
- V ±5° of roll for post installation display leveling
- 1 Universal mount fits displays with mounting patterns 200 x 100 to 600 x 400mm
- The I-Shaped Adaptor plate's Ø innovative design helps avoid blocking connections on back of display
- Includes all necessary wall and Ø display attachment hardware
- Design is UL listed and tested to Ø four times stated load capacity



Please visit peerless-av.com/en-us/patents for patent information.



Swivel, tilt, extend or retract the display for the perfect viewing angle



UNIVERSAL MOUNTING PATTERN

Accommodates a variety

of display mounting patterns

Integrated cable management keeps cords and cables out of the way



installation hardware and easy to follow instructions

peerless-AV<sup>®</sup>



LOCKING TILT

Lock the display at any angle with the ratcheting handle

EXTENDS UP TO 21.35" (542mm)

Offers the perfect viewing angle

INTEGRATED CABLE MANAGEMENT Protects, contains and conceals cables for a clean, professional installation

info@peerless-av.com neerless-av.com

#### **Model Numbers**

WARRANTY: Limited 5-year

PA750 Paramount<sup>™</sup> Articulating Wall Mount for 39" to 75" Displays


#### **Product Specifications**

|       | DIMENSIONS (W x H x D)                                   | PRODUCT WEIGHT   | LOAD CAPACITY | FINISH                           | AVAILABLE COLORS |
|-------|--|------------------|---------------|----------------------------------|------------------|
| PA750 | 24.38" x 16.75" x 3.00"-21.35"<br>(619 x 425 x 76-542mm) | 16.75lb (7.60kg) | 100lb (45kg)  | Scratch resistant<br>fused epoxy | Gloss black      |

#### **Package Specifications**

|       | PACKAGE SIZE (W x H x D)                       | PACKAGE SHIP WEIGHT | PACKAGE UPC CODE | PACKAGE CONTENTS   | UNITS IN PACKAGE |
|-------|--|---------------------|------------------|--|------------------|
| PA750 | 27.50" x 4.31" x 13.88"<br>(699 x 109 x 353mm) | 19.00lb (8.62kg)    | 735029308393     | Wall mount, wall and<br>display installation<br>hardware, installation<br>instructions | 1                |

All dimensions = inch (mm)

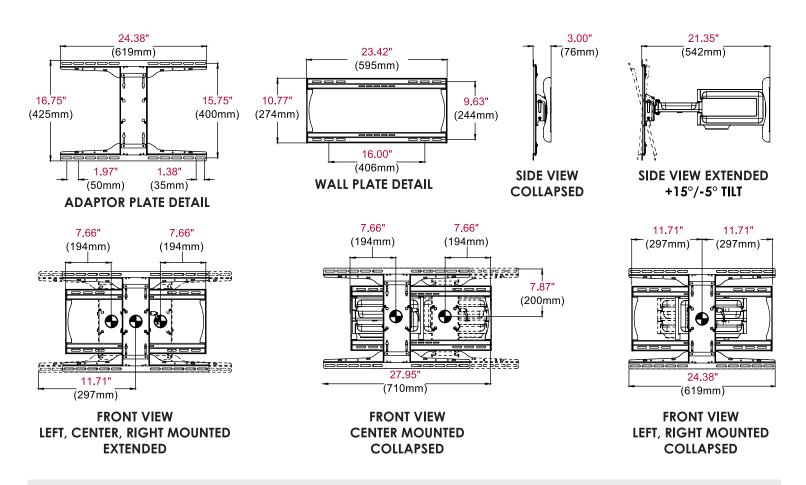

#### **Architect Specifications**

The Paramount<sup>™</sup> Articulating Wall Mount shall be a Peerless-AV model PA750 and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit **peerless-av.com** to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

#### Peerless-AV 2300 White Oak Circle

Aurora, IL 60502 USA (800) 865-2112 (630) 375-5100 Fax: (800) 359-6500 Peerless-AV Europe Unit 3 Watford Interchange Colonial Way, Watford Herts, WD24 4WP United Kingdom +44 (0) 1923 200100 Fax: +44 (0) 1923 200101 Peerless-AV de México Ave de las Industrias 413 Parque Industrial Escobedo Escobedo, N.L., Mexico 66050 +52 (81) 8384-8300 Fax: +52 (81) 8384-8360

