PFT660



FEATURES

- Integrated tilt feature with fixed angles of 0°, 2°, 5°, and 10° for increased functionality and viewing flexibility
- Universal mount fits screens with mounting patterns up to 32.60"W x 17.05"H (828 x 433mm) and VESA® compliant up to 800 x 400mm
- Low-profile design holds screen only 2" (51mm) from the wall for a clean application
- Screen adapters easily hook onto wall plate for a simple, safe and quick installation
- Safety tabs ensure screen is securely attached to wall plate
- Horizontal screen adjustment of up to 8" for perfect screen placement
- Mounts to two wood studs, concrete, cinder block or metal studs (metal stud accessory required)
- Comes with Peerless' Sorted-for-You™ fastener pack with all necessary screen attachment hardware
- UL listed

Universal Fixed Tilt Wall Mount

for 37" to 60" Flat Panel Screens

The unique single rail design of the PFT660 makes it the fastest and easiest mount to install yet. Simply hook the screen on to the single-rail wall plate to simultaneously set the tilt angle and secure it. Its patent-pending safety hooks prevent the screen from accidently being dislodged, delivering a peace-of-mind with every installation. Its simplistic design and functionality provide the ultimate in value.



LB (KG) Max load: 175lb (79kg)



















WARRANTY: Limited 5-year Model Numbers

PFT660 Universal Fixed Tilt Wall Mount for 37" to 60" Flat Panel Screens

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
PFT660	34" x 18.51" x 2" (864 x 470 x 51mm)	6.4lb (2.9kg)	175lb (79kg)	Scratch resistant fused epoxy	Gloss black


Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
PFT660	35.375" x 5.25" x 2.125" (89 x 133 x 54mm)	7lb (3.1kg)	735029249931	Wall plate, universal screen adapters, mounting and screen attachment hardware	1

Accessories

ACC415: 4-pack Metal Stud Fastener Kit

All dimensions = inch (mm)

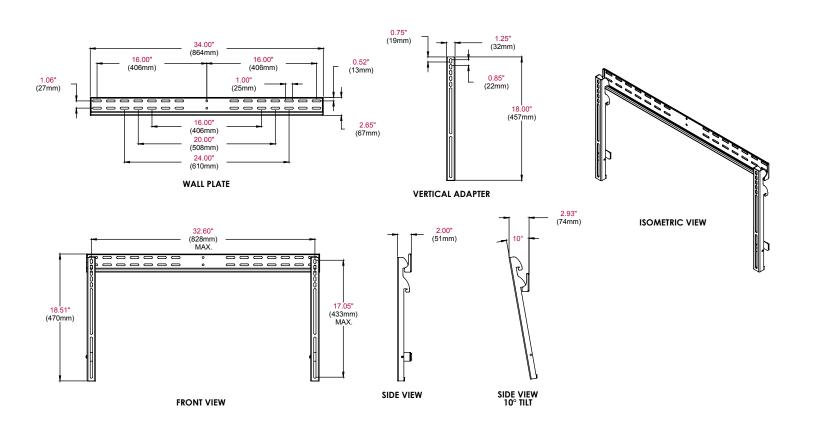

ARCHITECTS SPECIFICATIONS

The Universal Fixed Tilt Wall Mount shall be a Peerless model PFT660 and shall be located where indicated on the plans. It shall be constructed of heavy gauge cold rolled steel and finished with scratch resistant Black Fused Epoxy.

Assembly and installation shall be done according to instructions provided by the manufacturer.

