


Highlights:

- Stranded conductors
- Suitable for extreme in- & outdoor use

H07RN-F TITANEX® flexible cable is intended for installations with moving equipment, electric appliances and for building sites. The cable may be rated 0,6/1 kV where the installation has built-in protection and for motors in lifting appliances - machine tools - etc.

This cable can be used in refrigerating installations.

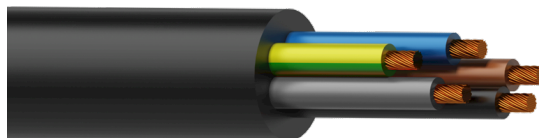

Physical Characteristics:

Inner conductor	Insulation	Colours	Blue / Brown / Yellow & Green
Outer jacket	Material		Elastomer 12.45 mm (Ø)
	Colours		Black
Inner conductor	Material		BC 48 x 0.254 mm (Ø) (OFC)
	Section		2.5 mm ²
	American Wire Gauge		13 AWG
	Number of conductors		3
			3

Electrical Characteristics:

Rated voltage	450 / 750 V
Max. current	32 Amp