


### Product information:

100 meter reel of 26 AWG-size High quality HDMI cable. If, installed correctly this cable can reach high speeds that live up to the highest HDMI standards. This cable is designed for installation using the PROCAB Contractor Series equipment. Lengths below 8m will perform as HIGH SPEED HDMI with ETHERNET Lengths from 8m until 12m will perform at STANDARD SPEED HDMI with ETHERNET standards. Recommended HD distance : 20 m

### Highlights:


- Triple shielding

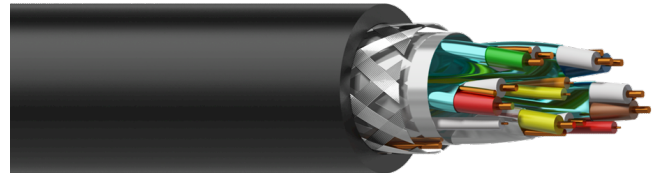

### Certification:



### Properties:



### Inner Conductors:



STRANDED TINNED  
COPPER



SOLID OXYGEN FREE  
COPPER

### Shielding:



TINNED COPPER  
BRAIDING



ALUMINUM  
FOIL



BARE COPPER  
DRAIN WIRE

### Usage:

MOBILE

INSTALL

Physical Characteristics:

Inner conductor	Insulation	Material	FM-PE 1.1 mm (Ø) (5 pair)
			HD-PE 0.9 mm (Ø) (1 pair)
			HD-PE 0.9 mm (Ø) (2 cond.)
	Shielding	Aluminium foil	Al-mylar, 100% coverage - 25% Overlap
		Drain wire	BC 1 x 0.404 mm (Ø) (OFC)
Overall shielding	Aluminium foil		Al-mylar, 100% coverage - 25% Overlap
	Drain wire		BC 1 x 0.404 mm (Ø) (OFC)
	Braiding		AL-MG 16 x 12 x 0.12 mm (Ø)
Outer jacket	Material		PVC 8 mm (Ø)
	Colours		Black
Inner conductor	Material		BC 1 x 0.404 mm (Ø) (OFC) (5 pair)
			TC 7 x 0.16 mm (Ø) (OFC) (1 pair)
	American Wire Gauge		26 AWG (5 pair)
			26 AWG (1 pair)
			26 AWG (2 cond.)

Mechanical Characteristics:

Temperature range	Fixed installation	- 40 °C till + 80 °C
	Flexible installation	- 15 °C till + 60 °C
Bending radius	Fixed installation	6 x outer diameter
	Flexible installation	8 x outer diameter

Variants:

- HDM26/1 - 100 m wooden reel
- HDM26 - 1 meter