



WX502

Universal wall speaker 5 1/4"

Highlights:

- Vertical and horizontal mounting
- Multi-tapping 100V line transformer
- 1" Dome tweeter
- 5 1/4" Low frequency loudspeaker
- 100V and low impedance connection possibility

The WX502 is a powerful 2-way performance speaker suitable for a wide variation of applications, ensuring true-to-nature, high fidelity reproduction of music and speech. It is fitted with an 1" dome tweeter and a 5 1/4" low frequency loudspeaker, capable of delivering a power of 50 Watt. It can be used in standard 8 Ohm systems but also in 100V PA systems with power taps for 40 Watt, 20 Watt and 10 Watt. The elegant shaped synthetic enclosure is available in two different colors (black & white), making it blend into any environment, going from standard indoor home to special indoor design interiors. The included mounting bracket allows horizontal and vertical mounting as well as focusing of the speaker, and an integrated advanced protection network protects the tweeter against overload.

Applications:


- Retail
- Corporate spaces
- Residential
- Clubs, bars, restaurants



Impedance:



Voltage:



System specifications:

Speaker type		2-way
Max. Power		100 W
RMS Power		50 W
Impedance		8 Ω
Line Transformer Tappings	1	40 W / 250 Ω
	2	20 W / 500 Ω
	3	10 W / 1000 Ω
Sensitivity (1W/1m)		87 dB
Sound Pressure (Max. W/1m)	@ 8 Ω	104 dB
	@ 100 V	102 dB
Frequency	Response (\pm 3 dB)	70 Hz - 18 kHz
	Range (-10 dB)	55 Hz - 20 kHz
Crossover	Frequency	2.5 kHz
	Type	Passive built-in
Dispersion	Horizontal	110°
	Vertical	110°
Ingress Protection rating		IP40
Drivers	HF	1"
	LF	5"

Product Features:

Dimensions		212 x 147 x 136 mm (W x H x D)
Weight		2.540 kg
Operating temperature		-25 °C ~ 70 °C
Construction		ABS
Mounting & handling		Mounting bracket
Front finish		Aluminium grill
Colours		Black (RAL9005) (WX502/B)
		White (RAL9003) (WX502/W)
Accessories	Included	Mounting bracket

Variants:

- WX502/B - Black version
- WX502/W - White version


Shipping & Ordering:

Packaging

Cardboard box

Shipping weight & volume

5.800 kg - 0.0185 Cbm (2 pcs)

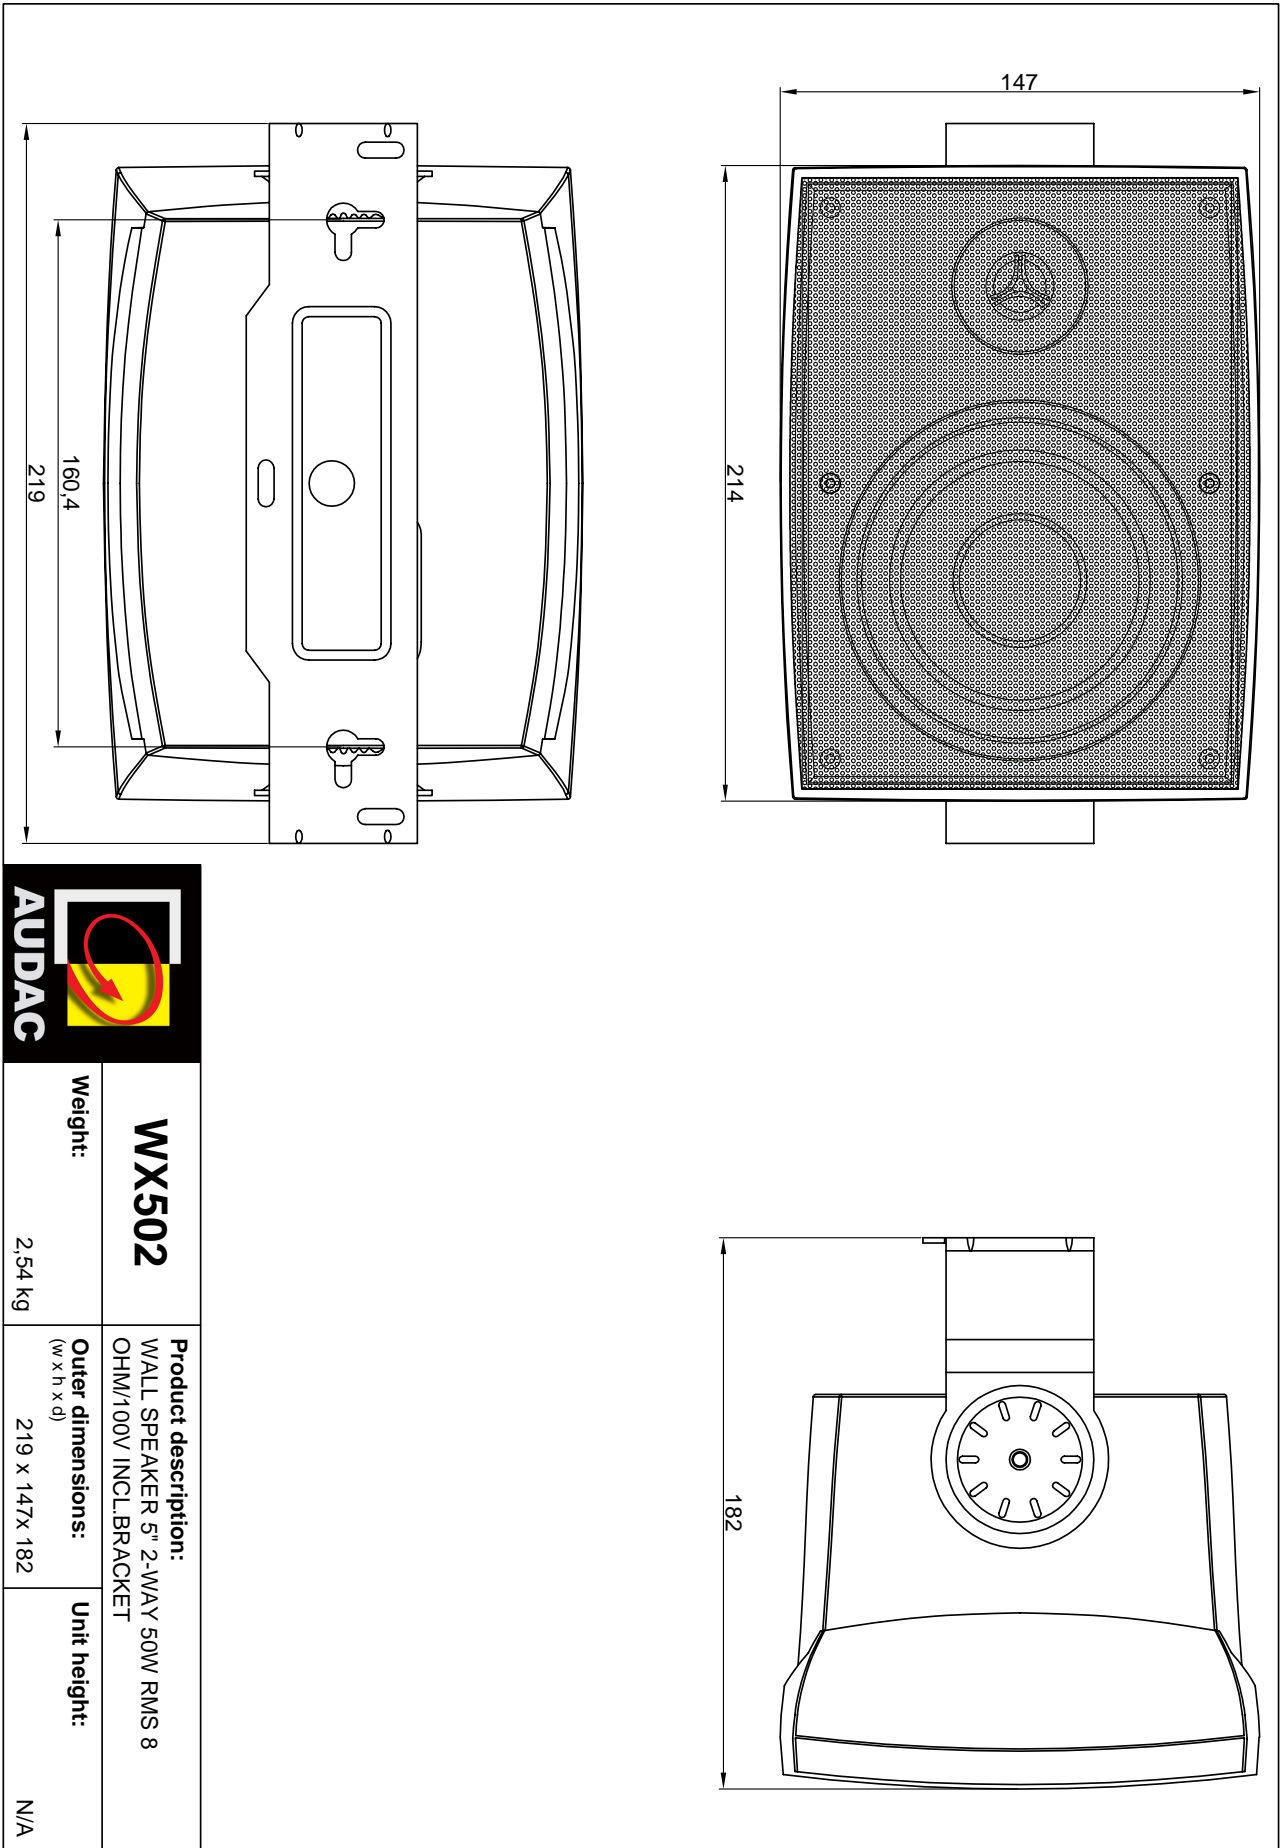

<p>WX502</p>	<p>Product description: WALL SPEAKER 5" 2-WAY 50W RMS 8 OHM/100V INCL. BRACKET</p>	<p>Unit height: N/A</p>
<p>Weight: 2,54 kg</p>	<p>Outer dimensions: (w x h x d) 219 x 147 x 182</p>	