

SEETRONIC

Product Data Sheet

Product Type

Power Adapter

Product Model

SAC3MM


Customer Name

Manufacturer	Prepared	Checked	Approved

Customer	Received	Checked	Confirmed



Product Data Sheet

Product Type	Power Adapter	
Product Model	SAC3MM	
Product Features		
<ul style="list-style-type: none">➤ Power connector coupler for linking cables➤ Power-in (SAC3MPA) - power-out (SAC3MPB)		



Product Data Sheet

Product Parameters

Item	Specification
Connection type	Adapter

Electrical Parameters

Item	Specification
Contacts No.	2+PE
Rated current	20 A
Rated voltage	250 V AC
Contact resistance	$\leq 5 \text{ m}\Omega$
Dielectric strength	4 kV DC
Insulation resistance	$> 1000 \text{ M}\Omega$

Mechanical Parameters

Item	Specification
Service life	> 1000 mating cycles



Product Data Sheet

Material and Environmental Parameters

Item	Specification
Contacts	Cu alloy
Contact plating	Ag
Housing	Aluminum
Flame-retardant grade	UL 94-V0
Temperature range	-30°C ~ +80°C


Standards and Certifications

Standards	IEC61984
-----------	----------



Product Data Sheet

Product Drawing

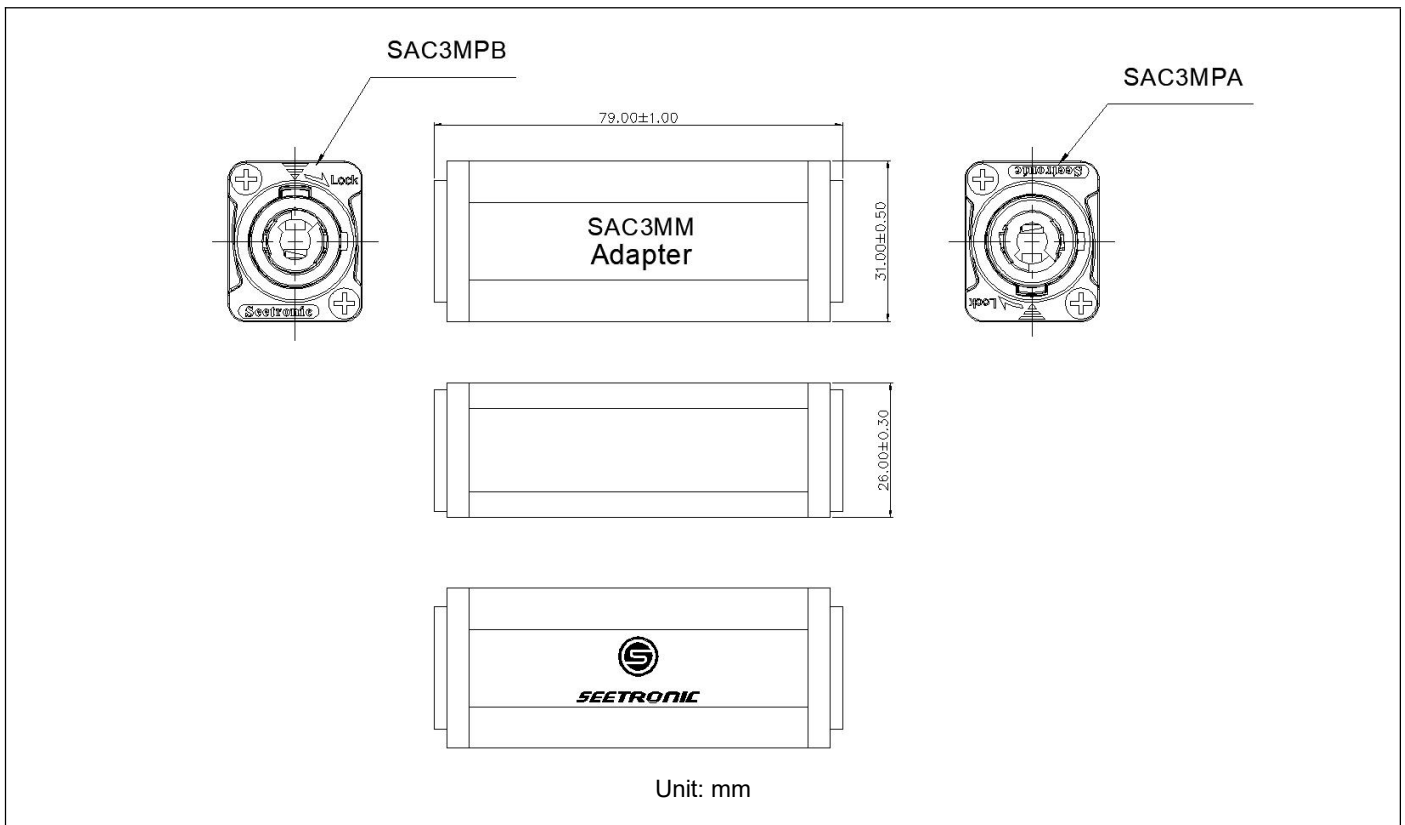

Packaging Method

PE bag, 1 pc per bag, 50 pcs per inner carton, 5 inner cartons per master carton (250 pcs per master carton)

Accessory

- | | |
|--|--|
| <input checked="" type="checkbox"/> No accessories | <input type="checkbox"/> Back fastener plate |
| <input type="checkbox"/> Screws and Nuts | <input type="checkbox"/> Other |

