SAX762PU



FEATURES

- Low-profile when retracted at 2.6" (66mm) and can extend up to 26.54" (674mm) from the
- Internal cable management provides ample area to run cables to complete a clean, professional installation
- Stylish wall plate covers create a finished look and are easy to install and remove
- One-Touch™ tilt mechanism allows adjustment of +15/-5° without the use of tools
- ±5° of roll for post-installation leveling
- Display can be rotated from landscape to portrait without removing the display
- ±0.5" of vertical adjustment for post-installation height adjustment fine-tuning
- Open wall plate design and cutout increase electrical and cable management options
- Double stud installation



Universal Articulating Wall Arm

for 40" to 75" Displays

From any angle, this wall arm mount reflects remarkable form and function. Retracting the flat panel display to a mere 2.6" (66mm) from the wall, extending it out to 26.54" (674mm) from the wall and allowing for a full 180° of side to side motion offers the possibility of perfectly positioning displays up to 75". A double stud installation creates a more sound design for heavier displays. With advanced features such as postinstallation height adjustment, roll and lateral shift, fine-tuning of the installation is quick and simple. This articulating arm also integrates an internal cable management system that creates a clean and organized installation, while at the same time protecting the cables. Integrate an in-wall cable and power accessory into the wall plate cutout to complete the installation. Designed and built in the USA, this mount maintains the same brilliant quality you expect to find with the SmartMount® Series of Articulating and Pivot Wall Arm Mounts, but provides the premium features you can only find with SmartMountXTTM.



Display size: 40"-75"



Max load: 110lb (50kg)

VERTICAL ADJUSTMENT

Up to 1" (25.4mm) of vertical adjustment for fine-tuning the height of the display



±5° OF ROLL

For quick post-installation leveling adjustments

LANDSCAPE TO PORTRAIT

Rotate the display from landscape to portrait without having to remove it



Up to 1" (25.4mm) of height adjustment



Arm retracts to just 2.60" (66mm) and extends up to 26.54" (674mm) from the wall



Optional Accessory













INTEGRATED PARTNER PROGRAM

Patented. Design Patent No. D623,634. Utility Panent No. 8,561,955.

Contact your Peerless-AV sales representative for more information



WARRANTY: Limited 5-year Model Numbers

SAX762PU

SmartMountXT™ Universal Articulating Wall Arm for 40" to 75" Displays

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
SAX762PU	29.00" x 19.50" x 2.60"-26.54" (737 x 495 x 66-674mm)	37.50lb (17.01kg)	110lb (50kg)	Powder coat	Black

Package Specifications


	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
SAX762PU	21.25" x 6.125" x 35.75" (540 x 156 x 908mm)	39.25lb (17.80kg)	735029282679	Mount, wall and display attachment hardware, installation instructions, display adaptors	1

Accessories

ACCXT400: Recessed Power Outlet with Low Voltage In-Wall Cable Routing ACCXT200: Soundbar Accessory Mount WSP756: Metal Stud Wall Plate ACCXT300: Video Conferencing Shelf Accessory ACC953: Component Shelf Accessory IBA4-W: Easy Mount Recessed Low Voltage Cable Plate

IBA5-W: ACCXT100: Left and Right Speaker Accessory Mount Recessed Low Voltage Media Plate with Duplex Surge Suppressor

All dimensions = inch (mm)

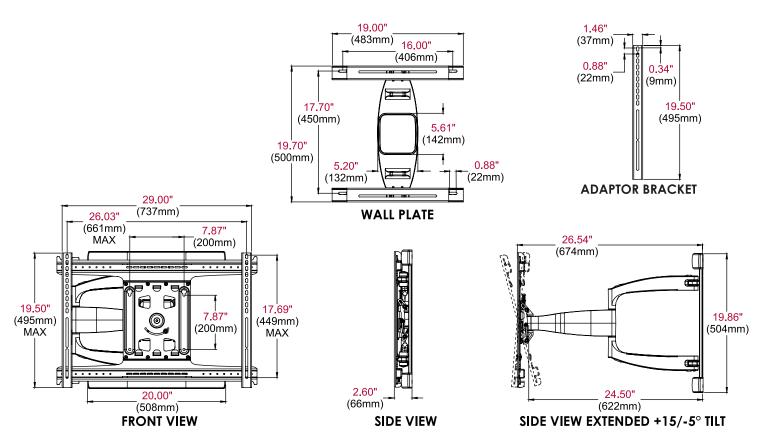

ARCHITECTS SPECIFICATIONS

The SmartMountXT™ Universal Articulating Wall Arm shall be a Peerless-AV model SAX762PU and shall be located where indicated on the plans. It shall feature scratch resistant black fused epoxy finish. Assembly and installation shall be done according to instructions provided by the manufacturer.

Peerless Industries, Inc. ■ 2300 White Oak Circle ■ Aurora, IL 60502 ■ (800) 865-2112 ■ (630) 375-5100 ■ Fax: (800) 359-6500 ■ peerless-av.com



