### SFX650(P)





Display size 37"-75"



Max load 120lb (54kg)

# **SMART**MOUNT **XT**

## Universal Flat Wall Mount

FOR 37" TO 75" DISPLAYS

Limitless placement opportunities are delivered with speed and ease with both horizontal and vertical adjustment capability. Its slim, open wall plate architecture delivers flat panel display placement flexibility and cable management. This slim mount is the ultimate solution for secure, low-profile applications.

SFX650 delivers limitless placement opportunities with speed and ease, including horizontal and vertical adjustment for post-installation leveling.




#### **Additional Features**

- Open wall plate design allows for total wall access, increasing electrical and cable management options
- Up to 25" (635mm) of horizontal display adjustment for centering display on wall
- Up to 1" (25mm) of vertical adjustment on each universal display adaptor bracket for post-installation leveling and height adjustment fine-tuning
- Secure installation with theft resistant security screws (on security units)
- Easy-Glide™ design ensures that the display is securely attached to the wall plate
- Universal display adaptor brackets easily hook onto wall plate for fast installation
- Low-profile design holds display 1.21" (31mm) from the wall
- Fits displays with mounting hole patterns from 75 x 75mm (2.95"W x 2.95"H) to 744 x 405mm (29.29"W x 15.95"H)

#### POST-INSTALLATION ADJUSTMENT

±0.5" of vertical adjustment for post-installation leveling and height adjustment fine-tuning

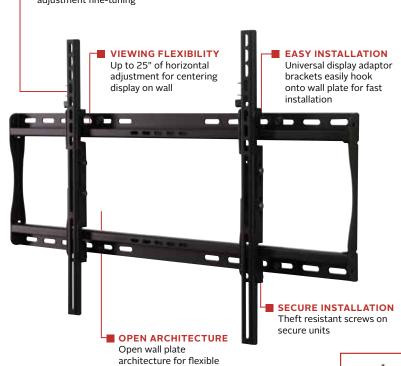













Patented. Design Patent No. D659.698. Utility Patent No. 8,348,212; 8,517,322.



Contact your Peerless-AV sales representative for more information

cable management and wall placement



Low-profile design holds display 1.21" (31mm) from the wall



SFX650 SFX650P SmartMountXT<sup>™</sup> Universal Flat Wall Mount for 37" to 75" Displays - security models SmartMountXT<sup>™</sup> Universal Flat Wall Mount for 37" to 75" Displays - standard models

#### **Product Specifications**

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
SFX650(P)	30.87" x 16.89" x 1.21" (784 x 429 x 31mm)	5.72lb (2.59kg)	120lb (54kg)	Powder coat	Black

#### **Package Specifications**


	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
SFX650(P)	10.125" x 3.5" x 32.5" (257 x 89 x 826mm)	8.3lb (3.76kg)	SFX650: 735029278894 SFX650P: 735029279358	Universal Flat Wall Mount, attachment hardware, installation instructions	1


#### **Accessories**

ACCXT302: SmartMountXT™ Video Conferncing Shelf accessory


ACCXT400: In-Wall Cable and Power Management Accessory with AC Surge Suppressor

All dimensions = inch (mm)









#### **Architect Specifications**

The SmartmountXT™ Universal Flat Wall Mount shall be a Peerless-AV® model SFX650 or SFX650P and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

#### Peerless-AV

2300 White Oak Circle Aurora, IL 60502 USA

(800) 865-2112 (630) 375-5100 Fax: (800) 359-6500

#### Peerless-AV Europe

Unit 3 Watford Interchange Colonial Way, Watford Herts, WD24 4WP United Kingdom

+44 (0) 1923 200100 Fax: +44 (0) 1923 200101

#### Peerless-AV de México

Ave de las Industrias 413
Parque Industrial Escobedo
Escobedo, N.L.,
Mexico 66050

+52 (81) 8384-8300 Fax: +52 (81) 8384-8360



LIT-0741 rev.3