STX645(P) STX645I





Display size 32"-60"



Max load 100lb (45kg)

SMARTMOUNT Universal Tilt Wall Mount

FOR 32" TO 60" DISPLAYS


Limitless placement opportunities are delivered with speed and ease with both horizontal and vertical adjustment capability. Its slim, open wall plate architecture delivers display placement flexibility and enables hands-free behind-the-display access along with cable management. Quick and easy installation and optional IncreLok™ Tilt technology complete the ultimate secure, low profile display installation

STX645's pre-tensioned universal tilt adaptor brackets offer up to +15/-5° of One-Touch™ tilt adjustment in one easy motion.

Additional Features

- Open wall plate design allows for total wall access, increasing electrical and cable management options
- Optional IncreLok™ feature offers fixed tilt lock in 5° increments
- Easy-Glide[™] design ensures that the display is securely attached to the wall plate
- 5° of back tilt offers 3" of space for hands-free, behind the display access
- Up to 13" (330mm)of horizontal adjustment for centering display on wall
- Up to 1" (25mm) of vertical adjustment on each universal display adaptor bracket for post-installation leveling and height adjustment fine-tuning
- Universal tilt adaptor brackets easily hook onto wall plate for fast installation
- Low profile design holds display 1.69" (43mm) from the wall
- Fits displays with mounting hole patterns from 100 x 100mm (3.94"W x 3.94"H) to 431 x 405mm (16.96"W x 15.95"H)





IDEAL VIEWING ANGLE Pre-tensioned universal tilt

adaptor brackets offer up to +15/-5° of One-Touch™ tilt adjustment in one easy motion

SECURE INSTALLATION

Theft resistant screws on secure units

OPEN ARCHITECTURE Open wall plate architecture for flexible cable management and

wall placement













Patented. Design Patent No. D659.689. Utility Patent No. 8,313,073; 8,348,212; 8,282,059; 8,517,322.



INTEGRATED PARTNER PROGRAM

Contact your Peerless-AV sales representative for more information



Increased security with included Master Lock 510KAD keyed-alike padlock on locking model



STX645	SmartMountXT [™] Universal Tilt Wall Mount for 32" to 60" Displays - security models
STX645L	SmartMountXT [™] Universal Tilt Wall Mount for 32" to 60" Displays - security locking model
STX645P	SmartMountXT™ Universal Tilt Wall Mount for 32" to 60" Displays - standard models

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
STX645(P) STX645L	19.37" x 16.89" x 1.69"-6.55" (492 x 429 x 43-166mm)	7.13lb (3.23kg) 7.63lb (3.45kg)	100lb (45kg)	Powder coat	Black

Package Specifications


	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
STX645(P) STX645L	10.125" x 3.5" x 21.125" (257 x 89 x 537mm)	9.1lb (4.13kg) 10.6lb (4.99kg)	STX645: 735029278931 STX645L: 735029278943 STX645P: 735029279372	Universal Tilt Wall Mount, attachment hardware, installation instructions	1


Accessories

ACCXT302: SmartMountXT™ Video Conferncing Shelf accessory

ACCXT400: In-Wall Cable and Power Management Accessory with AC Surge Suppressor

All dimensions = inch (mm)



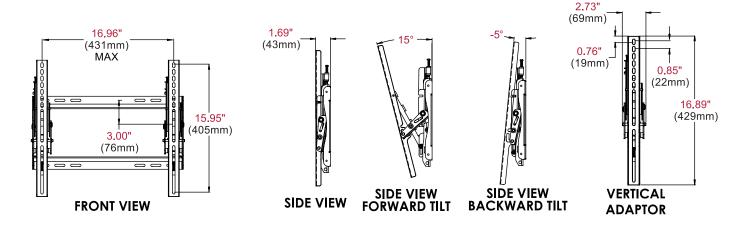

Architect Specifications

The SmartmountXT™ Universal Tilt Wall Mount shall be a Peerless-AV® model STX645, STX645L or STX645P and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV

2300 White Oak Circle Aurora, IL 60502 USA

(800) 865-2112 (630) 375-5100 Fax: (800) 359-6500

Peerless-AV Europe

Unit 3 Watford Interchange Colonial Way, Watford Herts, WD24 4WP United Kingdom

+44 (0) 1923 200100 Fax: +44 (0) 1923 200101

Peerless-AV de México

Ave de las Industrias 413 Parque Industrial Escobedo Escobedo, N.L., Mexico 66050

+52 (81) 8384-8300 Fax: +52 (81) 8384-8360



LIT-0743 rev.3