
## TSD-GPN1200



### Sound Masking Generator





## TSD-GPN1200

#### Features

- Balanced Line Output Plus 4W, 70.7V Output
- Adjustable Gain and Hi-Cut Filter
- EQ & Gain Bypass for Line Output
- Selectable Pink or White Noise Source
- Stand Alone or Rack Mountable
- Security Covers Included for All Rear Panel Controls
- Meets Energy Star Standards
- Compact Chassis Design

### **Audio Applications**

- Audio Sound Masking
- Security Masking
- Pink Noise Generator
- White Noise Generator
- Amplifier

### Atlas Time Saving Devices

New Atlas Sound Time Saving Devices are designed to solve some of the common audio system problems in the easiest and in the most efficient and cost-effective way. Utilizing the highest quality components and inspired by real world installation issues, the Atlas Sound TSDs include mixers, amplifiers, preamps, and other distribution and control devices to simplify your connections, provide specific application needs, and add flexibility in expansion and changes that prevent expensive system overhauls.

The Time Saving Devices are loaded with features making it versatile and user friendly. The TSD design mandate was to make the installation quick and reliable, saving you valuable time and money. Each model is housed in a compact  $1.5" \times 3.9" \times 2.75"$  footprint that allows for placement almost anywhere. Common features include removable individual I/O connectors for quick and precise wiring, separate ground terminals for all I/Os assuring secured connections, and removable level controls that can be replaced with a tamper-proof security cover.

#### Description

The Atlas Sound TSD-GPN1200 sound masking generator is perfectly suited for basic sound masking systems. The analog topology design eliminates repeating cycles commonly found in other manufactures low cost digital designs.

The TSD-GPN1200 allows selection between pink or white noise sources and incorporates a variable balanced output to match input requirements of Atlas Sound equalizers and amplifiers.

In addition to the line level output, a 4W, 70V output is provided to power up to six masking loudspeakers tapped at .5W each. A variable hi-cut filter with operating range between 1 kHz and 8 kHz at a slope of 6 dB per octave supports equalization requirements for most basic Sound Masking systems. Both outputs may be used simultaneously allowing large zones to be addressed with external equalization and amplification while a smaller zone is powered by the internal 70.7V amplifier with spectrum control provided by the on board hi-cut filter.

The TSD- GPN1200 is highly efficient and meets Energy Star standards as one 24V DC power supply can power multiple Atlas Time Saving Devices (available separately).

### Audio Applications

- Government Buildings
- Medical Facilities
- Office Environments
- Churches
- Restaurants
- Schools
- Industrial Facilities



1601 JACK MCKAY BLVD. ENNIS, TEXAS 75119 U.S.A. TELEPHONE: (800) 876-3333 FAX (800) 765-3435

# AtlasSound.com 1/3

#### Specifications


Chassis ColorBlackChassis MaterialAluminumInputsInternal Pink & White SelectableNoise GeneratorInternal Pink & White SelectableOutputsConnectionTypeOty 1, Balanced LineConnectionRemovable 3 Position Captive Screw 3.5mm SpacingImpedance300Ω Balanced, 150Ω UnbalancedLine Output LevelMaximum Output 500mVTypeOty 1, Speaker Out 70V Masking Systems ConnectionConnectionRemovable 3 Position Captive Screw
Noise GeneratorInternal Pink & White SelectableOutputsTypeOty 1, Balanced LineConnectionRemovable 3 Position Captive Screw 3.5mm SpacingImpedance300Ω Balanced, 150Ω UnbalancedLine Output LevelMaximum Output 500mVTypeOty 1, Speaker Out 70V Masking Systems
TypeOty 1, Balanced LineConnectionRemovable 3 Position Captive Screw 3.5mm SpacingImpedance300Ω Balanced, 150Ω UnbalancedLine Output LevelMaximum Output 500mVTypeOty 1, Speaker Out 70V Masking Systems
3.5mm Spacing Line Output Level Maximum Output 4W
ControlsLevel ControlQty 1, Removable Knobs with Security CoversNoise Generator SelectPink or WhiteLine Out SelectPre or Post EQEQ AdjustRecessed Screw Driver
Indicators Power Blue
ElectricalToplogyRandom AnalogFrequency Response20Hz - 20kHz Line Out Pre EQ OnlyEQ FilterHigh Cut, Variable, 1kHz - 7kHz/6dB
MountingVelcroIndustrial Grade, IncludedBracketsOty 2, IncludedTSD-RMKOptional 1 RU Rack Mount PanelCable RetainerOty 1
Power Requirements24VDC250mAAverage Power Consumption Current 100mAAverage Power Consumption VA Watts 2.4W
Dimensions H 1.5" (39mm) x W 4" (101mm) x D 2.5" (70mm)   Weight 6oz, .165kg




1601 JACK MCKAY BLVD. ENNIS, TEXAS 75119 U.S.A. TELEPHONE: (800) 876-3333 FAX (800) 765-3435

# AtlasSound.com 2/3

### **Block Diagram**

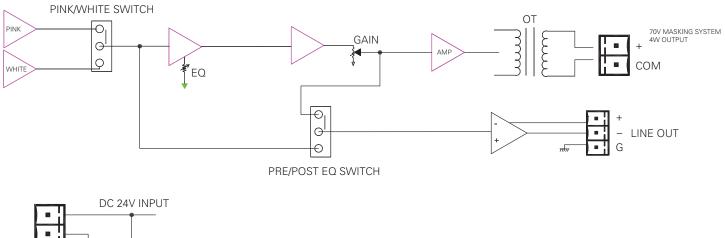





1601 JACK MCKAY BLVD. ENNIS, TEXAS 75119 U.S.A. TELEPHONE: (800) 876-3333 FAX (800) 765-3435

# AtlasSound.com 3/3