


EXPECT THE BEST

Studiomaster

V5SA

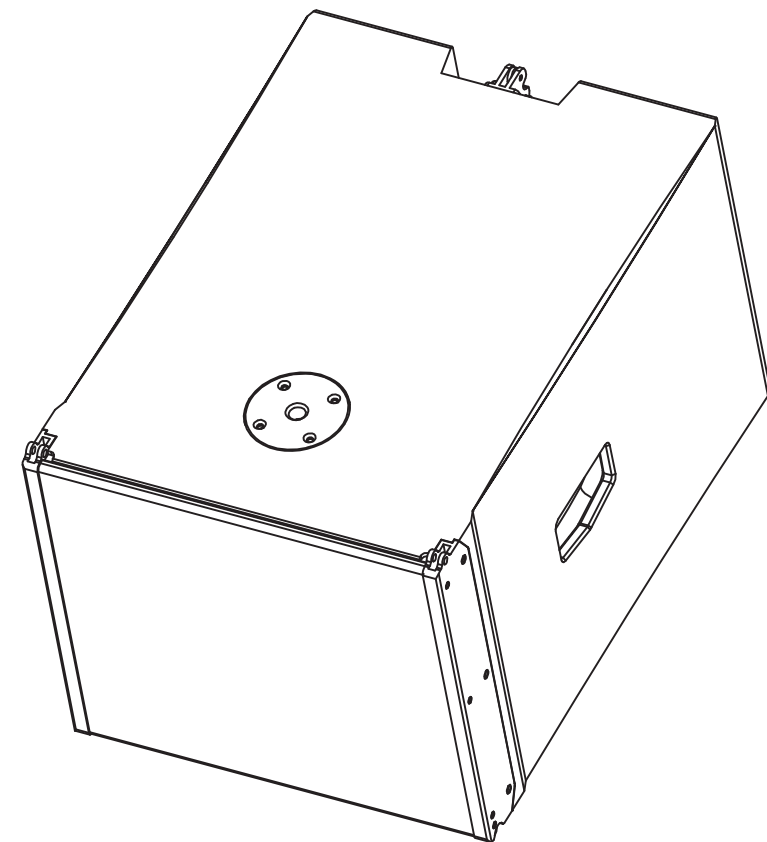

**USER
GUIDE**

Studiomaster

**Unit 11,
Torc:MK
Chippenham Drive
Kingston
Milton Keynes
MK10 0BZ
United Kingdom.**


www.studiomaster.com

1.Introduction

V5SA adopts two 10 " , 2.6 " voice coil high power units. The vented horn design improves the originally high efficiency. to a higher level. The active loudspeaker combines the low distortion speaker technology and linear amp technology and DSP audio processing. The input signal is amplified by pre amp and processed by DSP, then assigned to the power amplifier output and to the subwoofer and full range loudspeaker to form a whole system.

2. Application

- * conference room, multi-function hall
- * theater, stadium, church

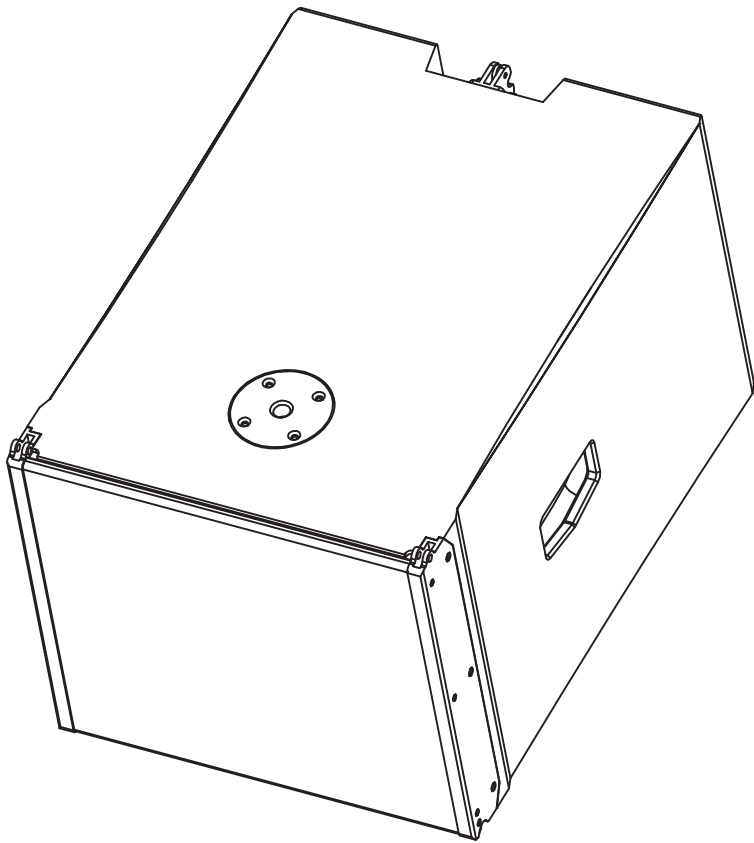

3.Technology

Model	V5SA
Type	active subwoofer
frequency response	50Hz~350Hz (-10dB) 55Hz~300Hz (±3dB)
LF unit	2×10" (254mm) /2.6" voice coil
Sensitivity(1W@1m)	97dBu
Rated impedance	4 Ω (LF) 4 Ω (MLF,HF)
Power handling	750W(LF) 750W(MLF,HF)
Max SPL(@1m)	130dB
Crossover	80Hz
Dimension(WxHxD)	505×410×652(mm)
Weight	33kg