

# Versa® USB22D

## Dante® to USB Adapter



Versa USB22D lets you connect any computer to a Dante network with no software installation and can be used with any audio application for playback or capture, making it ideal for conference rooms, classrooms, and lecture halls.

- > Supports 2x2 channels of bidirectional audio, allowing PCs and mobile devices to playout and capture audio with Dante-enabled devices over a standard IP network.
- > Automatically discover and natively configure using Audinate® Dante® Controller software.
- > Built-in support for Dante Audio over IP and AES67 RTP transport formats.
- > Includes cables to connect to a USB C host port and a USB Type A host port.
- > Power with the USB port on a computer or with a PoE (Power over Ethernet) switch—a separate power supply is not needed.
- > Delivers bit-perfect audio reproduction, super-low latency, and sample-accurate synchronization across the entire Dante network.
- > Works seamlessly with Dante-enabled devices including ClearOne DSP mixers, Wireless Microphones, and Beamforming Microphones.
- > Dante Domain Manager ready.


### APPLICATIONS

- BYOM Audio Conferencing
- In-Room Presentation

### WORKSPACES

- Small to mid-sized meeting rooms
- Boardrooms
- Executive Offices
- Classrooms

## VISUAL COLLABORATION

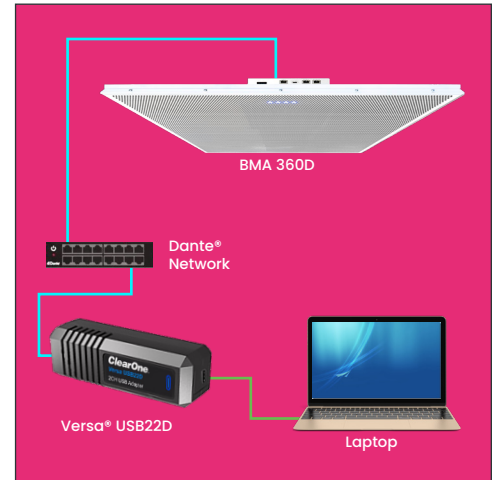

Versa USB22D enables any computer to be used with the ClearOne BMA 360D ceiling tile beamformer.



### Simple BYOM Connectivity

Connect to either a USB C or USB A port on any computer using the included cables.

# Versa® USB22D

## Dante® to USB Adapter

- PART NUMBER** ..... • **910-3200-309**
- CONNECTORS** ..... • USB C: USB 2.0 Device, Driverless 2x2 USB Audio  
• RJ-45 Jack: Dante network port, PoE
- POWER** ..... • Power Input: USB 5 V or 802.3af PoE  
• Power Consumption: 9 Watts (Max)
- DANTE** ..... • Sample Rate: 48 KHz  
• Bit Depth: 24 Bits/Sample  
• Channels: 2 Transmit X 2 Receive
- INCLUDED USB CABLES** ..... • USB C to USB Type A: 20 cm (8 in) long  
• USB C to USB C: 20 cm (8 in) long
- PHYSICAL** ..... • Dimension (W\*H\*D): 115 x 34 x 28 mm (4.5 x 1.3 x 1.1 in)  
• Net Weight: 0.7 Kg (0.15 lbs)  
• Operating Temperature: -5 to +55 °C  
• Storage Temperature: -25 to +70 °C
- 

## SALES AND INQUIRIES

### Headquarters

5225 Wiley Post Way  
Suite 500  
Salt Lake City, UT 84116

### US & Canada

Tel: +1.801.975.7200

### International

Tel: +1.801.975.7200

### Sales

Tel: +1.801.975.7200  
sales@clearone.com

### Tech Support

Tel: +1.801.974.3760  
videotechsupport@clearone.com