



VIEW® Lite is the newest and most economical addition to our AV over IP Streaming line. It provides essential functionality that meets the full needs of simple AV over IP applications while simultaneously delivering superb price-to-performance value.

VIEW Lite is a JPEG2000 compression technology based solution, with very low latency at about 1.5 frames, end-to-end, with resolutions of 4K60 with 4:2:0 color space; and 4K30 and 1080p60 with 4:4:4 color space support for ultra high-quality live video streaming and distribution applications over a dedicated IP network.

## Features

- + Lowest priced AV over IP streaming solution
- + JPEG2000 codec standard technology
- + Very low end-to-end latency of around 1.5 frames
- + High bandwidth requirement of around 850 Mbps
- + 4K60 resolution with 4:2:0 color space support
- + 4K30, 1080p60 resolution with 4:4:4 color space support
- + HDCP for content protection
- + USB HID control through keyboard/mouse
- + IR and RS232 control
- + PoE and DC power



## APPLICATIONS

Corporate

Education


Hospitality

Entertainment

Transportation

Houses of Worship

### Front Panel

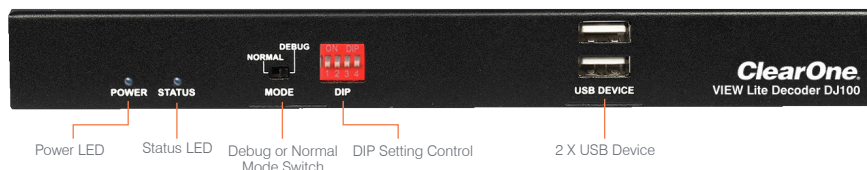

### Back Panel



## PRODUCT SPECIFICATIONS

### Video

#### Codec:

JPEG2000

#### Bandwidth:

850 Mbps

#### HDMI OUT:

X1

Decoded stream resolution support up to 4K@50/60Hz 4:2:0, 4K @24/30Hz 4:4:4, 8-bit, with multi-channel audio

### Audio

#### Audio Output:

3.5mm jack for analog audio output extract from HDMI

### Control

#### Serial RS232 Port:

3.5mm phoenix jack for the serial data transmission

#### IR Input:

3.5mm phone jack for IR receiving

#### IR Output:

3.5mm IR jack for IR transmitting

#### USB Device:

USB Type-A connector

Connect to HID device, such as a mouse or keyboard, to control the Host device connected to the Encoder EJ100

### General

#### LAN / PoE:

RJ-45 Ethernet jack with PoE support  
IEEE 802.3AF PoE PD standard  
10/100/1000Mbps Ethernet Port

#### Reset:

Factory reset by pressing the button continuously for 5 seconds

### LEDs:

LED Color	Indicator	Response
Blue	Status	Solid: The Decoder is actively connected to network and a destination is detected; otherwise the LED is off. Blinking: Network only, no destination detected.
Red	Power	Power is applied from PoE or external DC power supply.

### Modes:

NORMAL: Decoder's RS232 is working for serial data transmission  
DEBUG: Decoder's RS232 is working for DEBUG

### DIP:

For quick setting of multiple units working in the same network without Controller or PC software

### Power:

12V 1A DC power supply with locking (included)

### Mechanical

#### Dimensions (W x H x D):

8.7" × 1" × 5.1"  
(220mm × 25mm × 130mm)

#### Weight:

1.63 lbs (0.74 kg)

#### Mounting:

Mounting ears included

#### Operating Temperature:

32 to 104 °F (0 to 40 °C)

### Part Number

VIEW Lite Decoder DJ100: 910-0100-002

### Other VIEW Lite Products

VIEW Lite Encoder EJ100: 910-0100-001

VIEW Lite Controller CJ100: 910-0100-003

## SALES AND INQUIRIES

### Headquarters

5225 Wiley Post Way,  
Suite 500  
Salt Lake City, UT 84116

### US & Canada

Tel: 801.975.7200  
TollFree: 800.945.7730  
Fax: 801.303.5711

### International

Tel: +1.801.975.7200  
global@clearone.com

### Sales

Tel: 801.975.7200  
sales@clearone.com

### TechSales

Tel: 801.974.3760  
techsales@clearone.com

### TechSupport

Tel: 801.974.3760  
tech.support@clearone.com