



CALI660

Safelatch™ 2-way 6.5" ceiling speaker with Twist-Fix™ grill

Highlights:

- Secure Safelatch™ system
- Ceramic terminal block
- Excellent off-axis performance (up to 145°)
- Unique TwistFix™ grill design
- Borderless grill design
- Rotary switch for 16W, 32W, 64W and an 8 Ohm tapping
- Shallow built-in depth (120 mm)

The CALI660 is a 2-way ceiling speaker with rear dome, constructed using a 6.5" cone driver, combined with a coaxially mounted 1" soft dome tweeter which is fitted with a phase plug for excellent off axis performance up to 145°.

The 2-way construction combination with metal rear-dome guarantees premium performance for demanding applications. A continuous power handling of 60 Watt (RMS) and maximum power handling of 120 watt is achieved, while fitted with a rotary switch for tapping of the 100V line transformer with tapings for 60W, 30W, 15W and an 8 Ohm bypass connection.



Impedance:



Voltage:



System specifications:


| | | |
|----------------------------|------------------------|--|
| Max. Power | | 120 W |
| RMS Power | | 60 W |
| Sound Pressure (Max. W/1m) | @ 100 V | 106 dB |
| Sensitivity (1W/1m) | | 86 dB |
| Dispersion | Conical | 145° |
| Frequency | Response (± 3 dB) | 90 Hz - 20 kHz |
| | Range (-10 dB) | 65 Hz - 20 kHz |
| Line Transformer Tappings | 1 | 60 W / 167 Ω |
| | 2 | 30 W / 333 Ω |
| | 3 | 15 W / 667 Ω |
| Speaker type | | 2-way coaxial |
| Connection | | Ceramic screw terminal with link through |

Product Features:


| | | |
|-----------------------|--|---------------------------------|
| Cut-out measurement | | 220 mm (\emptyset) |
| Dimensions | | 242 x 120 mm (\emptyset x D) |
| Built-in depth | | 120 mm |
| Operating temperature | | -20 °C ~ 60 °C |
| Construction | | ABS and powder coated steel |
| Mounting | | SafeLatch™ mounting system |
| Weight | | 3.42 kg |

Acoustical data graphs:


Polars:

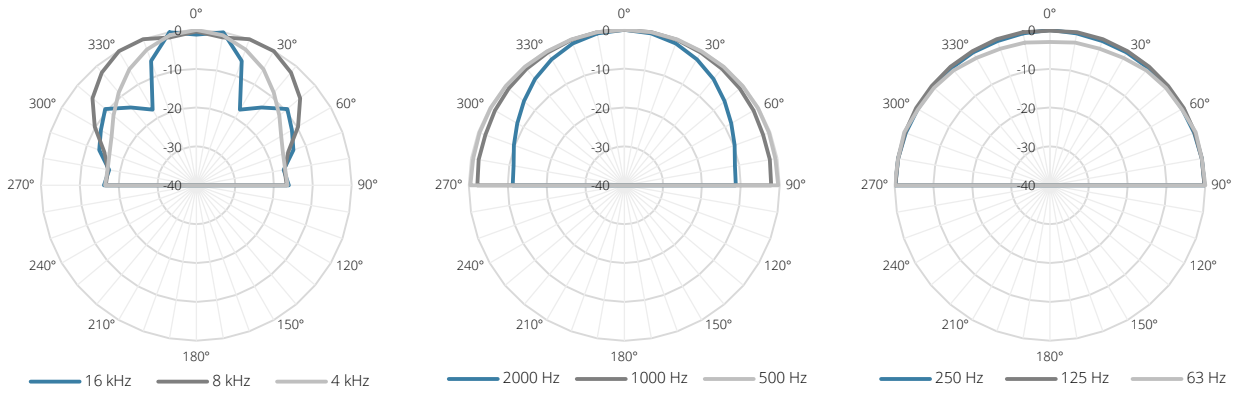


Sensitivity:

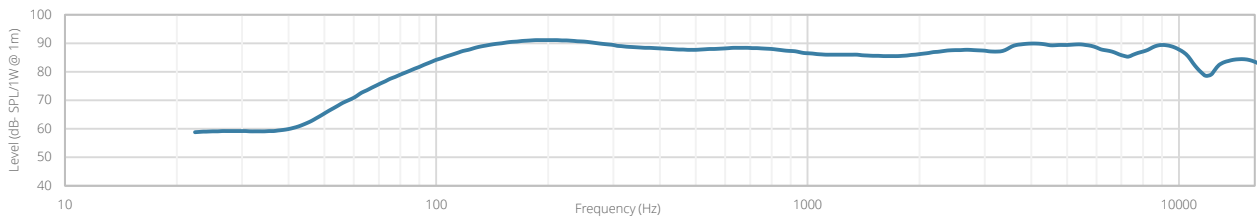



Beamwidth (-3dB):

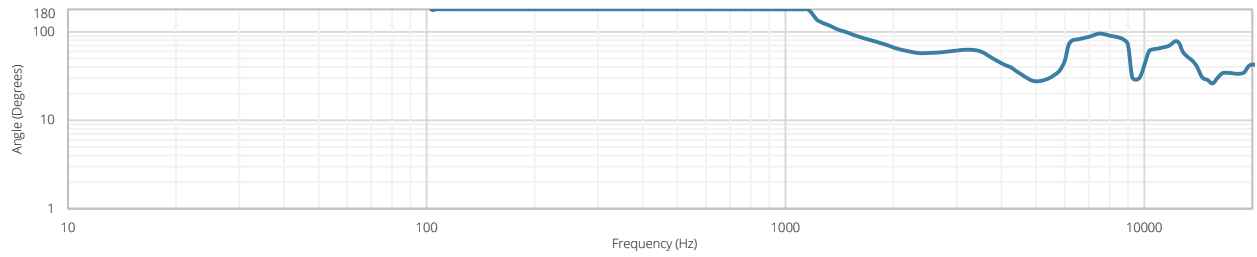

Directivity index:

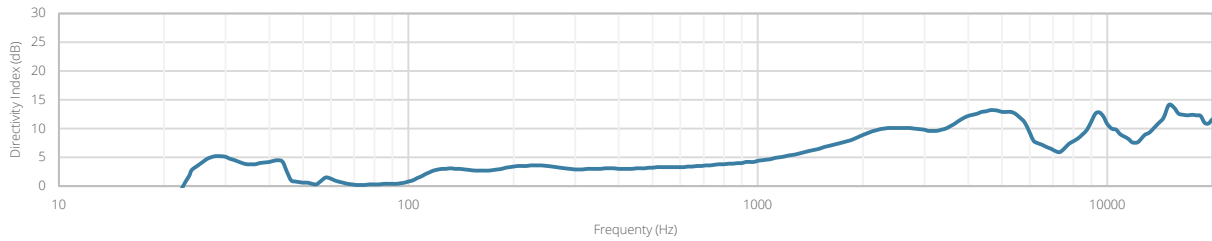

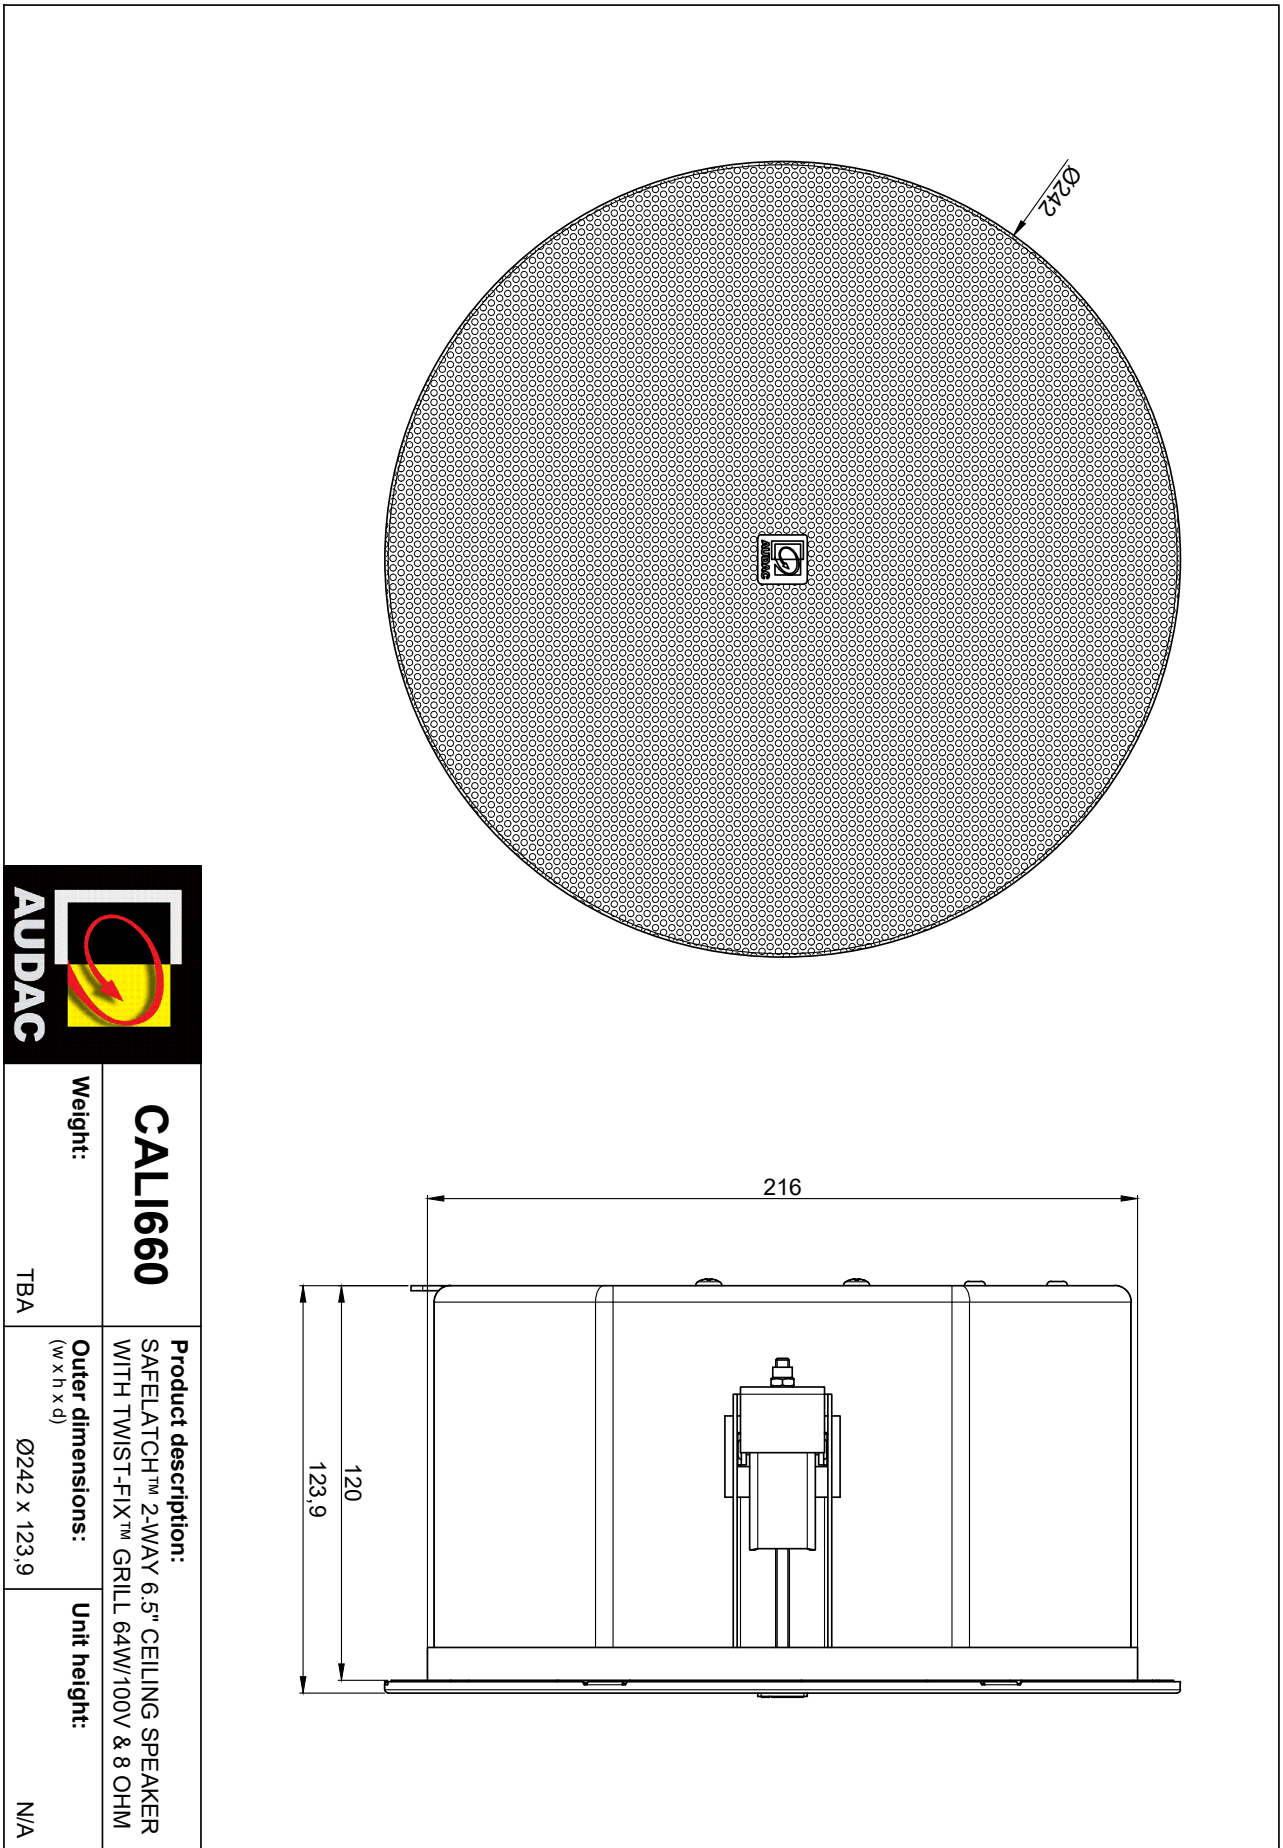

| | |
|---|---|
|  | |
| Weight: TBA | CALI660 |
| Outer dimensions: (w x h x d) $\varnothing 242 \times 123,9$ | Product description: SAFELATCH™ 2-WAY 6.5" CEILING SPEAKER WITH TWIST-FIX™ GRILL 64W/100V & 8 OHM |
| Unit height: N/A | |