

# eHMA60

## MIXING AMPLIFIER

*Powered Mixer*



### PRODUCT OVERVIEW

eHMA60 is a self-powered audio mixer including one MIC input and two MIC/LINE ST inputs. It features a 60W powered output that supports both low ( $4\ \Omega$ ) and high impedance (70V, 100V) loudspeaker lines. It also includes an audio priority system (paging, emergencies, etc.), 2 band tone control, auto stand-by mode, MUTE port and universal power supply unit, being compatible with external 24 VDC IN supply systems. eHMA60 is the perfect integral solution for budget and user-friendly professional audio projects.

### KEY FEATURES

- 1x60W @  $4\ \Omega$  / 70V / 100V
- 1 MIC input
- 2 MIC / LINE inputs (INPUT 1 - Talkover function)
- 2-band EQ (BASS/TREBLE) for Mix Output
- 24VDC power supply included
- 24VDC Phantom Power (external switch)
- MUTE port to remotely mute the unit from an external device, via dry contact closure
- Auto Stand-by function
- Rack mount kit included

### APPLICATIONS


- Retail stores, restaurants and bars
- BGM & Paging solutions, with message priorities and source/volume independent selection

## TECHNICAL SPECIFICATIONS

## eHMA60

Power output	
100V output	60W @ 166Ω 1% THD
Low Z output	66 W @ 4Ω 1% THD
Frequency response (HPF at 70Hz)	70Hz - 30kHz (-3dB)
THD+Noise @ 1kHz Full Power, Speaker Out, Line	<0.08%
Channel crosstalk @ 1 kHz	>65dB
Sensitivity / Nominal impedance	
INPUT 1 LINE	-15dBV to + 15dBV / >10 kΩ
INPUT 2 LINE	-15dBV to + 15dBV / >10 kΩ
INPUT 1 MIC	-20dBV to -50dBV / >1 kΩ
INPUT 2 MIC	-20dBV to -50dBV / >1 kΩ
INPUT 3 MIC	-20dBV to -50dBV / >1 kΩ
CMRR	
MIC (BAL)	>65dB @ 1kHz
Tone control (LINE & MIC)	
BASS	100Hz ±15dB
TREBLE	10kHz ±15dB
Signal Noise Ratio (Gain at center, low Z output)	
LINE	>85dB
MIC (BAL)	>75dB
Talkover (INPUT 1)	
Time	2 sec.
Depth	-30dB
Phantom voltage	
	+24VDC / 10mA max.
Mute	
Configuration	Normally open (by dry contact)
Supply	
DC supply	24V
Mains (using supplied DC adapter)	100-240VAC + External PSU 24VDC
Power consumption	
Pink noise, 1/8 power	33 VA / 17W
Pink noise, 1/3 power	62 VA / 36W
Standby mode (time 2 minutes)	<4W
Dimensions	
Panel WxHxD (knobs excluded)	200 x 44 x 150 mm / 7.87 x 1.73 x 5.91 in.
Weight	1.9kg / 4.19 lb
Shipping dimensions (WxHxD)	260 x 60 x 450 mm / 10.24 x 2.36 x 17.72 in.
Shipping Weight	2.8 kg / 6.17 lb

MECHANICAL DIAGRAM

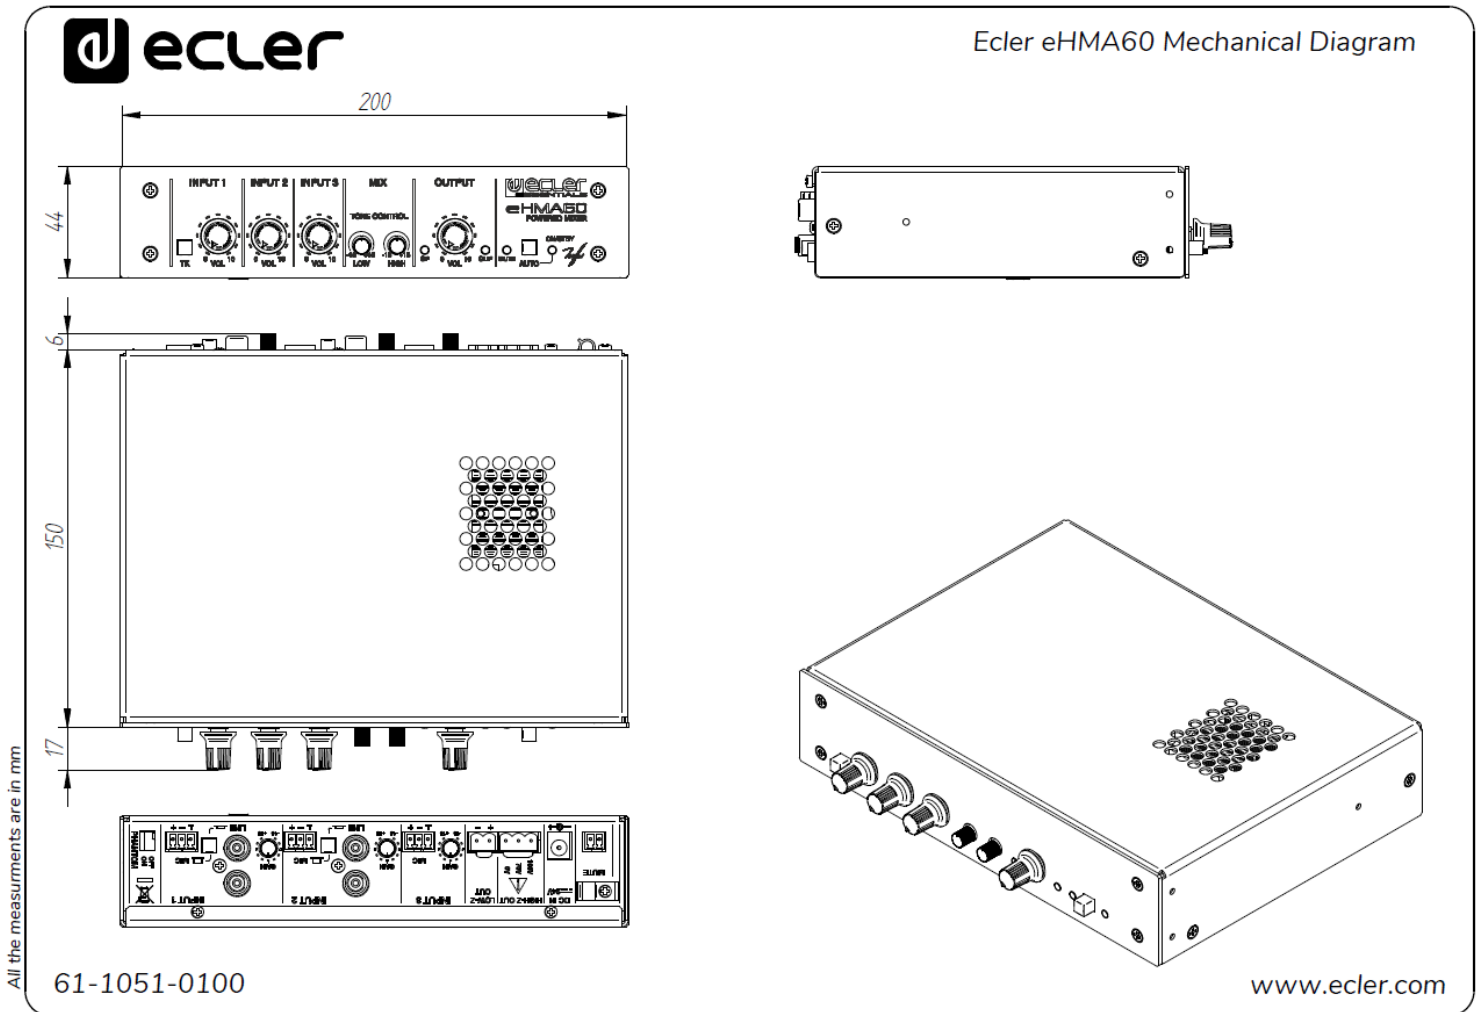

All the measurements are in mm

Ecler eHMA60 Mechanical Diagram

All product characteristics are subject to variation due to production tolerances. **NEEC AUDIO BARCELONA S.L.** reserves the right to make changes or improvements in the design or manufacturing that may affect these product specifications.

For technical requests address to your supplier, distributor or fill the contact form in our website, at [Support / Technical Request](#).

Motors, 166-168 08038 Barcelona - Spain - (+34) 932238403 | [information@ecler.com](mailto:information@ecler.com) | [www.ecler.com](http://www.ecler.com)