

Highlights:

- Stores up to 9 units of 19" Equipment
- Floor standing & wall mounted use
- 2.5 mm thick cold rolled steel frame
- Loading capacity of 160 Kg
- Punched square holes for use with snap-in cage nuts
- Unrestricted air flow due to open-frame design
- Stand alone & in-furniture integration
- Easy assembly in 10 minutes
- Ships as flat-down package

The OPR409 is a professional and solid constructed open-frame rack for 19" equipment compliant to ANSI/EIA RS-310D, DIN41491 and IEC60297 standards which is suitable for wall mounted or floor standing installation. It ensures maximum installation, connectivity and maintenance ease storing up to 9 units of 19" equipment. The open-frame rack has a depth of only 450 mm for easy installation in existing furniture. The rugged construction made of 2.5 mm thick steel allows pre-loading of the equipment before transportation to the installation site. Finishing is done in a black (RAL9004) powder coating with fine structure while punched equipment mounting profiles on front and both sides offer a multifunctional use of the cabinet. Delivered in a flat-down package, the simple structure allows assembly by a single person in a record-breaking time.





Product Features:

Unit height	9 HE
Max. usable depth	450 mm
Max. load standing	160 kg
Max. load hanging	80 kg
Dimensions	518 x 424.05 x 450 mm (W x H x D) (excl. rubber feet)
Weight	7.20 kg
Colours	Black (RAL9004)
Accessories	Included
	4 x Levelling feet
	4 x M8 expanding wall bolt
	24 x Cage nuts + screws

Architects' and Engineers' Specifications:

The rack shall be a 19" open frame rack type suitable for wall mounted and floor standing use which complies to ANSI/EIA RS-310D, DIN41491 and IEC60297 standards with 9 usable rackspaces. It shall have the following dimensions: height 424,05 mm, width 518 mm and depth 450 mm with a weight of 7,20 kg. The frame of the rack shall be constructed out of cold rolled steel with a thickness of 2.5 mm, while punched square holes for use with snap-in cage nuts shall be provided for fixation of the equipment. The finishing shall be done in a textured black powder coating (RAL9004) color and have printed unit measurement indicators. The rack shall ship unassembled as a flat-down package and provide a static load capacity of 160 kg. Fixation points for wall mounted use including expanding wall bolts and leveling feet for floor standing use shall be included.

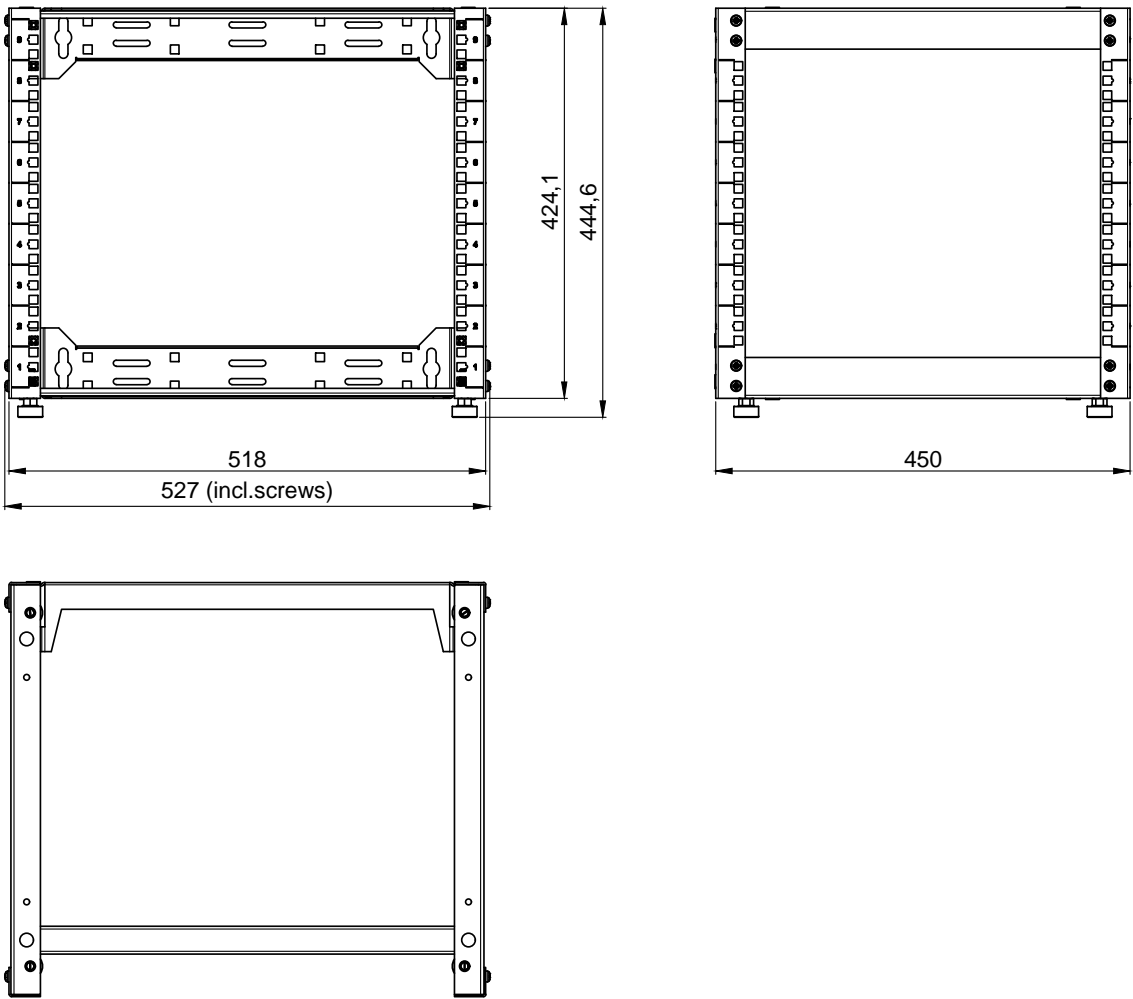

	OPR409		Product description: WALL MOUNTED 19" OPEN FRAME RACK - 9 UNIT - 450MM	
	Weight: 7,20 kg	Outer dimensions: (w x h x d) 527 x 444,6 x 450	Unit height: 9 HE	