

Highlights:


- 8 x German (Type F - CEE 7/4) power outlet
- Male Schuko (CEE 7/7) input connection
- Black aluminium housing
- 1.8 meter cable
- Chassis earth connection point
- 16A ~ 250 VAC / 4000 W Max
- with illuminated switch
- Rotatable 19" mounting ears




The PSR1X8GX are 19" power distribution units, compliant to the ANSI/EIA RS-310D, DIN41491 and IEC60297 standards. They come in three different models, without switch (PSR108G), with illuminated switch on the socket side (PSR108GS) or with illuminated switch on opposite of socket side (PSR118GS). The construction is made using black powder coated aluminum fitted with steel 19" mounting ears on each side. The total height covers a single 19" rackspace, allowing it to be installed in any 19" housing or equipment rack. Using the rotatable side ears, wall mounting is also made possible. Input connections are made using a fixed 1.8 meter connection cable fitted with a male schuko (CEE 7/7) plug, while german (Type F - CEE 7/4) output sockets allows power distribution to eight devices. A chassis earth connection point is provided for easily connecting your rack / enclosure to mains earth, as required by safety regulations.

Product Features:

Dimensions	45.2 x 480 x 44.9 mm (W x H x D)
Switch	Socket side
Cable length	1.8 m
Weight	0.820 kg
Unit height	1 HE
Power handling	250 V AC ~ 16 A / 4000 W

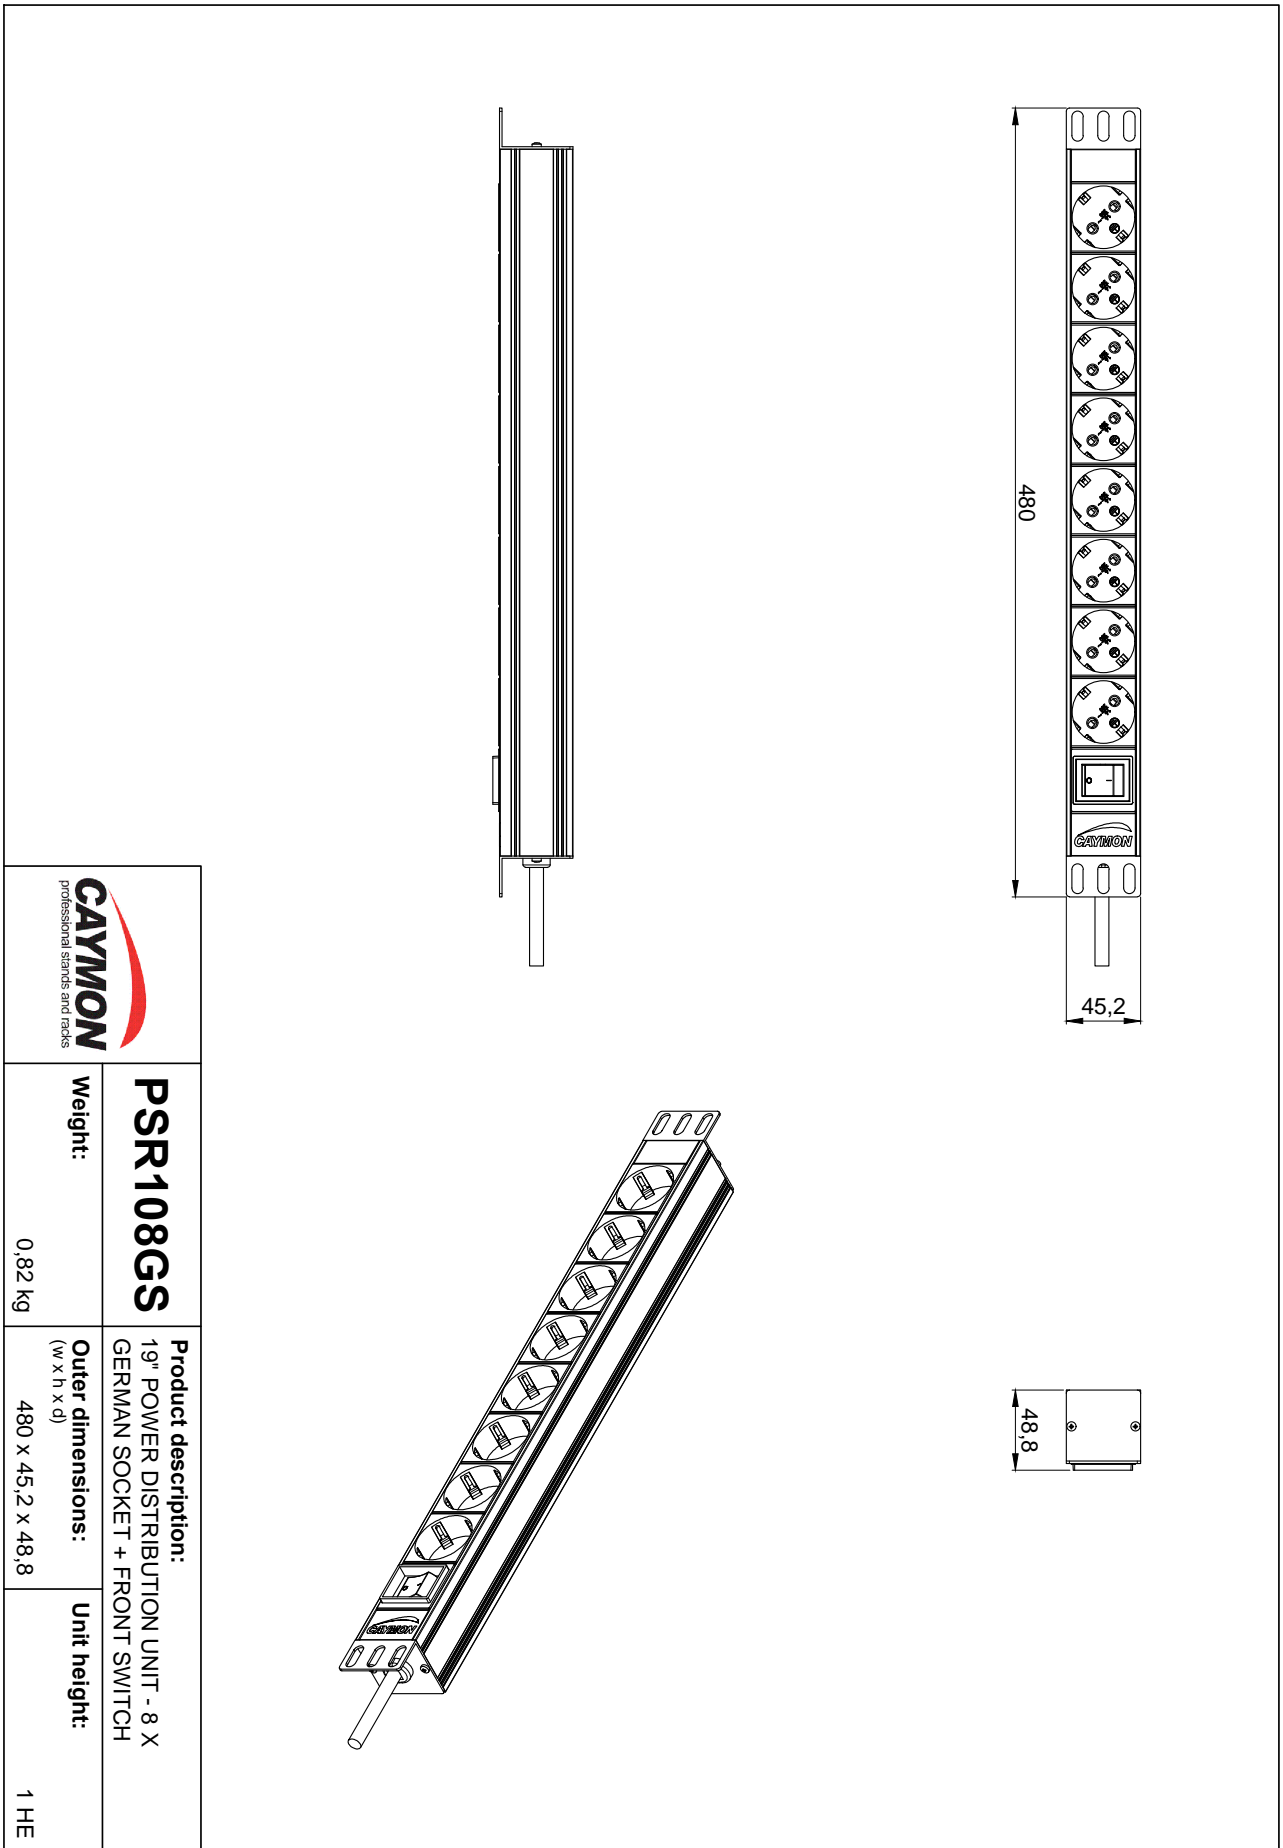

	
Weight:	PSR108GS
0,82 kg	Product description: 19" POWER DISTRIBUTION UNIT - 8 X GERMAN SOCKET + FRONT SWITCH
Outer dimensions: (w x h x d)	Unit height:
480 x 45,2 x 48,8	1 HE