



KRAMER ELECTRONICS LTD.

USER MANUAL

MODEL:

SPK-W511

On-Wall Speakers

P/N: 2900-3001 15 Rev 1

Contents

1	Introduction	1
2	Getting Started	2
2.1	Achieving the Best Performance	2
3	Overview	3
3.1	Defining the SPK-W511	3
4	Installing the SPK-W511	4
4.1	Choosing the Best Location	4
4.2	Installing the Speaker Wires	4
4.3	Installing the Mounting Bracket	5
5	Technical Specifications	6

Figures

Figure 1:	SPK-W511	3
-----------	----------	---

1 Introduction

Welcome to Kramer Electronics! Since 1981, Kramer Electronics has been providing a world of unique, creative, and affordable solutions to the vast range of problems that confront the video, audio, presentation, and broadcasting professional on a daily basis. In recent years, we have redesigned and upgraded most of our line, making the best even better!

Our 1,000-plus different models now appear in 11 groups that are clearly defined by function: GROUP 1: Distribution Amplifiers; GROUP 2: Switchers and Matrix Switchers; GROUP 3: Control Systems; GROUP 4: Format/Standards Converters; GROUP 5: Range Extenders and Repeaters; GROUP 6: Specialty AV Products; GROUP 7: Scan Converters and Scalers; GROUP 8: Cables and Connectors; GROUP 9: Room Connectivity; GROUP 10: Accessories and Rack Adapters and GROUP 11: Sierra Products.

Congratulations on purchasing your Kramer **SPK-W511** On-Wall Speakers, which are ideal for:

- Home theater sound systems
- Outdoor areas
- Multimedia systems

The package includes:

- **SPK-W511** On-Wall Speakers
- 4 meter 24AWG black and white dual color wire
- 2 mounting brackets, 4 knobs and 4 mounting screws
- This user manual

2 Getting Started

We recommend that you:

- Unpack the equipment carefully and save the original box and packaging materials for possible future shipment
- Review the contents of this user manual
- Use Kramer high performance high resolution cables



Go to <http://www.kramerelectronics.com> to check for up-to-date user manuals, application programs, and to check if firmware upgrades are available (where appropriate).

2.1 Achieving the Best Performance

To achieve the best performance:

- Use only good quality connection cables to avoid interference, deterioration in signal quality due to poor matching, and elevated noise levels (often associated with low quality cables)
- Avoid interference from neighboring electrical appliances that may adversely influence signal quality
- Position your Kramer Speakers away from moisture, excessive sunlight and dust

3 Overview

The **SPK-W511** includes a pair of high performance speakers that can be mounted on the wall vertically or horizontally, and indoors as well as outdoors. The mounting brackets are made of painted steel that can be attached to each speaker, letting you rotate each speaker to the left or right.



The speakers are weather resistant but not waterproof, and can withstand the humidity in the air. We recommend that you locate them in an area that is covered and protected from rain.

3.1 Defining the SPK-W511

This section defines the **SPK-W511**:

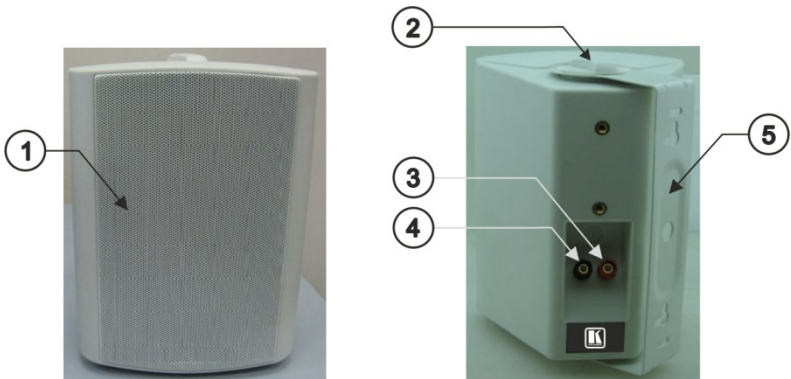


Figure 1: SPK-W511

#	Feature	Function
1	Speaker Grille	Do not remove from the speakers
2	Bracket Knob (4)	Use two knobs to fasten the bracket to the speaker
3	Screw Type Input Port	Positive (red) Connect to the positive stereo analog audio output of the receiver
4		Negative (black) Connect to the negative stereo analog audio output of the receiver
5	Speaker Bracket	Used for mounting the speaker onto the wall

4 Installing the SPK-W511

This section explains how to:

- Choose the best location for your speakers (see [Section 4.1](#))
- Install the speaker wires (see [Section 4.2](#))
- Install the mounting brackets (see [Section 4.3](#))

4.1 Choosing the Best Location

Before installing the speakers:

- Experiment by placing the speakers in different locations before finally deciding on the most suitable location
- Be sure that the wall type is appropriate for the mounting brackets, that is, either solid wood, bricks, concrete, hollow building blocks, or wood studs
- Check that the mounting location is free of obstructions, such as electrical piping, AC ducts or water lines, and so on

4.2 Installing the Speaker Wires

To install the speakers, do the following:

1. Prepare the wires for the speakers:
 - Use the 4 meter 24AWG, black and white dual color wire cut to similar lengths
For achieving high quality sound
 - Measure the length to reach from each speaker to the receiver, adding some access wire length to let you easily remove the speakers from the bracket without having to disconnect the input wires
2. Strip the ends of the wires approximately 3/8 inch.
3. Pass the speaker wires through the round hole in the mounting bracket.
4. Unscrew the negative (black) screw-type connector, insert the wire from the negative terminal on the receiver, and retighten.

5. Unscrew the positive (red) screw-type connector, insert the wire from the positive terminal on the receiver, and retighten.
6. Insert the brackets (see [Section 4.3](#))

4.3 Installing the Mounting Bracket

To install the mounting brackets, do the following:

To install the mounting brackets, do the following:

1. Mark the location of the mounting holes on the wall.
2. Screw the mounting screws onto the wall at the location that you want to mount the speakers.
If the location is backed by wall studs, you can use the wood screws provided. If the location is backed by a gypsum board, use wall anchors (not included in the package).
3. Slide the mounting bracket over the mounting screws so that the mounting bracket is secured to the surface.
4. Slide a speaker into each mounting bracket.
5. Align the bracket screw holes (upper and lower) to those on the speaker and screw a knob to each of the holes to secure the speaker to the bracket.
6. You can slightly loosen the knobs on a speaker to adjust its direction.

5 Technical Specifications

FREQUENCY RESPONSE:	50Hz to 22kHz
FINISH:	White molded plastic
GRILLE:	Perforated metal (white)
TERMINALS:	Gold-plated 5-way binding posts
BRACKETS:	Painted steel with plastic knobs
WOOFER:	5.25" (133mm) polypropylene with rubber surround
TWEETER:	5/8" liquid-cooled polycarbonate
CROSSOVER:	First order high-pass
SENSITIVITY:	89dB 1W to 1M
FREE AIR RESONANT FREQUENCY:	55Hz
NOMINAL IMPEDANCE:	8 Ω average
POWER HANDLING:	30W RMS @8 Ω Power handling is based on the amplifier volume never being set above the point of audible distortion
DIMENSIONS:	18.5cm x 16.5cm x 24.9cm (7.28" x 6.5" x 9.8"), W, D, H
WEIGHT:	One speaker: 2kg (4.4lbs) approx. Shipping weight: (for pair): 4.6kg (10.14lbs) approx.
ACCESSORIES:	2 mounting brackets (including 4 knobs and 4 mounting screws), 4 meter 24AWG black and white dual color wire
Specifications are subject to change without notice at http://www.kramerelectronics.com	

LIMITED WARRANTY

We warrant this product free from defects in material and workmanship under the following terms.

HOW LONG IS THE WARRANTY

Labor and parts are warranted for one year from the date of the first customer purchase.

WHO IS PROTECTED?

Only the first purchase customer may enforce this warranty.

WHAT IS COVERED AND WHAT IS NOT COVERED

Except as below, this warranty covers all defects in material or workmanship in this product. The following are not covered by the warranty:

1. Any product which is not distributed by us or which is not purchased from an authorized Kramer dealer. If you are uncertain as to whether a dealer is authorized, please contact Kramer at one of the agents listed in the Web site www.kramerelectronics.com.
2. Any product, on which the serial number has been defaced, modified or removed, or on which the WARRANTY VOID IF TAMPERED sticker has been torn, reattached, removed or otherwise interfered with.
3. Damage, deterioration or malfunction resulting from:
 - i) Accident, misuse, abuse, neglect, fire, water, lightning or other acts of nature
 - ii) Product modification, or failure to follow instructions supplied with the product
 - iii) Repair or attempted repair by anyone not authorized by Kramer
 - iv) Any shipment of the product (claims must be presented to the carrier)
 - v) Removal or installation of the product
 - vi) Any other cause, which does not relate to a product defect
 - vii) Cartons, equipment enclosures, cables or accessories used in conjunction with the product

WHAT WE WILL PAY FOR AND WHAT WE WILL NOT PAY FOR

We will pay labor and material expenses for covered items. We will not pay for the following:

1. Removal or installations charges.
2. Costs of initial technical adjustments (set-up), including adjustment of user controls or programming. These costs are the responsibility of the Kramer dealer from whom the product was purchased.
3. Shipping charges.

HOW YOU CAN GET WARRANTY SERVICE

1. To obtain service on you product, you must take or ship it prepaid to any authorized Kramer service center.
2. Whenever warranty service is required, the original dated invoice (or a copy) must be presented as proof of warranty coverage, and should be included in any shipment of the product. Please also include in any mailing a contact name, company, address, and a description of the problem(s).
3. For the name of the nearest Kramer authorized service center, consult your authorized dealer.

LIMITATION OF IMPLIED WARRANTIES

All implied warranties, including warranties of merchantability and fitness for a particular purpose, are limited in duration to the length of this warranty.

EXCLUSION OF DAMAGES

The liability of Kramer for any effective products is limited to the repair or replacement of the product at our option. Kramer shall not be liable for:

1. Damage to other property caused by defects in this product, damages based upon inconvenience, loss of use of the product, loss of time, commercial loss; or:
2. Any other damages, whether incidental, consequential or otherwise. Some countries may not allow limitations on how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations and exclusions may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights, which vary from place to place.

NOTE: All products returned to Kramer for service must have prior approval. This may be obtained from your dealer.

This equipment has been tested to determine compliance with the requirements of:

- EN-50081: "Electromagnetic compatibility (EMC); generic emission standard.
Part 1: Residential, commercial and light industry"
- EN-50082: "Electromagnetic compatibility (EMC) generic immunity standard.
Part 1: Residential, commercial and light industry environment".
- CFR-47: FCC* Rules and Regulations:
Part 15: "Radio frequency devices
Subpart B Unintentional radiators"

CAUTION!

- Servicing the machines can only be done by an authorized Kramer technician. Any user who makes changes or modifications to the unit without the expressed approval of the manufacturer will void user authority to operate the equipment.
- Use the supplied DC power supply to feed power to the machine.
- Please use recommended interconnection cables to connect the machine to other components.
* FCC and CE approved using STP cable (for twisted pair products)



For the latest information on our products and a list of Kramer distributors, visit our Web site where updates to this user manual may be found.

We welcome your questions, comments, and feedback.

Web site: www.kramerelectronics.com

E-mail: info@kramerel.com



SAFETY WARNING

Disconnect the unit from the power supply before opening and servicing