

## ONERack<sub>patent pending</sub> extra power

Installation Guide V1.20

MNL-1RK-XTRA-PWR V1.20


Oct 2016

## In this guide

In the box .....	1
Installing the voltage selector .....	2
Fitting the guide rails and dock .....	3
Selecting the voltage, connecting cables and mounting devices .....	4
Contact us .....	5

## In the box

1 voltage selector




1 daisy-chain cable




1 rear dock:

Without bracket,



or with bracket



3 power connectors



2 M3 screws, black



3 M4 screws, silver



In the unlikely event that a component is missing or damaged, please contact [tech.usa@tvone.com](mailto:tech.usa@tvone.com) or [tech.europe@tvone.com](mailto:tech.europe@tvone.com).

## Tools

Phillips PH1 crosshead screwdriver


Pozidriv® PZ1 crosshead screwdriver

## Installing the voltage selector




To avoid damaging your ONERack, build it in a clean, tidy area and protect against electrostatic discharge.

1. Position the voltage selector in the corner of a module so that the tabs sit in the holes.

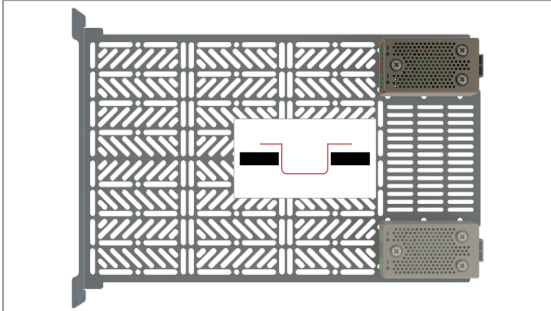


2. Turn the module over and screw the voltage selector in place with three M4 screws.

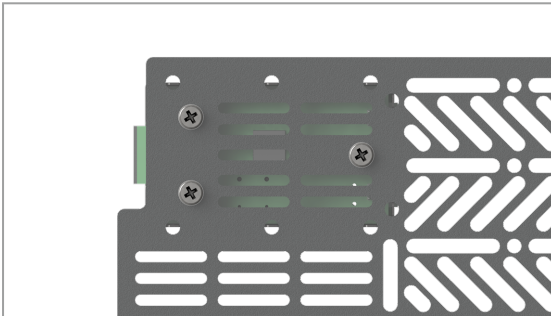

## Fitting the guide rails and dock

1. Slide the module into the groove in the guide rails.

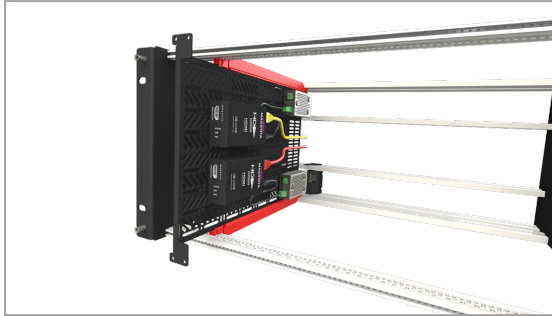

2. Screw the module in place temporarily with one or two M3 screws.
3. At the rear of the chassis, push the dock into the voltage selector.

If you have a dock with a bracket, use the slot in the bracket to help you align the dock. If you have a dock without a bracket, push the connector on the dock into the connector on the voltage selector.



4. Screw the dock in place with two M3 screws.

## Selecting the voltage, connecting cables and mounting devices

For further instructions on connecting and mounting devices on the module, see the Installation Guide for ONERack modules (MNL-1RK-MOD). The guide is available from the Support Documents tab at [www.tvone.com/onerack](http://www.tvone.com/onerack)

## Contact us

### tvONE NCSA

#### North, Central, and South America

📍 2791 Circleport Drive, Erlanger, KY 41018, USA

☎ Tel +1 859-282-7303

Fax +1 859-282-8225

✉ Sales: [sales@tvone.com](mailto:sales@tvone.com)

Support: [tech.usa@tvone.com](mailto:tech.usa@tvone.com)

### tvONE EMEA

#### Europe, Middle East, Africa, and Asia Pacific

📍 Continental Approach, Westwood Industrial Estate, Margate,  
Kent, CT9 4JG, UK

☎ Tel +44 01843 873311

Fax +44 01843 873312

✉ Sales: [sales.europe@tvone.com](mailto:sales.europe@tvone.com)

Support: [tech.europe@tvone.com](mailto:tech.europe@tvone.com)

[www.tvone.com](http://www.tvone.com) [info@tvone.com](mailto:info@tvone.com)

Information in this document is subject to change without notice. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or any means electronic or mechanical, including photocopying and recording for any purpose other than the purchaser's personal use without the written permission of tvONE.

Copyright © 2016 tvONE. All rights reserved.



See our full range of scalers and video processors at  
[www.tvone.com](http://www.tvone.com)

