




RK-COLLAGE Quick Start Guide

This guide helps you install and use your RK-COLLAGE for the first time. For more detailed information, go to <http://www.kramerav.com/manual/RK-COLLAGE> to download the latest manual or scan the QR code on the left.

Step 1: Check what's in the box

RK-COLLAGE 19" 2U Rack Adapter including:

- ✓ 1 Pan bracket (B000283-1) (2)
- ✓ 1 Top bracket (B000285-1) (3)
- ✓ 2 Wing nuts (2703-000022) (4)
- ✓ 1 Faceplate (F000314-1) (5)
- ✓ 6 Spring washers (2728-000004)
- ✓ 6 Screws (2701-000138) (6)

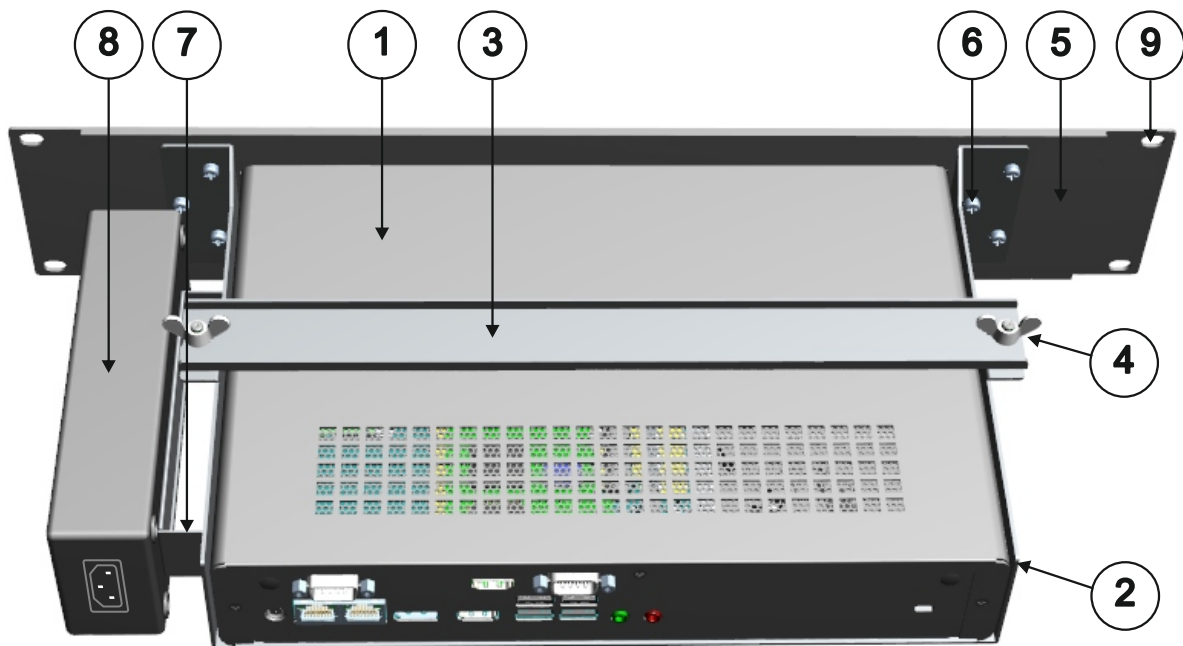

Step 2: Assembly and Installation Procedure

1. Place the **VIA Collage** (1) into the pan bracket (2) with the front of the **Via Collage** on the side that screws into the faceplate (5). Make sure all air vents remain open and unblocked.
2. Place the top bracket (3) over the **VIA Collage** and connect it loosely to the pan bracket with the 2 wingnuts (4).
3. Place a spring washer (not shown) on each of the 6 screws (6) and lightly screw the pan bracket to the faceplate (5) with 3 screws on each side.
4. Center the **VIA Collage** in the faceplate opening and tighten the 6 screws.
5. Tighten the wingnuts (4) on the top bracket (3).
6. With the power cord facing toward the back, place the VIA power supply (8) against the open bracket (7) on the side of the pan.
7. Attach the power supply to the open bracket using 2 cable ties (not included, shown at right).
8. Screw the final assembly into a 19" 2U rack using the holes on the outside of the faceplate (9).

