CARYS C15LSa Preliminary Information.





Carys C15LSa is a combined LF / Sub extension for the Carys C6 column loudspeaker. The self-powered C15LSa can provide amplification to a partner C6 column, creating an elegant 2 box, full range PA system. A locking mechanism ensures stability and super-fast, plug 'n play setup.

A leading edge 15" neodymium LF transducer with Tetracoil technology allows C15LSa to deliver high SPL and excellent efficiency. The LF / Sub features a naturally cardioid tuned vent, allowing it to be deployed discreetly close to walls and corners without sacrificing audio clarity.

C15LSa is equipped with an AUDIOFOCUS A4M SCiO Class-D amplifier module with comprehensive integrated DSP. The amplifier can be remotely monitored and controlled via a browser-based WebUI.

Carys C15LSa is built in Belgium by skilled craftspeople and state-of-the-art machinery before being coated in tough, weather-resistant polyurea to safeguard your investment.

Technical specifications

Cardioid

Complete Solution

((0)

40Hz - 90Hz

Description	COMBINED LF / SUB + AMPLIFIER SOLUTION
Transducers	LF: 1 x 15"
Frequency range (-6dB)	40Hz – 90Hz
SPL peak (1)	137dB preliminary
Processing	Dedicated AUDIOFOCUS SCiO presets
Rigging	Locking connector for a Carys C6 Colum
Audio Connectors	IN: 1×3-point XLR • LINK: 1×3-point XLR 1×4-point speakON output for Carys C6 connection
Network connectors	1 x etherCON for control
Power Connectors	IN: 1×3-point powerCON TRUE1TOP LINK: 1×3-point powerCON TRUE1TOP
Nominal Impedance	8 Ohm
Dimensions (H x W x D)	912 x 410 x 500mm 35.91 x 16.14 x 19.69 inches
Weight	35kg / 77lbs
Finish	Highly resistant polyurea coating
Cabinet	High grade birch plywood



(1) Peak level measured at 1m half space compression limit of 3dB using multi-tone

Тор

CARYS C6

high-performance column loudspeaker



Frequency range : 80 Hz- 20 kHz SPL max : 135.5dB preliminary Ref. : 48212

Software



SCiO Connect & Control your amplifiers

AUDIOFOCUS SCiO amplifiers can be securely monitored and controlled anytime, anywhere over the network.


Our intuitive Web UI network manager is web-based, eliminating the need for software downloads, and allows multiple amplifiers to be managed from your preferred device.

The network manager offers the comprehensive processing options you would expect from a high-end system controller.

For more detailed information **please visit the AUDIO-FOCUS SCiO page.**

Beamwidth

CARYS C15LSa beamwidth

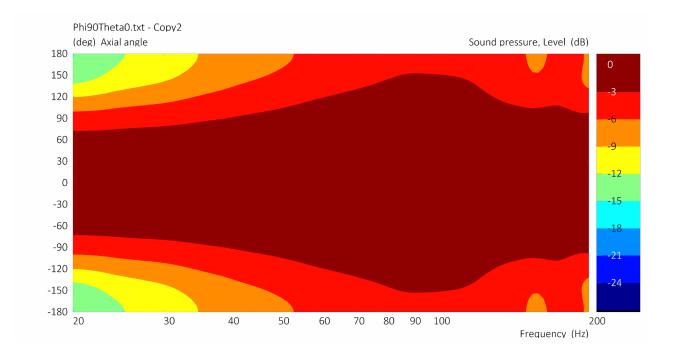

Contact & Links

Need more informations about our products ?

www.audiofocus.eu info@audiofocus.eu www.facebook.com/AudiofocusPage/ www.facebook.com/groups/AUDIOFOCUS/

Scan QR Code to view the CARYS C15LSa product's web page.



Follow Us.

