

# ARROCC CC210Wa Constant Innovation

(Preliminary information)



CC210Wa is a core element of the ARROCC constant curvature system, mounting twin 10" LF transducers in a V formation and featuring Tetracoil Double Voice Coil technology for exceptional power, precision control, impulse response and handling of transients. A large next-gen titanium diaphragm 4" LF compression driver delivers superior linearity and mid-band clarity.

Thanks to a forthcoming adjustable horn plug option, CC210Wa's wide 90° x 25° coverage can be adjusted to 70° x 25°V when desired. ARROCC employs the 3D printed SEVERIN precision waveguide for ultra-precise definition of coverage patterns, achieving the optimal listening experience for all audience members.

CC210Wa (wide) can be freely combined with CC210Na (narrow) cabinets and 118Sa subs, forming a flexible, modular solution for every medium throw sound reinforcement scenario. Versatile rigging options allow ARROCC systems to be flown or stacked horizontally and vertically, pole mounted, or fixed to walls or ceilings.

Intuitive SCiO software enables remote control of CC210Wa's integral amplifier from any device.

ARROCC CC210Wa is built in Belgium by skilled craftspeople and state-of-the-art machinery.



## Technical specifications

Description	Wide coverage 2x10" self-powered constant curvature loudspeaker
Transducers	LF: 2x10" • HF: 1x1.5" exit compression driver / voice coil diameter 4"
Frequency range (-6dB)	55Hz - 19kHz
Nominal directivity (-6dB)	90°x25° • External plate option for 70° coverage
Peak SPL (1)	135 dB
Processing	Dedicated AUDIOFOCUS SCiO presets
Rigging	Horizontal and vertical rigging frames, hanging bracket, and pole mount
Audio Connectors	IN: 1x3-point XLR LINK: 1x3-point XLR
Network Connectors	1x etherCON for control
Power Connectors	IN: 1x3-point powerCON TRUE1TOP LINK: 1x3-point powerCON TRUE1TOP
Dimensions (H x W x D)	626 x 343 x 400mm • 25 x 13,5 x 15,7 inches
Weight	32kg / 71lbs
Finish	Highly resistant polyurea coating
Cabinet	High grade birch plywood

(1) Mtone 12 dB crest factor

## Subwoofer

---

### 118Sa



Touring self-powered compact  
18" subwoofer





Ref. : 48441

# Beamwidth

## ARROCC CC210Wa 90° beamwidth

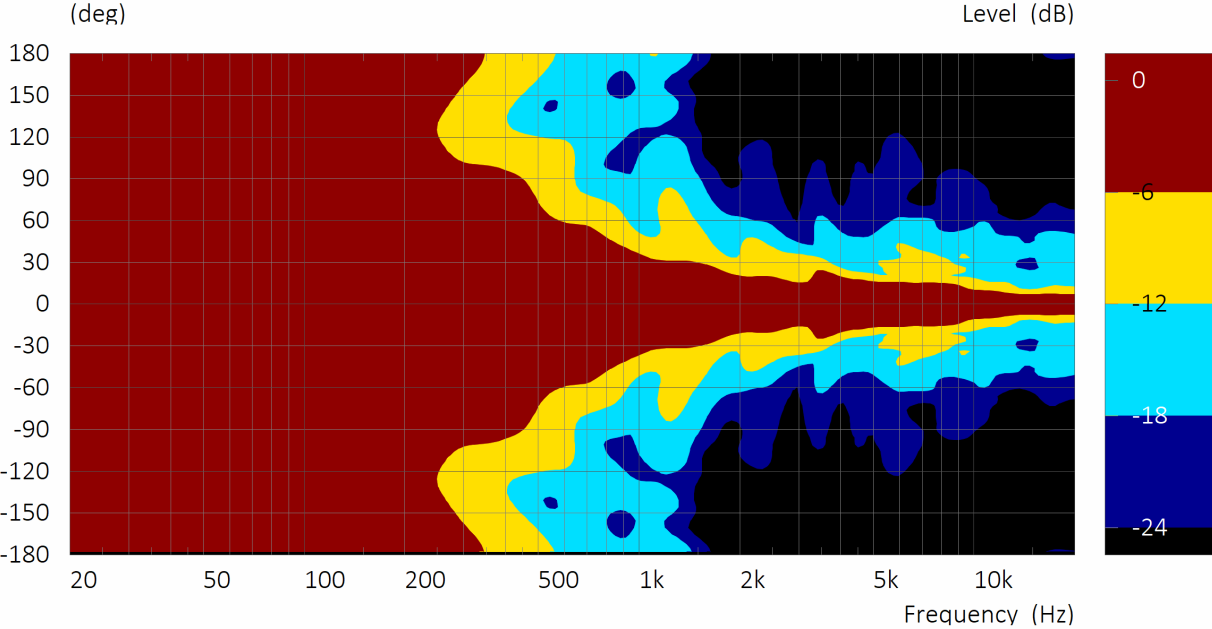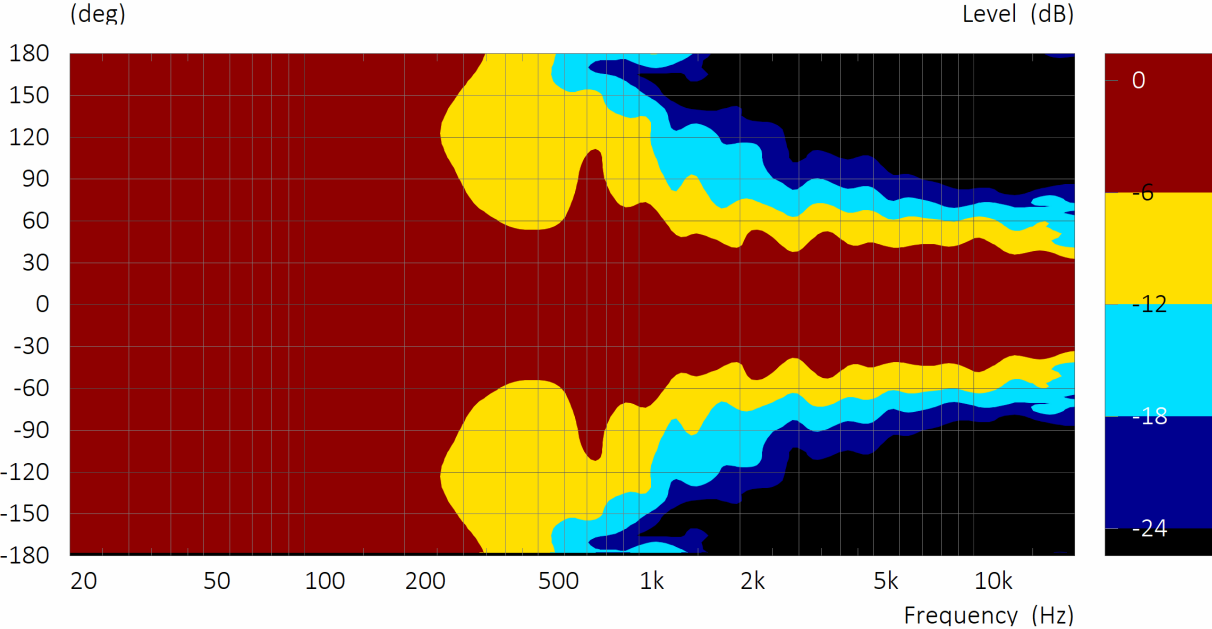

# ARROCC CC210Wa 70° beamwidth

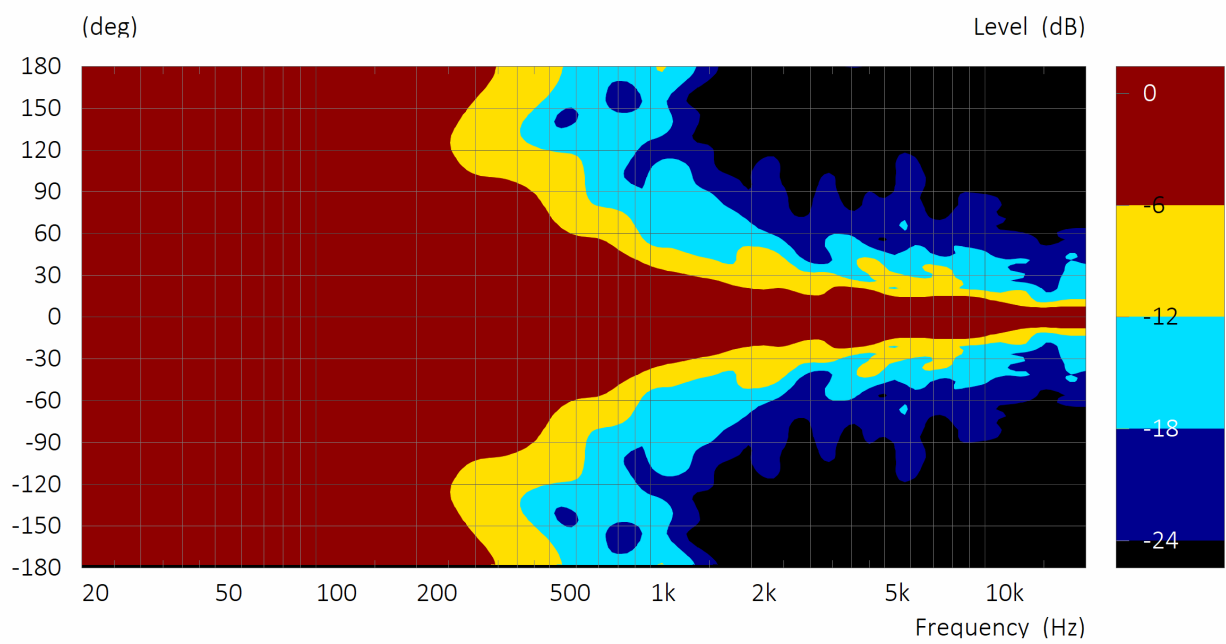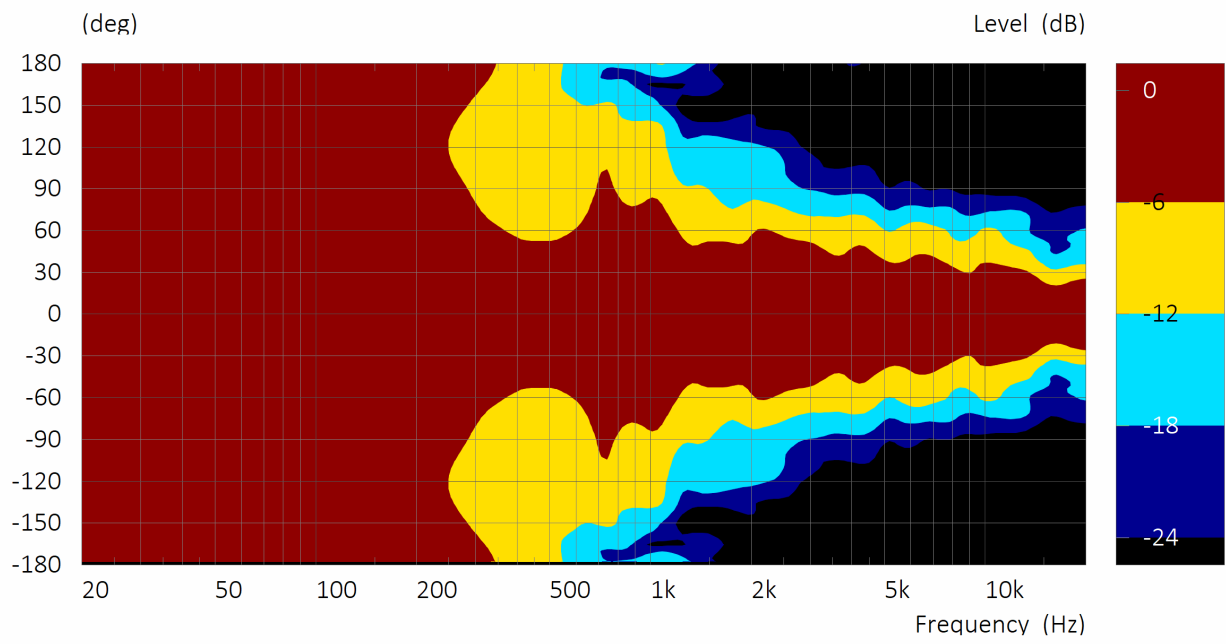

## Contact & Links

---

**Need more information about our products ?**

[www.audiofocus.eu](http://www.audiofocus.eu)

[info@audiofocus.eu](mailto:info@audiofocus.eu)

[www.facebook.com/AudiofocusPage/](https://www.facebook.com/AudiofocusPage/)

[www.facebook.com/groups/AUDIOFOCUS/](https://www.facebook.com/groups/AUDIOFOCUS/)

**Scan QR Code to view the ARROCC CC210Wa web page:**



**Follow Us.**

