





These keypads are versatile and useful products for both system integrators and smart home users alike. These keypads can send commands to any Ethernet controlled or relay controllable device in your system. The buttons are suitable for all environments and PoE (Power over Ethernet) support allows for creative placement of the keypad within your space without needing to be concerned about keeping it near a live power source. Additionally, the integrated clock and calendar based scheduling feature allows you to trigger macros to control devices within your installation at a specific time, or on a recurring schedule. The sophisticated appearance makes this keypad an elegant and decorative addition to your living or working space.

### PANELS

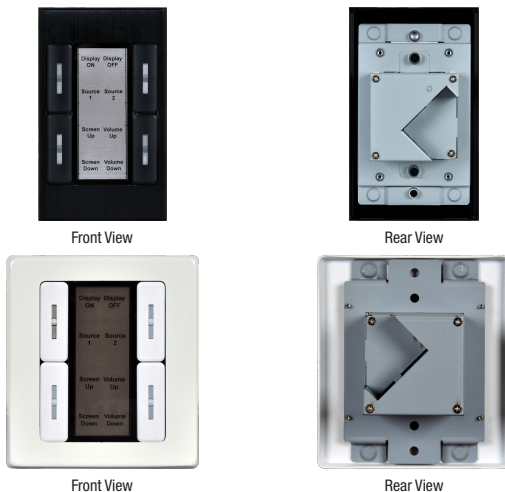

### DIAGRAM

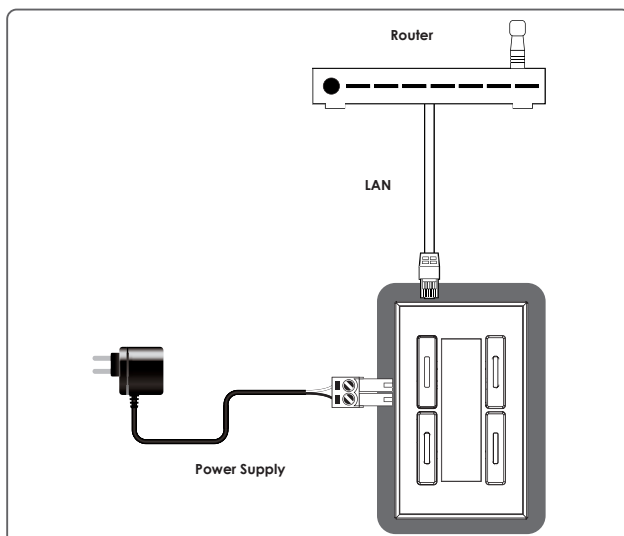

### FEATURES

- 32 macros for controlling user equipment
- Up to 128 total commands can be stored and used across all macros in the system (up to 16 per macro)
- Supports time and date macro scheduling (single and recurring)
- Supports condition checking within macro commands for expanded macro design flexibility
- Supports 120 hours of backup power for the internal clock and schedule function to protect against blackouts and temporary power loss
- Supports customizable daylight savings time configuration
- Can be powered by an Ethernet switch that supports the IEEE 802.3af PoE standard
- Controllable via keypad, Telnet and WebGUI

### SPECIFICATIONS

|                           |  |
|---------------------------|--|
| Interfaces                |  |
| <b>Input Port</b>         | 1 DC 5V  |
| <b>Control I/O</b>        | 1×LAN (RJ-45)  |
| <b>Service Port</b>       | 1×USB2.0 (Mini B)  |
| Power                     |  |
| <b>Power Supply</b>       | PoE (802.3af) from LAN Port or 5V/2.6A DC (Optional) (US/EU standards, CE/FCC/UL certified)  |
| <b>Power Consumption</b>  | 1.1W   |
| Enclosure                 |  |
| <b>Chassis Material</b>   | Plastic, Metal (Steel)   |
| <b>Chassis Color</b>      | Black/White  |
| <b>Dimensions (W×H×D)</b> | US<br>114.3mm×69.8mm×40mm [Case Only]<br>114.3mm×69.8mm×40.5mm [All Inclusive]<br>EUK<br>100mm×90mm×38.9mm [Case Only]<br>100mm×90mm×40.15mm [All Inclusive] |
| <b>Weight</b>             | 145g   |
| Field Firmware Update     |  |
| USB Flash Drive, WebGUI   |  |

### ORDERING INFORMATION

| Model No.               | Product Description                              |
|-------------------------|--|
| <b>CDPW-K3US</b>        | 8-Button Control Keypad (US Faceplate, Black)    |
| <b>CDPW-K3US-W</b>      | 8-Button Control Keypad (US Faceplate, White)    |
| <b>CDPW-K3EUK</b>       | 8-Button Control Keypad (EU/UK Faceplate, Black) |
| <b>CDPW-K3EUK-W</b>     | 8-Button Control Keypad (EU/UK Faceplate, White) |
| <b>ADP-0274AEGS00CB</b> | 5V/2.6A Adapter                                  |