

WPNETEX

DIGITAL CONTROLS AND PANELS

EclerNet wall panel control



PRODUCT OVERVIEW

WPNETEX is an EclerNet compatible wall panel, featuring an LCD screen, a digital rotary encoder and 4 control keys. Its end-user control features are volume control, source and preset selection and 3 band EQ functions. Equipped with Ethernet interface and compatible with PoE (Power over Ethernet) or local power supply (optional).


KEY FEATURES

- Remote control panel of EclerNet devices
- PoE power or by local power supply (WP-PSU model, optional)
- Ethernet communication interface

APPLICATIONS

- End user control in centralized, distributed or hybrid fixed installations over long distances
- Integrated digital audio and control solutions using Ethernet networks
- BGM & Paging solutions
- Retail, education, corporate, fitness and Horeca

MECHANICAL DIAGRAMS

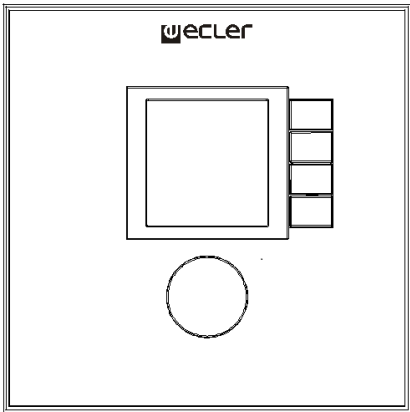

TECHNICAL DATA

DIGITAL CHARACTERISTICS		
Control keys	Encoder, 4 Control keys	
Indicators	LCD Display – 128x128 pixels	
Communication Standard	Ethernet	
SUPPLY CHARACTERISTICS		
PoE Power Supply	PoE: class 0 802.3af PoE PD compliant	
External Power supply	12 - 24VDC	
Maximum Power Consumption	From PoE:	35mA / 1.6W
	From Ext Power:	1.5W (WP-PSU power supply model)
MISCELLANEOUS		
Connector	RJ45 Remote port	
Dimensions	WxDxH 86mm x 30mm x 86mm / 3.38" x 1.18" x 3.38"	
Weight	120g / 0.26 lb	
Cable Quality	CAT-5e or better	